


Oct. 1979
\$1.40* NZ \$1.60



**ELECTRONICS
TODAY
INTERNATIONAL**

SPACELAB

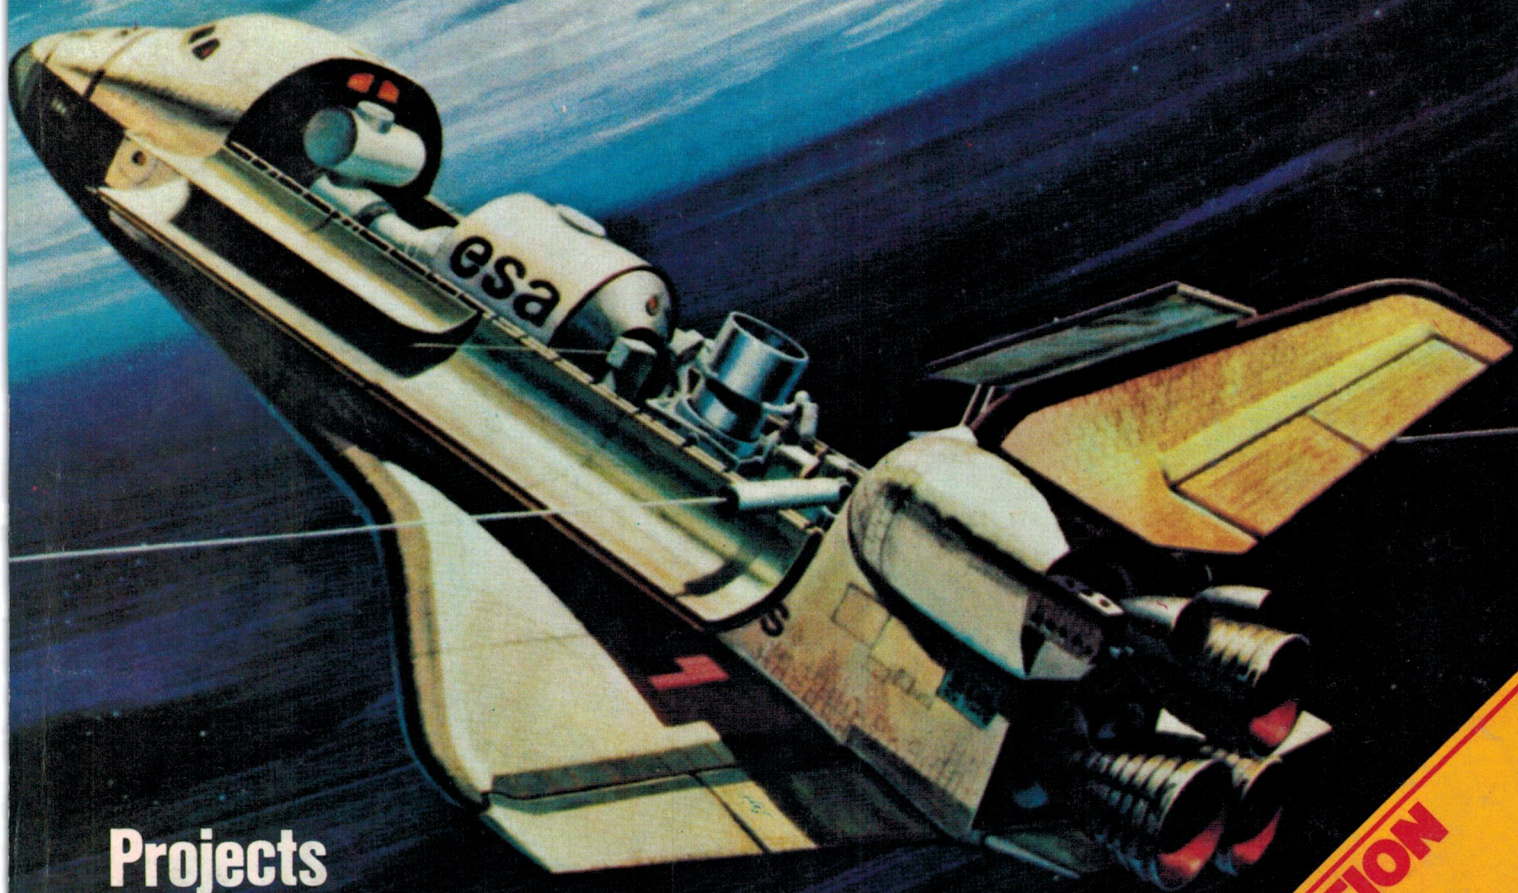

Projects

'Series 4000' moving-coil preamp
General purpose process timer

Danger! -Beryllium Oxide
Marine electronics feature

GREAT HI-FI SECTION

*Audio Pro sub-woofers reviewed
plus two other reviews
*How to improve your sound

A new dynamic generation of Maxell tapes.

When Maxell announces an improvement in the quality of its tape, you can bet the improvement has to be pretty dynamic. In fact, we think our new generation has even gone beyond our own standards of superior sound reproduction.

Take our high level (CrO₂) position tape — the UD-XL II. Maxell engineers have succeeded in expanding its dynamic range in the middle-low frequency range by 1 dB, while also pushing its sensitivity by 1 dB in the high frequency range. Then look at our normal position UD-XL I, UD and LN tapes — our engineers expanded the dynamic range at all frequency points, while also boosting output in the high frequency range. The new dynamic range, of course, allows for better music reproduction even for LN-type tapes.

On the UD-XL I and II, we also added an exclusive shell stabilizer for significantly improved tape running and track positioning.

One thing hasn't changed on all Maxell tapes — our functional features like 4-function leader tape, replaceable index labels for UD-XL series tapes and Maxell's through-production system — your guarantee of quality and superior sound reproduction.

Tape selector position UD-XL I, UD, LN: Normal position (Normal bias/120 μ sec. EQ)
UD-XL II: High level position (High level bias/70 μ sec. EQ)



For details on all Maxell Recording Tape write to Maxell Advisory Service, P.O. Box 307, North Ryde, N.S.W. 2113

Available time length UD-XL I: 60, 90 min./UD-XL II: 60, 90 min.
UD: 60, 90, 120 min./LN: 60, 90, 120 min.

Distributed by...
HAGEMEYER

WT126/79

maxell[®]
simply excellent



ELECTRONICS TODAY INTERNATIONAL

Registered for posting as a publication —
Category B

CONTINUING our line of quality audio projects that we started with the 'Series 4000' stereo amplifier, this month we have a **moving-coil cartridge preamp** with performance to match the commercial jobs from many manufacturers. The **Electromyogram** is completed this month — the fairies at the bottom of the dark-room were kind to us ! For those readers who potter with pc boards or dabble in darkrooms, we have a **universal process timer** project. It uses an interesting timing technique yet is still simple to build and calibrate.

Spacelab was coming off the drawing board while **Skylab** was capturing the attention of technologists and spacewatchers around the world. By the time Skylab was causing numerous people some anxiety, **Spacelab** components were rolling off production lines around the world. Our cover story starts on **page 16**.

A calibrated rope (i.e: knotted at intervals) and a lump of wood served old sailors well. Modern sailors wouldn't be seen dead using a genuine 'log', the electronic variety is all the vogue. **Marine applications of electronics** is the theme of our other feature this month; page 24 please.

Hi-fi can be an expensive hobby - but what hobby isn't ? Nevertheless, would you believe you can **improve your sound without depleting your wallet** ? I won't say they're straightforward, but the techniques described in our sound feature can make the effort worthwhile. Extended bass is the dream of many an audiophile. The technique being explored by many enthusiasts and manufacturers is the 'sub-woofer' loudspeaker. Our review of the **Audio-Pro Ace Bass** will open your eyes. Also this month we review a recently released amplifier and an unusual direct-drive turntable.

For the computer fan we have a look at Rod Irving's **64K RAM board** by Central Data and review a new book on **Programming in Basic**.

Curious about VMOS devices ? Get a close look — our data sheet this month gives device characteristics and circuits for the CTC range of **RF power VFETs**.

Letters — by popular demand a 'letters to the editor' page has been re-introduced. How about writing us some good letters then?

Get into it — **180 pages of good reading**, things to do, news and views plus a few good laughs along the way.

Roger Harrison, Editor

Contents

advertisers

Audio Reflex	115,163
Agfa	120
Arena	129,162
Acoustic Monitor	92,125,133
Adaptive Electronics	12,146
A&R Soanar	33,132
Ampec Engineering	80
Applied Technology	78
Audio Engineering	96
Audioson	128
All Elect. Components	52
Auditec Aust	67
Advent Loudspeakers	68
Adcola	74
Barratt Lighting	97
Bell & Howell	12
Concept Audio	23
Convoy	108
Calculator Supermarket	157
Computerware	68
Cema	168,174,176
Diggerman Electronics	48
Dicker, JW	149
David Reid	28
Dick Smith	8-9,22,89,150-151
Defence Recruiting	66
David Ryall	160
Daneva Control	32
Dindy Marketing	166
Delsound	171
DR Industries	168
Depro Industries	176
Elect. Calculator Discounts	67
Electrocrafft	166
Electronic Agencies	32
Emac Industries	113
Emona Enterprises	175
Fisonic Audio	109
Ferguson Transformers	61
GES	169
GMH	74
Hagemeyer	2,179
Hanimex	152
H. Rowe & Co.	167
HF Coates	168
IFTA Aust	85
Insound	171
John F. Rose	144
Jaycar	100
Jorlen Audio	104
JW Haymes	166
Kenelec	71
Mod. Boating	146
Maruni Corp	123
McGills	72
Microprocessor Applications	165
Matra Musical	175
Maurice Chapman	174
National Panasonic	180
Pre-Pak	59
Planet 3 Systems	72
Plessey Components	171
Radio Parts	54
Ross Music	99
Rod Irving	76
Radcom	176
Radio Despatch	174
Stewart Electronics	76
SM Electronics	74
Sheridan Electronics	36
Sony	124
Sansui	116-117,136-137
Scope Labs	15
Semcon	156
Syntec	105
Systems Automation	154,155
Semis Unlimited	39
Trio Kenwood	131,161
Texas Instruments	139-142,145
TDK Aust	101
Tasman Electronics	47
Tandy	107,173
The Electronic Circuit	175
Vicom	53
WC Wedderspoon	112
Warburton Franki	38
Xenon World Imports	132



**ELECTRONICS
TODAY
INTERNATIONAL**



COVER

Spacelab is a large-scale co-operative venture amongst a number of international agencies who are sharing the construction and the benefits of the project. Designed as a re-usable vehicle, to be carried into orbit aboard the space shuttle, its first mission, scheduled for the middle of next year, will carry 76 scientific and technological experiments.

Picture from a painting by M. Alvarez, courtesy NASA. Design by Ivy Hansen.

news

NEWS DIGEST

10

Pioneer 11's startling discovery; MIDAS — a data goldmine; Biomedical Symposium; Inter-satellite links; Amplifier modules, position vacant.

COMMUNICATIONS NEWS

82

Seaphone; Amateur history research; Orbiting antenna farms; Air band receivers; Communications computer; low cost broadband antenna; VFETs and more.

SHORTWAVE LOGGINGS

86

Norway goes SSB; 1980 World Radio TV Handbook; Costa Rica in English; New Arab voice planned; Tibet on air; Surinam returns.

PRINTOUT

143


Imagination machine; Rumours; Anadex updated; 6800 ROM/PROM; TRS-80 gets full-size floppies; Apple II plus; Computer Faire... and then some.

features

SPACELAB

16

Detailed report on the scientific goals, the experiments and the technology in this unique project that is likely to have a profound effect on the development of science and technology into the next decade.

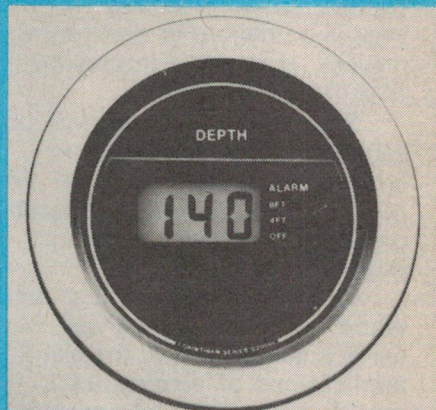

ELECTRONICS IN THE BOATING BOOM

24

Ancient mariners used a length of knotted string to judge their speed. These days there are half a dozen different ways of doing that job electronically. Electronics goes down to the sea in boats — a report from Les Bell.

BERYLLIUM

— HOW DANGEROUS

34

Beryllium oxide is a compound with many applications in electronics — but it's deadly if mishandled. Find out what not to do!

AN AUTOMATIC AUDIO EQUALIZER

158

Description of a novel microprocessor-controlled audio equalizer system.

projects



477: "SERIES 4000" MOVING-COIL CARTRIDGE PREAMP

40

The second in our 'Series 4000' line of quality audio projects, this preamp is for the increasingly popular moving-coil style of cartridge and features performance rivalling the best commercial units.

576: ELECTROMYOGRAM Pt. 2 62

Full construction details for this fascinating instrument.

573: UNIVERSAL PROCESS TIMER 55

This timer has a wide variety of applications — not all of them necessarily in electronics.

577: GENERAL PURPOSE POWER SUPPLY 49

This dual 12 V supply was designed to suit the moving-coil cartridge preamp but has many other applications.

LAB NOTES 69

The ETI-111 IC Power Supply revisited. A reader takes a fresh look at one of our popular older projects, revising it to suit modern components.

SHOPAROUND 75

Where to obtain parts for projects; products of special interest to constructors etc.

KITS FOR PROJECTS 177

PCB PATTERNS

Unfortunately, space requirements this month did not permit publishing the pcb patterns behind a page of blue.

sound

SOUND NEWS 93

Teac's heavy metal; Care for tapes; Concise Components; Super-conductivity cables plus more new releases, brief news.

SOUND BRIEFS 98

Metal tape standards; Super stereo; Class A hybrid; Computer-controlled speaker; Tax on tape.

IMPROVE YOUR SOUND WITHOUT DEPLETING YOUR WALLET 102

Improve the dynamic range, depth and definition of your system by careful adjustment of your cartridge and arm — by Allen Wright and Rowan McCombe of Audio-lab.

THE NEXT REVOLUTION 110

Digital recording techniques offer considerable improvements over existing analog techniques. An overview of what it's all about.

AUDIO-PRO SUB-WOOFER 118

An amazing performer in a small black box.



AUDIO REFLEX ARA 665 STEREO AMPLIFIER 126

A conventionally-styled, reasonably-priced amplifier offering good performance.

SANYO TP929 DIRECT-DRIVE TURNTABLE 134

This turntable features a 120-pole linear motor where the platter is the rotor. Good performer, too.

general

64K RAM BOARD REVIEW 153

The Central Data 64K Ram Board, marketed here by Rod Irving Electronics offers big memory expansion for S-100 system owners.

WHAT TO DO WITH YOUR MICROCOMPUTER? 164

Some thoughts on what to do with your machine now that you know it intimately.

LETTERS 7

We have re-introduced a readers' letters page, by popular demand.

MEET THE STAFF 37

Two more of the 'back room boys' this month. The brains behind those great projects.

IDEAS FOR EXPERIMENTERS 77

Three solid pages of everything from a 640 VDU mod. to a TV advert blanker!

DATA SHEET 90

VMOS RF power devices have distinct advantages. This month we list data on the CTC range of 25, 50 and 100 watt devices, circuits included.

IONOSPHERIC PREDICTIONS 89

The DX is performing nicely, thanks to a well-mannered ionosphere.

BOOK REVIEW 169

A recent publication on Programming in BASIC.

ETI SERVICES 6

Where to find us; how to obtain back issues and photostats, subscriptions and microfilm. How and where to make enquiries.

MINI-MART 172

BLOOD PRESSURE KIT OFFER 73

next month



VIDEO CASSETTE RECORDERS

A comprehensive report on the machines available, how the various systems work and what they will do.

THE DAEDALUS PROJECT

Fascinating report on a detailed study of feasibility of building and launching an unmanned interstellar probe.



ALTEC MODEL 15 STUDIO MONITORS

Review of an innovative set of speakers featuring an interesting "Tangerine radial phase plug" in a horn driver.

Z-80 S-100 CPU

That cryptic little lot will set the computer enthusiasts collective pulses racing.

At last it has arrived! — the central processing unit to go with the ETI S-100 computer projects. Another beauty from David Griffiths - of 640 VDU fame.

COMING SOON

Another metal detector. Our last one was (still is!) very popular, this is one to beat them all. Guitar practice amplifier — play to your heart's content without annoying the neighbours, features mains or 12V operation.

Although these articles are in an advanced state of preparation circumstances may affect the final content. However, we will make every attempt to include all features mentioned here.



Editor

Roger Harrison VK2ZTB

Managing Editor

Collyn Rivers

Project Manager

Phil Wait VK2ZZQ

Special Assignment

Les Bell GM4CFM

Editorial Staff

Jonathan Scott VK2YBN

David Tilbrook VK2YMI

Jan Vernon

Technical Illustrator

Ivy Hansen

Layout/Assembly

Bill Crump

Reader Services

Jan Collins

Advertising (Sydney)

Bob Taylor (Manager)

Geoff Petschler

Advertising (Melb.)

John Colquhoun

Production Manager

Bob Izzard

Subscriptions & Circulation

John Oxenford

Acoustical Consultants

Louis Challis & Associates

Editorial-Advertising Offices

Sydney

3rd Floor,
15 Boundary St 2011
Rushcutters Bay
Phone: 33-4282

Melbourne

150 Lonsdale St.
Melbourne, Vic 3000
Phone: 662-1222
Telex: AA 34340

Advertising

Adelaide

Admedia Group
24 Kensington Rd
Rose Park S.A. 5067
Phone: 332-8144

Brisbane

Geoff Home
60 Montanus Drive
Bellbowrie QLD 4070
Phone: 202-6229

Hobart

H.W. Lincone
23 Lord St
Sandy Bay Tas. 7005

Perth

Aubrey Barker
133 St George's Tce
Perth W.A. 6000
Phone: 322-3184

Electronics Today International is published by Modern Magazines (Holdings) Ltd, 15 Boundary St, Rushcutters Bay, NSW 2011. It is printed (in 1979) by Wilke & Co, Browns Rd, Clayton, Victoria and distributed by Australian Consolidated Press. Recommended retail price only.

ETI subscriptions cost \$19.00 per year (inc. postage) within Australia. Cost elsewhere is \$24.50 (inc. postage — surface mail). Airmail rates on application.

Photostats are available of any article ever published by ETI. We charge a flat \$2.00, regardless of page quantity, from any one issue of ETI. Thus, if the article is in three issues the cost is \$6.00. Send orders to the address below. The charge includes postage.

Back issues: cost \$1.40 each plus 45 cents post and packing. We can supply **only** the following issues:

1976: Nov Dec

1977: April May June July Aug Sept Oct Nov Dec

1978: Jan Feb Mar April May June July Aug ~~Sept~~ Oct Nov Dec

1979: all to date

Binders available for \$4.50 plus 90 cents post NSW, \$2. other states.

Orders to: **Subscriptions Department, ETI 3rd Floor, 15 Boundary Street, RUSHCUTTERS BAY, 2011 NSW**

READER ENQUIRIES

By Mail: There is no charge for replies but a foolscap-size stamped addressed envelope **must** be enclosed. Queries relating to projects can **only** be answered if related to the item as published. We cannot advise on modifications to projects, other than errata or addenda, nor if a project has been modified or if components are otherwise than specified. We try to answer letters as soon as possible. Difficult questions may take time to answer.

By phone: We can only answer readers technical enquiries by telephone after 4 pm. In enquiring by telephone about back issues or photostats, please ask for the "Subscriptions Department".

33-4282

MICROFILM

Microfiche editions of this publication are available by annual subscription from Microsystems Pty Ltd, PO Box 188, North Sydney, NSW 2060.

COPYRIGHT

The contents of Electronics Today International and associated publications is fully protected by the Commonwealth Copyright Act (1968).

Copyright extends to all written material, photographs, drawings, circuit diagrams and printed circuit boards. Although any form of reproduction is a breach of copyright, we are not concerned about individuals constructing projects for their own private use, nor by pop groups (for example) constructing one or more items for use in connection with their performances.

Commercial organisations should note that no project or part project described in Electronics Today International or associated publications may be offered for sale, or sold, in substantially or fully assembled form, unless a licence has been specifically obtained so to do from the publishers, Modern Magazines (Holdings) Ltd or from the copyright holders.

Liability:

Comments and test results on equipment reviewed refer to the particular item submitted for review and may not necessarily pertain to other units of the same make or model number. Whilst every effort has been made to ensure that all constructional projects referred to in this edition will operate as indicated efficiently and properly and that all necessary components to manufacture the same will be available no responsibility whatsoever is accepted in respect of the failure for any reason at all of the project to operate effectively or at all whether due to any fault in design or otherwise and no responsibility is accepted for the failure to obtain any components parts in respect of any such project. Further, no responsibility is accepted in respect of any injury or damage caused by any fault in the design of any such project as aforesaid.

LETTERS

Dear Sir

May I congratulate the magazine on its new format (June issue). I was very pleased to see the hi-fi reviews and the feature articles on computers in particular, also naturally the projects and enlarged ideas for experimenters pages.

Your rival magazine had better watch out.

**A Greco
Clayton, Vic**

Dear ETI and Dindy

Please find enclosed my second order for cassette tapes (No. 1 was \$300 +). I would like to say thanks for the speedy service on my first order and thanks to ETI for offering such a good product in the magazine that has become a catch phrase in any electronic business — household or group.

It is good to see such quality in an Australian produced magazine. The projects cover a wide spectrum of interests and the technical articles are well researched and well explained.

Once again thanks to ETI and to Dindy for this really marvellous offer.

**Matthew Howard
St. Ives, NSW**

Dear Sir

After publication of your project No. 725 (SSB Generator), I for one would be very interested to see a complete SSB Transmitter design for 80 M published. Incorporation of a VFO would be desirable. A multiband unit would be nice also but maybe that's asking too much.

Other amateurs and novices I know have shown intense interest in the generator, so I'm sure it would be a welcome project overall.

**T Dalziel
Wanniassa, ACT**

Dear Sir

The new format is excellent, and I appreciate your broadening the mag to include such things as the flyby reports, etc. I also like the sectioning into the appropriate subject areas.

My personal interest is audio, and I thought you may like some reader feedback.

I intend building a very high quality preamp with a low output impedance (100Ω) — but whether it will interface with your unit or not I don't know. Please, how about full specs.

You've made a good start in audio

with your new amp — but how do you follow it up and keep the thing alive? I've a few suggestions — how about "Project Audio" continuous extension of your design. It really should have been obvious that it's a little like a shag on a rock — it doesn't interface either with your equalizer (what a waste — how else would you control a high quality amp) — nor is it powerful enough to run your top quality TL speaker (min. 75 W!) — so how about some extensions, e.g. can the amp deliver 75 W or more (reading the specs for the output transistors, don't understand why not — could you explain?) — you suggest that they could be paralleled. Why don't you do it and check. (I'd imagine a resistor value would have to be changed) — and show how two can be coupled out of phase to give 200 W.

How about using the LED VU meter to show not only output power but the tone control input as well so that they can be attenuated to give optimum strength (it could be switchable)?

How about upgrading your active crossover to use better more modern components (the 4136 for example!). I've noticed that many companies have brought out upgraded substitutes for common ICs — how about some info on them so that existing (and aging) units can be upgraded.

Finally (thank God, I hear you cry!) how about letters and advice (including small project changes, e.g. a buffer for your power amp to make it a bit more useful).

I hope this lot is food for thought — good luck and keep up the good work (yes, you do plenty, but I don't feel the need to change it).

**Ian Catt
Baulkham Hills, NSW**

Dear Mr Catt

I'm glad you like the new format and presentation. With regard to the ETI 470 60W audio amp modules, the input impedance is close to 100 ohms. To successfully drive these modules and achieve the amplification 'accuracy' attainable, the source impedance should be one-tenth to one-twentieth the input impedance, i.e. 5 to 10 ohms.

Personally, as much as possible, I try to adhere to the principle 'do it properly or not at all'. In magazine publishing, it is not always possible — disasters do occur and articles have to be replaced

last minute — but we are working towards improving the editorial material presented in ETI.

With regard to the 'Series 4000' amplifier project, it is being followed up. This issue includes the 'Series 4000 moving coil cartridge preamp'. The object was to suggest a group of audio components with the title — hence the word 'series'. The moving coil preamp will be followed by a number of other projects — the eventual aim being to present a cohesive set of related audio components for home construction.

We cannot present these projects one on top of the other in successive issues. Apart from the necessary development time required (five months for the stereo amp, three months for the moving coil preamp, etc.) the individual projects need time to gain acceptance — both amongst readers and parts suppliers. We exist in a symbiotic industry — we depend on the parts suppliers to support our projects and they depend on us to present well-designed, popular projects.

In summary, I think you can see we have spent a lot of time and thought very carefully about the many factors involved in this series of audio projects.

The Series 4000 will successfully drive transmission line speakers to painful levels in many a suburban lounge room. Indeed, we have given a demonstration in a very large church-style hall at Sydney University with the Series 4000 driving a pair of Tannoys in a large TL enclosure. Sound levels were quite adequate.

Extending the power level of the ETI 470 60 W module is not possible as the safe-operating area of the output devices will be exceeded. Bridging two modules can be done, but it is not simple. We have this on our list of "things to do". As for the VU meter, active crossovers, etc., there are only so many hours in a day and so many demands on our time from enthusiasts with other interests we're hard pressed to get as much done as we do!

For a glimmer of hope, an interface/driver for the 60 W module is being designed. It will appear . . . eventually.


Here is the "Letters" page! Ideas for Experimenters have already been extended and the "Lab Notes" occasional Column for such semi-project extensions as you suggest was introduced several issues back.

**Roger Harrison
Editor**

COMPUTER CORNER

NEW! DOT MATRIX PRINTER

Suber line printer features 125 characters per second print speed and a one line buffer memory. The interface is 8 bit parallel-standard and paper feed is by pin feed method. Size 450w x 375d x 185h (mm). Weight approx. 10kg.
★ Uses inexpensive fan-form paper.
★ Upper and lower case characters
★ 80 columns




\$995.00
Cat X-3255

OWN A TRS-80? READ THIS AND SAVE!

The Dick Smith Mini Disk Drive is 40% cheaper than the Tandy Disk Drive, and has 14% larger capacity. See our advert on page 24 of September Electronics Australia for more exciting details!


\$379.00 Cat X-3230



SAVE \$20.00 ON TAPE READERS!

Be quick! Easy-to-build paper tape reader kit for all computer enthusiasts. Hurry! NOW

\$75.00!
Cat K-3466



NEW!

Dick Smith cassettes have been up-graded. Brilliant new packaging tells you they're different - find out for yourself just how good they really are! Try a couple of these quality tapes: better still, try ten (types can be mixed) to obtain the bonus book below!



C-60LN: \$1.50 ea. (Cat C-3350)
C-90LN: \$2.00 ea. (Cat C-3352)
C-90UD: \$2.75 ea. (Cat C-3354)
EVEN LOWER FOR TEN PLUS!

The inside story on cassettes



BONUS:

Buy any ten 'Dick Smith' cassettes; or any Dick Smith cassette deck or recorder and receiver FREE a copy of our new book: 'The inside story on cassettes'. Tells you all about this incredibly versatile recording medium, and how to get the best from your tapes and tape recording equipment. Also available separately: Cat B-6035 @ 50c

BARGAIN PACKS:

Buy your electronic components in bulk and save a fortune on one off prices. Dick Smith component packs are ideal for the hobbyist, serviceman, etc, and give real savings over one-off prices. Computer-selected values - no junk!

RESISTOR PACK: 300 resistors, around 60 values. Great value: less than 2c each! Cat R-7010

\$5.90

GREENCAP CAPACITOR PACK: Another value-packed assortment. Not a lot of weird rubbish - 60 often used greencaps. Cat R-7040

\$6.50

CERAMIC CAPACITOR PACK: Over 60 of the most commonly used types. Voltages no less than 50V, 10pF to 0.1uF values. Cat R-7050

\$4.50

TAG TANTALUM CAPACITOR PACK 50 high grade TAG tantalums, high reliability capacitors. Limited quantity of this pack available. Cat R-7060

\$4.75



WHAT'S NEW

GLASS BREAKAGE DETECTOR

Incredible! Up-to-the-minute technology gives protection for shops, offices, homes, etc. Simply glues on window; if glass breaks, it actuates alarm system. Is not affected by tapping or other sounds; sensor reacts only to sound of glass actually breaking. Approx. 25mm cube.

\$29.50

Cat L-5230



WHAT'S NEW

IC INSERTING TOOL

Here's the perfect way to insert DIL IC's without damage. Special IC insertion tool has metal holder and plunger to protect MOS ICs, plunger has variable pitch for differing insertion depths. A must for the serviceman, hobbyist, production line, etc etc etc.

\$4.95

Cat T-4640



WATCH THIS SPACE AND FIND OUT WHAT YOU MISSED

Each month all of our stores feature an outstanding special which is actually BELOW COST! N.B. Specials are strictly while store stocks last. Don't miss out!

LAST MONTH:

REAR WIPER KIT
Normally \$39.95; reduced to \$17.90

SAVING \$22.05

INFRARED ALARM

\$89



SENSATIONAL NEW ALARM SYSTEM - Infrared photoelectric relay system with projector and receiver in one case. Easy to install - simply stick reflector panel opposite the infrared unit and any person cutting the invisible beam will set the alarm off. The alarm can be a buzzer, siren or lamp connected to the 12V DC 1A (max.) output of the infrared unit. Can also be used as a counter - to check number of visitors or count items on a conveyor system. Includes sensitivity control, three position alarm setting and has an effective coverage of 0.8 to 15 metres. Dimensions: 90(w)x145(h)x190(d)mm. Weight 1.55kg.

Cat L-5050

WHAT'S NEW

STOPWATCH/CLOCK/TORCH

Now there's no excuse for anyone - even someone like Norm - to get involved in sport. Highly accurate electronic stop watch/clock features split and lap timing, with LCD readout. Normally a six digit clock with an in-built torch for map reading, etc. Incredible value!

\$39.50



WHAT'S NEW

CASE FOR PROJECTS

LOOK! deluxe aluminium case for many types of projects. Liquidated stock of CB manufacturer; think of the uses! Front & Rear panels Mounting bracket Speaker holes Heavy sub-chassis Cut-outs for display, switches, meters, etc. Limited quantity only!

\$7.95

Cat H-2507




WHAT'S NEW

AT LAST!

A go-anywhere TV antenna - for car, house, boat, etc etc.

You can mount this in vertical or horizontal mode for either polarity transmission - so it is ideal for use on a caravan. Double folded dipole with reflector for maximum gain and minimum ghosting on all channels. Comes with mounting bracket.

\$23.95



BALUN:

Want to use co-ax? You'll need a balun. This one is weatherproof, strong.

\$2.50

Cat L-4452



LCD CLOCK MODULE

12.50

INCREDIBLE ACCURACY!

Scoop purchase! Time & date modules, ideal for phone times. Liquid xtal disp. buy direct from the importer and save. Battery included! Incredible value

\$14.95

Cat X-1039



WHAT'S NEW

IN A WORD: BRILLIANT!

3-way light: fluoro, spot and flasher for campers, in the car, home, wherever you need a portable lamp. Hand held or strap supplied.

\$14.95



BACK TO 1977 PRICES!

All of the products in this section are less than, or the same, as our 1977 catalogue prices. This, despite two years of inflation and worsening exchange rates! DICK KEEPS PRICES DOWN - AND YOU SAVE MONEY



AM/FM PORTABLE RADIO
Listen in to broadcast band or new FM stations. Cat A-4364. In 1977: \$12.50
IN 1979 ONLY \$9.95!

FLUSH MOUNT CAR SPEAKERS:

Great tone, easy to mount. Cat A-6985
STILL ONLY \$18.00 pair.



WEDGE MOUNT CAR SPEAKERS.

For rear shelf mounting, or where space is a problem. Thousands sold! Cat A-6980
STILL ONLY \$16.00 pr



HORN SPEAKER

Ideal for alarms, CB, extension speakers, etc. Cat C-2705
1977 PRICE: \$8.90
NOW ONLY \$6.90!



40 PIECE SOCKET SET
Includes ratchet driver, sockets. Ideal for the handyman. Cat T-4670
STILL ONLY \$16.50



DC POWER TIMING LIGHT
Keep your car's timing spot on. Saves money; stops wasting petrol. Cat A-8508
STILL ONLY \$23.50 IN 1979!



CAR RADIO ANTENNAS
LEFT: Combination AM/FM/CB antenna. Saves having to drill another hole! Cat D-4418.
RIGHT: Electric aerial. Why get out of the car on cold rainy nights? Stops vandals, too! Cat A-7360.
1977 PRICE: \$23.00
NOW ONLY \$19.00!!

VALUE!

For computer enthusiasts, experimenters: This calculator keyboard kit with a host of uses: comes complete with screws, PC board, all keys and spring pad. Ideal for combination locks, alarm systems, too. Cat K-2010

\$375



FERRIC CHLORIDE IS NOW IN EASY-MIX PACK...

Yes! No more mucking about with powders, waiting for them to dissolve. Now Dick has hand packs of ferric chloride in concentrated liquid form: just pour into water and you have instant solution. Makes 600ml of etchant. Cat H-5652
20% MORE ETCHANT FOR THE SAME PRICE!



MINI HI-FI SPEAKERS

Top performance from such a tiny speaker. If space is a problem, or if you don't want your speakers to look obtrusive, try these. They're only 120 x 120 x 190mm, and performance is equal to many speakers costing two and three times as much! Try them: you'll be pleasantly surprised! Cat A-2375
\$99.50 pair



SPEAK EASY WITH DICK SMITH SPEAKER AND ACCESSORIES...

A TOUCH OF CLASS!



Smart white cover for up to 20cm speakers. You've seen them in factories, offices, etc. Now available to the hobbyist. Use them in the home for intercoms, music systems, etc. Cat C-2646

\$2.75

BUDGET OVAL SPEAKERS



A speaker for \$2.50? Who's kidding? Certainly not us. These incredible value car radio/stereo speakers are 16 ohm impedance (so they'll suit anything!) and measure 100 x 150mm. Cat A-7132

\$2.50!!!


EXTENSION SPEAKERS

Need an extension speaker out near the pool, in the workshop, etc? This is the one for you. 8 ohm impedance, suits transistor radios, CBs, stereos, etc. With 2.5m cable and 3.5mm plug. Cat A-2451

\$9.50


SCOOP EXTENSION HI-FI SPEAKERS

Incredible bulk buy bargains: famous brand Rand Arena hi-fi speakers, ideal for an extension to your hi-fi system. Were selling for \$75.00 pair, our price only \$49.50 pair! Cat A-2465
\$24.75 each



Our new address:
Dick Smith Electronics Pty Ltd
Cnr Lane Cove Road & Waterloo Road,
North Ryde, NSW. 2113. Tel. 8883200

- There you will find:
- Dick Smith Distributors (our wholesale section)
 - Service Centre (including quality control section)
 - Mail Order Centre (for any mail order enquiries)
 - Purchasing and importing department
 - Administration (including management & accounts)
 - Advertising & Marketing and, of course our huge
 - Bulk warehouse and distribution centre



NORTH RYDE

WE'RE MOVING!

Like Topsy, we've grown and grown... For the third time in as many years, we've out-grown our warehouse and head office space. So in October we are moving to a brand new, multi-million dollar warehouse and head office complex at North Ryde - approximately 8km from our present head office in Artarmon. Of course, our retail stores will stay in their present locations.

NEW BOOKS FOR YOUR LIBRARY:

COMPUTER BOOKS:

Basic Computer Games, by David H. Ahl. 190 pages of just about every game you could think of for your microcomputer. Yes, including Super Star Trek & Blackjack! Cat B-2351 \$9.95
Due in stock mid November

ZILG S/FORM DATA BOOK

Data book of all Zilog products, including the famous Z-80 microprocessor. Also includes data on memory products (6104, 6114, 6142 RAMS), PIO etc and the range of Zilog board subassemblies. Cat B-2360 \$5.00

ZILG Z-80 ASSEMBLY LANGUAGE PROGRAMMING MANUAL

In order to program the Z-80 at machine level, it is convenient to use an assembly language. This book gives the programmer all information to identify Z-80 addresses & memory locations in simpler opcodes & operands. Cat B-2362 \$9.95

Basic Computer Games

AMATEUR RADIO BOOKS:

ARRL ANTENNA ANTHOLOGY

The best of recent QST magazine HF antenna articles & theory presentations. 150 pages. Every ham should have a copy! Cat B-2205 \$6.25

AUSTRALIAN AMATEUR CALLBOOK

Yes, it's here: the all-new up-dated 1979 edition of the WIA callbook. It's time you updated yours, isn't it - with the ver-growing number of licenses. 98 pages. Cat B-2317 \$2.95

THE HAM EXAM CRAM BOOK

Another brilliant study aid from the Westlake Radio Club. Intended for those sitting for the ADOP exam - essay or multiple choice type. Has sample question & answer section, too! Cat B-2314 \$2.95

ANTENNA ANTHOLOGY



BOOK OF THE MONTH:

ELECTRONICS: A practical introduction by B. Brown & P. Carr, 92 pages. Intended as a school textbook (part of the 'fundamentals of senior physics series for HSC students') but also a great 'start-up' book for the hobbyist, too. Gives a basic introduction, with practical experiments. Cat B-3005 \$5.95

THE P.C. BOARD USED IN THIS BOOK:


Exclusive to Dick Smith, this board and the practical experiments in the book help explain the workings of digital electronics. Cat H-8902 \$6.95

COMING SOON: DICK SMITH'S 'FUN WAY INTO ELECTRONICS'

The all-new introduction to electronics. At a Dick Smith store or bookseller SOON!

CHRISTMAS IS ONLY TWO MONTHS AWAY!

VIDEO BRAIN X-1182



'VIDEO BRAIN' COMPUTER KEYBOARD
Full function computer style keyboard with 37 keys, silver plated double sided board, double sided edge connector (0.1" spacing) and high quality computer-grade push buttons with interchangeable key tops. The manufacturer of this quality keyboard went broke and we bought the lot. You reap the benefit! This keyboard must have cost twice as much to manufacture as the price we're asking for it. All keys can be individually accessed by cutting PCB tracks.

VIDEO BRAIN' COMPUTER KEYBOARD
Full function computer style keyboard with 37 keys, silver plated double sided board, double sided edge connector (0.1" spacing) and high quality computer-grade push buttons with interchangeable key tops. The manufacturer of this quality keyboard went broke and we bought the lot. You reap the benefit! This keyboard must have cost twice as much to manufacture as the price we're asking for it. All keys can be individually accessed by cutting PCB tracks.

RECTANGULAR LEDS!

Give your projects that real pro look with these smart rectangular LEDs. Available in red or green. Cat Z-4040 Cat Z-4042
65c each
(55c each for 10 or more)

EXTENSION CORD REELER


10 metres of extension cord in a handy reeler. Don't be caught short, unless as much cord as you need. Ideal for caravans, too! Cat P-5600
\$12.00

4-WAY POWER BOARD

What a great idea! Double adapters can be dangerous: use one of these 4 way safety shuter outlets on a 2 metre cord for top safety.

\$16.50
Cat P-5610

MINI-DIP SWITCH



8 x SPST switches mounted in a single DIL package. Ideal for circuits where parameters may need alteration. Ideal for PCB mounting. Cat S-1608 \$2.75

ALSO AVAILABLE:
4 pin version of above. But hurry: stocks are limited! Cat S-1604 \$1.85

OMRON DPDT PCB RELAY ONLY \$3.50



Just look at this superb relay bargain: rated at 12V DC with 290 ohm coil resistance; massive 0.4A contact rating. Mounts direct on PCB, ideal for modern circuits requiring a small relay. Cat B-7135 \$3.50

Versatile PC Breadboard

You can use this incredibly handy PCB for circuit mock-ups or complete projects. It will take any of the commonly available IC patterns (even 48 pin) with room for plenty of other components. Size 80 x 127mm. Cat H-5606 \$1.90 ea



Building circuits?

Here's the greatest aid around for the hobbyist, experimenter or designer. It's a Breadboard - rows of connected holes (just poke the component leads in) with a 'front panel' for pots, switches etc. Once you've finished, strip it down for re-use! Cat P-4612



\$2.50

NEW! D-TYPE Connector

Use to connect computers to peripherals. Cat P-2690 \$5.60



(Universal backshell available: Cat P-2692 \$2.60)

POWER SUPPLY ELECTROS AT RIDICULOUS PRICES!

Grab a few of these before they disappear: at these prices, you'd be made not to. 2200 and 3300uF can-type electrolytics bought as manufacturer's excess stock so they lose and you save!

They're great for power supplies (you always wanted to make a high current supply for the linear!) and a host of other projects. Even cheaper 10uF!

Normal price for these is at least \$3.00 each: look at our prices:

2200uF 50 volt: Cat R-4575 40c ea (10 up 30c ea)
3300uF 50 volt: Cat R-4577 60c ea (10 up 50c ea)



4PDT RELAY WITH 12 VOLT COIL:

Normal price for these handy relays would be over \$3.00. We've made a bulk purchase from an Australian manufacturer of excess their excess stock. Brand new, prime spec relays, already with wiring loom attached (but never used). Be quick for this one! Cat R-7005

\$1.00 ea!



WHO WANTS A WHISTLE?

Certainly not you if you are trying to listen to a tuner - and all you are getting is whistles from other stations!

The cure: build a Dick Smith Whistle Filter and install it in your tuner. Easy to build, easy to install, and it effectively removes inter-station whistles.

\$19.75
Cat K-3496

TWENTY TRANSISTORS: \$2.50

We still have a few of our budget transistor packs left: 20 transistors, all brand new, prime spec devices, equivalent to BC107, 108, 157 & 158 - probably the most used transistors in Australia. But if you want a pack you'll have to hurry. (Yes, some packs have been reserved for our mail order customers!)

Cat Z-9012 \$2.50!!

BUYING BY MAIL?

It's so easy! Simply list the items you want, with their catalogue number(s), and post it off with your cheque to our mail order centre (address below). Don't forget to include post and packing (charge is on total value of your order as per the table.)


ORDER VALUE:
\$5 (min) to \$9.99 \$1.00
\$10.00 to \$24.99 \$2.00
\$25.00 to \$49.99 \$3.00
\$50.00 to \$99.99 \$4.00
\$100 or more \$5.50

Note: these charges apply to goods sent by post in Australia only. Large and bulky items cannot be sent by post.

If you prefer, we will despatch your order by Comet Road freight anywhere in Australia for only \$6.00 - that's below what it costs us! Large & bulky items are normally sent by Comet unless you specify differently (eg by rail or air - you pay freight on delivery)

MIC. BRACKET

If you use mics, you'll know how easy it is to lose the mounting brackets. Or the nuisance in transferring mics from stand to stand. The solution: these spare brackets. Fit most mics (spring fit) with standard thread. Handy! Cat K-1264 \$1.95



NEW KITS

(and new kit components)

Remember: parts for most kits in most of the electronic magazines are normal stock lines. So even if a kit isn't listed, we may be able to help you anyway. Call in and ask us!

INFRA-RED REMOTE CONTROLLER (See Oct. EA)
CQY89A Infra-red diodes Cat Z-3235 \$1.50
BPW34 Photo transistors Cat Z-1954 \$3.50
Printed circuit boards (pair) Cat H-8365 \$5.95

DISCO STROBE (similar to ETI September)
Complete kit Cat K-3150 \$29.50
Printed Circuit Board Cat H-8572 \$1.95
Flashtube Cat S-3882 \$2.95
Trigger transformer Cat M-0104 90c
Discharge Capacitors (each) Cat R-2855 \$3.75
Reflector Cat K-6016 \$4.50

WINDSCREEN WIPER DELAY (See September EA)
Printed circuit board Cat H-8364 \$2.50
Other components for this project are normal stock lines

AUTO CHIME (See September EA)
Complete kit Cat K-3502 \$29.75
Printed Circuit Board Cat H-8363 \$3.70
TMS-1000 Integrated Circuit Cat Z-6825 \$16.50

INDUCTION BALANCE METAL DETECTOR (See ETI)
Short form kit (not including former or dowell for rod) Cat K-3100 \$35.50
Printed circuit board only Cat H-8578 \$1.50

PLAYMASTER STEREO EQUALIZER (See May EA)
Complete kit including instructions Cat K-3500 \$99.50
UA4138 Quad Op Amps Cat Z-6105 \$1.95
PC Boards (set of 3 high quality boards) Cat H-8360 \$12.95
Slider pots Cat R-1980 85c
Knobs to suit slider pots Cat H-3782 50c

9kHz WHISTLE FILTER FOR TUNERS (See Feb EA)
Complete kit, including instructions Cat K-3496 \$19.75
(SEE MORE DETAILS ON OPPOSITE SIDE OF THIS PAGE)

INTERSIL LCD EVALUATION KIT (See Feb EA)
(As used in EA digital voltmeter) Cat K-3450 \$39.50
(See bottom of opposite page for more information on this product)

MICROWAVE OVEN LEAKAGE DETECTOR (See July ETI)
Printed Circuit Board Cat H-8619 \$1.95
5082-2800 Schottky Hot Carrier Diode Cat Z-3230 \$2.90
All other components are normal stock lines.

MAJOR DICK SMITH RESELLERS

Listed below are re-sellers who stock a large range of our products. However, we cannot guarantee that they will have all items in stock or at the prices we advertise.

- A&M Electronics**
78 High Street, Wodonga, Vic. Ph 244 588
- Advanced Electronics**
5a The Quadrant, Launceston Tas. Ph 317 075
- Aero Electronics**
123a Bathurst Street, Hobart Tas. Ph 348 232
- Peter Brown Electronics**
9 Doveton Street North, Ballarat Vic. Ph 323 035
- Coastal Electronics**
43 Vulcan Street, Moruya NSW. Ph 742 545
- Crystal TV Rentals Pty Ltd**
66 Crystal Street, Broken Hill NSW. Ph 6897
- Delta Electrix**
67 Queen Street, Ayr, Nth Qld. Ph 831 357
- Elektron 2000**
44 Brown Road, Broadmeadow, Newcastle NSW. Ph 691 222
- Fred R Hayes Electrical**
28 Station Street, Bowral NSW. Ph 611 861
- D & M Harrington**
6/1 Machinery Drive, Tweed Heads South, NSW. Ph 364 589
- Hutchesson's Communications**
5 Elizabeth Street, Mt Gambier SA. Ph 256 404
- Keller Electronics**
218 Adelaide Street, Maryborough, Qld. Ph 214 559
- Lismore Kitronics**
Cnr Magellan St & Brunner Hwy, Lismore NSW. Ph 214 137
- M&W Electronics**
48 McNamara Street, Orange NSW. Ph 626 491
- Power & Sound**
147 Argyle Street, Traralgon, Vic. Ph 743 638
- Stevens Electrical**
135 Goldsmith Street, Mackay, Qld. Ph 511 723
- Summer Electronics**
95 Mitchell Street, Bendigo, Vic. Ph 431 977
- Sound Components**
78 Brisbane Street, Tamworth NSW. Ph 661 363
- Tomorrow's Electronics and Hi Fi**
68 William Street, Gosford NSW. Ph 247 246
- Trilogy Wholesale Electronics**
40 Princes Hwy, Fairy Meadow, Wollongong, NSW. Ph 831 219
- Tropical TV Services**
249 Fulham Rd, Vincent, Townsville Qld. Ph 791 421
- Variety Discounts**
113 Horton Street, Port Macquarie NSW. Ph 835 486
- Wellington Electrical Services**
110 Lee Street, Wellington NSW. Ph 325

BONZA BULK BUY BARGAINS - BEWDY!



POWER SUPPLY ELECTROS AT RIDICULOUS PRICES!

Grab a few of these before they disappear: at these prices, you'd be made not to. 2200 and 3300uF can-type electrolytics bought as manufacturer's excess stock so they lose and you save!

They're great for power supplies (you always wanted to make a high current supply for the linear!) and a host of other projects. Even cheaper 10uF!

Normal price for these is at least \$3.00 each: look at our prices:

2200uF 50 volt: Cat R-4575 40c ea (10 up 30c ea)
3300uF 50 volt: Cat R-4577 60c ea (10 up 50c ea)



4PDT RELAY WITH 12 VOLT COIL:

Normal price for these handy relays would be over \$3.00. We've made a bulk purchase from an Australian manufacturer of excess their excess stock. Brand new, prime spec relays, already with wiring loom attached (but never used). Be quick for this one! Cat R-7005

\$1.00 ea!



DICK SMITH ELECTRONICS

- NSW** 125 York Street, Phone 290 3377
147 Hume Highway, Phone 642 8922
162 Pacific Highway, Phone 439 5311
30 Grosse Street, Phone 683 1133
- SYDNEY** Phone 290 3377
- CHULLORA** Phone 642 8922
- GORE HILL** Phone 439 5311
- PARRAMATTA** Phone 683 1133
- ACT** 96-98 Gladstone Street, Phone 80 4944
399 Lonsdale Street, Phone 67 9834
- VIC** 656 Bridge Road, Phone 428 1614
166 Logan Road, Phone 391 6233
- QLD** SA 203 Wright Street, Phone 212 1962
WA 414 William Street, Phone 328 6944

263 Keira Street, WOLLONGONG Opening soon

EXCEPT WHERE NOTED, ALL ITEMS SHOWN IN STOCK AT PRICES GIVEN AT TIME OF GOING TO PRESS.
MAIL ORDER CENTRE: PO BOX 747, CROWS NEST NSW 2065. Ph 439 5311. PACK & POST EXTRA.

bankcard welcome here

SHOPS OPEN 9AM to 5.30PM (Saturday: 9am till 12 noon)
BRISBANE: Half hour earlier.
ANY TERMS OFFERED ARE TO APPROVED APPLICANTS ONLY
RE-SELLERS OF DICK SMITH PRODUCTS IN MOST AREAS OF AUSTRALIA.



Pioneer 11 proves Australian's theory correct

The solar system was created by supersonic turbulence in an enormous, hot, interstellar cloud of gas according to Australian mathematician, Dr Andrew Prentice, and Pioneer 11's recent flyby of Saturn has apparently confirmed his theory.

He says his theory is confirmed from the startling discovery that Saturn has six rings instead of the five it was believed to have.

This discovery has upturned many theories about the formation of the solar system and the origin of the sun and the planets, and was received with almost complete surprise amongst astronomers and astrophysicists.

It was no surprise to Dr Prentice as he had predicted the existence and position of the ring — inside the existing rings — some years ago.

Dr Prentice has experienced some difficulty in getting his papers on the theory published. The basis of his theory was partially worked out by Pierre de Laplace (remember — Laplace transforms?), a French mathematician, about 200 years ago. In essence, in primeval space enormous plumes of swirling gas, hot

plumes moving one way, cold moving the opposite, would pass each other at speeds of around three to ten km per second. The side-by-side motion of these colliding plumes created supersonic stress in the order of 100 times normal gas pressure. This resulted in incredible turbulence inside the gas cloud. As it cooled, it contracted into a spherical shape, the gas swirl turning faster on its axis. Eventually, centrifugal force caused a bulge around the cloud's equator. As the process accelerated, the bulge became a disc and was eventually thrown off as a gaseous ring.

This event was repeated several times in a mathematical progression until there were several rings and the remainder of the gas cloud had contracted, eventually to form the sun. Each

ring contracted until its components were drawn together by mutual attraction, compacting into a planet.

The theory, according to Dr Prentice, can be applied to the universe generally.

Saturn has special significance as it is still in a gaseous state and provides a test for Prentice's theory. He calculated that Saturn's rings were formed in the manner as just described and predicted the existence and position of a sixth ring — the ring that Pioneer 11 discovered.

Further, Dr Prentice says that the Sun was formed when the central core of the gas body left after the separation of the rings collapsed. Its outer layers fell inwards, triggering the chain of nuclear reactions which make up the sun as we now know it.

Biomedical symposium

"Microelectronics in Rehabilitation" is the title of a Symposium being held in Melbourne from Wednesday 24 October to Friday 26 October.

Venue is Clunies Ross House at Parkville in Melbourne.


The Symposium is being organised by The Institution of Biomedical Engineers (Australia) in conjunction with The National Advisory Council for the Handicapped and The Society for Medical and Biological Engineering (Victoria).

Papers will cover such topics as Microelectronics and Medicine, Implantation, Electrical Stimulation for the Relief of Chronic Pain, Sensory Feedback in a Powered Artificial Hand, A Teachable Robot Arm and many others.

Full registration costs \$75 with sessional and student rates. More information is obtainable from Mr D.A.W. Smith, P.O. Box 5, Parkville Vic 3052.

Intelligent Typewriter

It's a pity there isn't a union for secretaries as the problems of creeping technology are going to affect them as much as anybody else. Any secretarial neo-Luddites out there can all get together and scream about the latest product from the Qyx division of Exxon Enterprises Inc (Zilog's parent company).

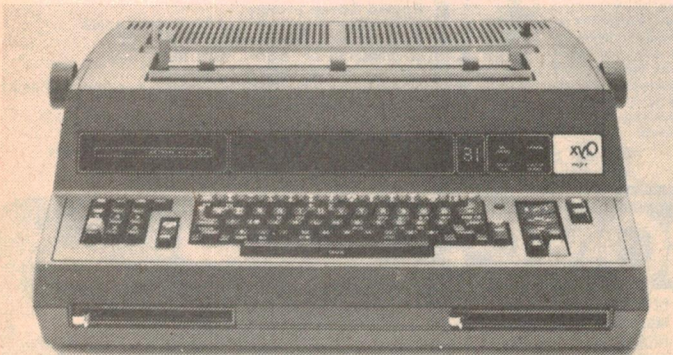


The new Qyx Intelligent Typewriter is available in several different levels, with all levels compatible with the basic unit. Level 1 is a very nice proportional-spacing typewriter with phrase and format recall, centering and self-correction. Level 2 adds a 10 000 character memory and editing features like right margin justification and pagination. Level 3 expands the memory to 60 000 characters and adds some convenience functions, while level four adds a mini-disk drive with 60 K capacity.

Level 5, the top level machine, has dual floppies, and levels 2 through 5 all offer single-line display and communications options.

Obviously, the innards are based on a microprocessor; yes, you've guessed it, a Z-80 (actually there are three micros in the unit). The print mechanism is also largely electronic, based on a stepper motor.

Further information on Qyx is available from Datronics Corporation Ltd., Information Systems Division, 168 Walker St., North Sydney 2060.

By the way, Level 6, which we deduce is still in development, will also answer the phone and tell the caller that you're in a meeting, make coffee (upon insertion of 20c), water the plants and buy you a card on your birthday (cries of 'Shame!', 'Down with technology!', 'The Telecom workers were right!', etc).

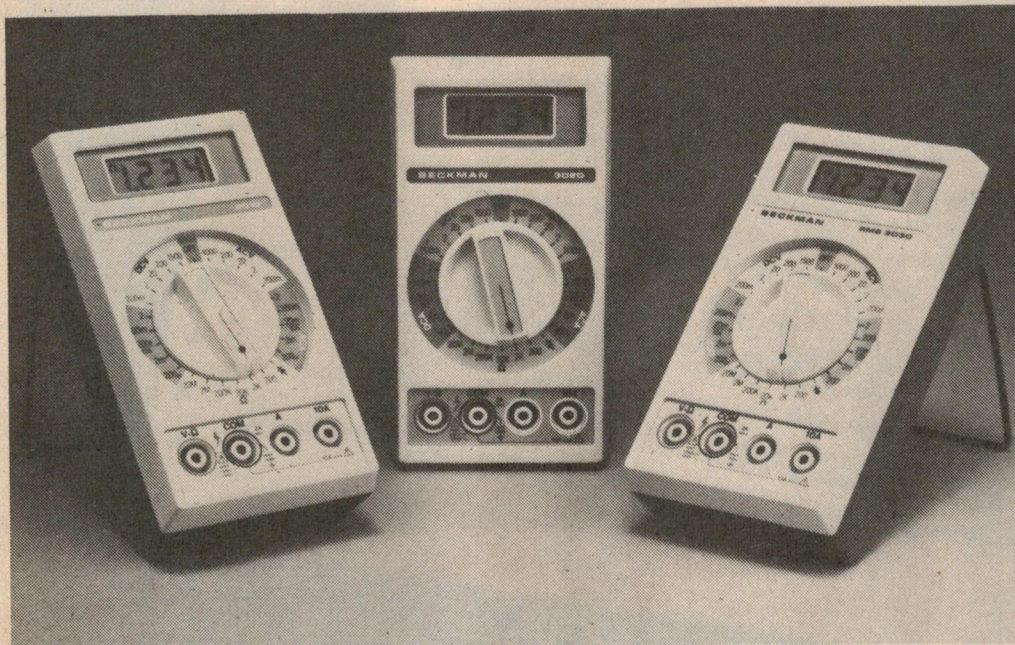

Portable DMMs from Beckman

Warburton Franki recently released a range of three new portable digital multimeters made by the US-based Beckman Instruments.

Each features a 3½ digit display, long battery life, a special in-circuit semiconductor test function and overload protection on all ranges.

An unusual feature on these multimeters is the large rotary function select switch — a favourite on many analogue meters but not seen to date on hand-held DMMs. A unique feature of the display is the omega symbol that appears in the upper left corner when the ohms range is selected. Each has a speedy continuity test function, rivalling that of

analogue VOMs.

Model 3030 includes an RMS measurement capability and Beckman quote a 0.1% accuracy (Vdc). The 3020 is similar, but without the RMS facility. Model 3010 has a claimed 0.25% accuracy (Vdc) and an inexpensive 'TECH' model, the 300, 0.5%.

Recommended prices are, respectively, \$199, \$179, \$139 and \$115, plus 15% sales tax where applicable.

For more information, contact Warburton Franki who have branches in the capital city of each state.

Hex thumbwheel switch

Of interest to the digital enthusiast is a new binary-coded 16 position hexadecimal thumbwheel switch that has recently been added to the C & K product range.

Compatible with the already established range of thumbwheels these hexadecimals are available ex-stock in front and rear mount with a number of options which have

been available over the years for the existing range.

Yet another addition to the range, also ex-stock is a BCD switch with a "separate common to not true bits" ten-position type.

For further information contact C & K Electronics, Office 2, 6 McFarlane Street, Merrylands 2160 NSW (P.O. Box 101, Merrylands); phone (02) 682-3144.

RF measurement agency for Warburton Franki

Warburton Franki were recently appointed Australian distributor for Dielectric Communications (DICOM) RF measurement equipment.

DICOM'S range is quite extensive and includes: Directional RF Wattmeters, antennas, transmission lines, Dry Pak dehydrators, waveguide switches, RF terminating loads, heat exchangers etc.

Substantial stocks of directional RF Wattmeters are already held in several Warburton Franki centres. Service and engineering support is offered Australia-wide.

MIDAS — a data goldmine!

The Overseas Telecommunications Commission has launched a new international data transmission service called MIDAS (Multimode International Data Acquisition Service).

The service will provide Australian MIDAS subscribers with access to databases and computer installations initially in the USA. Other countries will join the network later.

MIDAS will have particular application to industrial, educational, research and library organisations and it will be extended to meet the needs of corporations utilising their own internationally distributed database and computer processing facilities.

A spokesman for OTC said: "In the past two years, while negotiations and tendering action aimed at establishing this service were proceeding, thorough market testing and widespread demonstration to interested groups has been carried out by OTC. This has shown conclusively that there is

a significant demand for the MIDAS-type service in Australia and, with MIDAS' carefully devised and economical tariff, widespread and fast growing usage is foreseen."

The MIDAS switch will be located in OTC's International Gateway Centre in Sydney. It will be connected by satellite and submarine cable circuits through OTC's correspondents in the USA to the Tymnet network, which in turn provides access to the many database and computing services spread throughout the USA.

Other countries are providing similar packet switch interconnection to the USA, and extension of MIDAS service to these countries (e.g. UK, Europe, Japan, Canada and Hong Kong) is foreseen at a later date as the service develops.

PET: HAVE YOU BLOKES SEEN THE NEW ANADEX NIGEL'S BEEN RAVING ABOUT?

APPLE: YOU MEAN THAT BEAUT 'GOT IT ALL BUT FOR HALF THE PRICE' DP-8000 THAT RUDI CAN'T GET ENOUGH OF?

SORCERER: ISN'T THAT THE 80 COLUMN LINE PRINTER WITH HIGH RELIABILITY AND FAST THRU PUT THAT DICK CALLS THE X1188 AND WE CAN ALL TALK TO FOR AROUND \$1200 ?

PET: RIGHT- BUT HE HAS HEARD OF A NEW MARK II VERSION.

BRAND X: YOU MEAN THEY'VE PAINTED IT RED AND DOUBLED THE PRICE !

COMPUTER JOURNAL: **STEADY ON!** BELL & HOWELL HAVE TOLD ME THAT THE MARK II PRICE WILL BE UNCHANGED, IT WILL NOW FEATURE A NEW HIGH STABILITY PRINT MECHANISM, INCREASED BUFFER CAPACITY TO 1K (ADDITIONAL 2K OPTIONAL), INTEGRAL TEST DIAGNOSTICS FACILITY AND ADJUSTABLE SPROCKETS FOR VARIOUS PAPER SIZES:-

ALL: LOOK'S LIKE I'LL ENJOY TALKING EVEN MORE WITH ANADEX.

BRAND Y: HEY I'M A SMALL BUSINESS COMPUTER TOO AND I'D LIKE TO GET A PIECE OF THIS ACTION.

COMPUTER JOURNAL: WELL CONTACT BELL & HOWELL OR THEIR AUTHORISED DISTRIBUTORS FOR SALES & SERVICE AUSTRALIA WIDE!

ADAPTABOX

INSTRUMENT CASES BY **AE ADAPTIVE**
ELECTRONICS P/L

A RANGE OF CABINETS TO GIVE A PROFESSIONAL APPEARANCE TO THAT SPECIAL PIECE OF EQUIPMENT YOU ARE BUILDING!


The standard cabinet is supplied in kit form and consists of:

- (a) Satin anodised 1.6 mm aluminium front and back panel, with surfaces suitable for screen printing etc.
- (b) Top and bottom panels of hard-wearing black "MARVIPLATE" with a 1.0 mm steel base.
- (c) Side panels of satin anodised aluminium timber.
- (d) Provision for mounting a metal chassis, circuit boards or edge connectors.

Cases are suitable for mounting PCBs, Transformers, etc.
***CAN ALSO BE RACK MOUNTED**
13 Standard sizes ranging from 89 x 178 x 178 mm (\$16.34) to 267 x 483 x 280 mm (\$49.70).



SPECIAL SIZES AVAILABLE.
*For 10 units or more

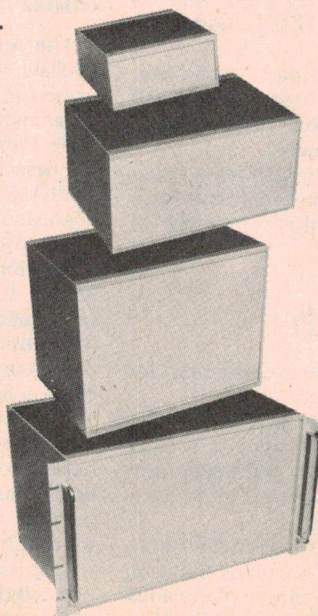

For further details and prices contact our distributors:

Ellistronics, 289 Latrobe Street, Melbourne 3000
(Tel: 602-3282).

Stewart Electronics, 33 Sunhill Road,
Mt Waverley, Victoria 3149. (Tel: 277-0622).

Rogers Electronics, 44 Heather Drive, Para Vista,
South Australia 5096. (Tel: 42-6666).

AE ADAPTIVE
ELECTRONICS P/L

77 BEACH ROAD, SANDRINGHAM,
VICTORIA, AUSTRALIA 3191.
TELEPHONE (03) 598-4422
TELEX 35666

Inter-satellite links


The International Telecommunications Satellite Organisation (INTELSAT) recently announced plans for the development and establishment of inter-satellite communications links within its system.

INTELSAT has awarded a contract to the Electron Dynamics Division of the Hughes Aircraft Company in California for the design, fabrication and testing of a feasibility model of a travelling wave tube (TWT), a vital component of the on-board satellite equipment required to operate an inter-satellite link.

Other work is under way or planned, covering the development of a prototype model and other associated equipment.

INTELSAT's objective is to advance technology in this area sufficiently to enable it to install facilities for inter-satellite links on its satellites launched after 1984.

Inter-satellite links offer a number of significant advantages: at present, direct satellite transmission can only be provided between points within a single satellite coverage area — about one third of the earth's surface.

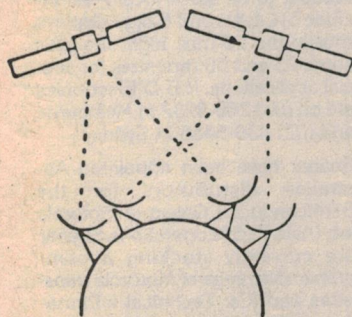

A: current arrangement


Communications bound for destinations outside the coverage area must complete their journey via land-based links or through a second satellite hop.

With inter-satellite links these signals could be switched directly from the first satellite to the second — thus saving one "down-" and one "up-link" transmission, freeing this capacity for other communications and allowing more efficient and economical use of the system as a whole.

It will enable one earth station to communicate through more than one satellite in each area thus improving system flexibility by increasing the number of receive stations which can be accessed directly.

Inter-satellite links also promise some potential for linking satellites in different coverage zones so cutting the distance travelled by signals and therefore the time taken to reach their destinations. This could be particularly important for telephone calls and for some types of data transmission.

Existing satellite communications is from one station to another via the satellite, as shown in A. An inter-satellite link can provide extra coverage economically as shown in B. Eventually, both inter-satellite and inter-station links will permit greater coverage and reduce the distance travelled by signals.

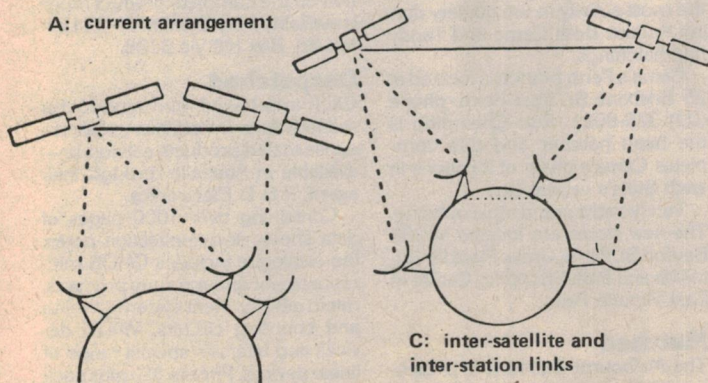

B: inter-satellite link

C: inter-satellite and inter-station links

Video disk has huge capacity

A prototype digital video disk system with a staggering 20,000 million bit capacity has been developed by the US firm Magiec, a Philips subsidiary.

The system uses a helium-neon laser to burn micron-sized holes in a layer of tellurium, which it immediately reads back to check that there are no errors.

The breakthrough was made possible by enclosing the recording layer between two inexpensive plastic discs. This procedure keeps the dust off the tellurium and allows the disk to be handled by human operators. The laser burns a conventional style label on the disk automatically.


As the data, once written, cannot be erased the system merely rewrites an entire sector

every time it is up-dated. This sort of redundancy is only feasible with such a low-cost medium.

The developers suggest that the final high-volume cost of the unit will be around US \$10,000, with disks costing US \$150.

As the need for high-density data storage increases (the Bank of America needs some 600 billion bits per year), Magiec (North American Philips' Magnavox Government and Industrial Electronics Co.) predict the need for a 1000 billion bit system by 1980.

High stall torque, low cogging for new dc motor

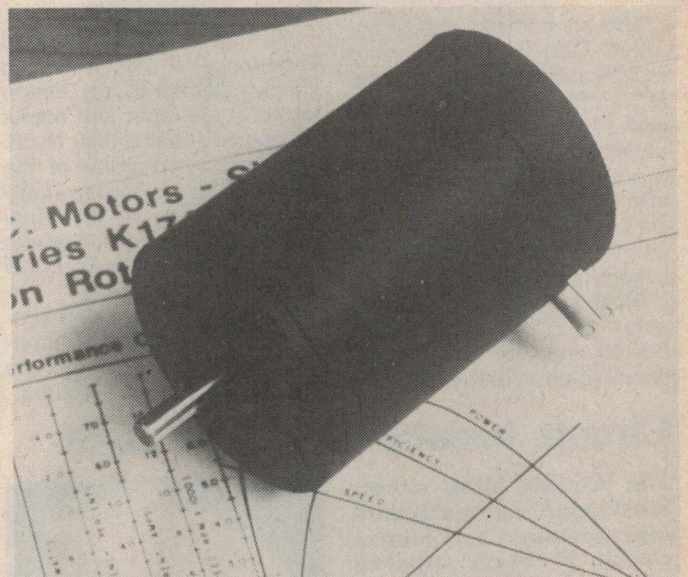


Featuring a stall torque of 110 mNm for a 24 V model, the new motor from Airpax is designed for speed control and servo applications.

Designated model K17400, it is an iron core bi-directional type having a stainless steel shaft. Bearings are permanently lubricated self-aligning sintered bronze. It offers a linear torque speed characteristic with low cogging.

The K17400 is available for

either 6, 12 or 24 Vdc operation and is suited to tape drive, pen and chart drive, printer ribbon and carriage drive applications.

Distributed by Philips Electronics Components and Materials, further information is available from P.O. Box 50, Lane Cove 2066.

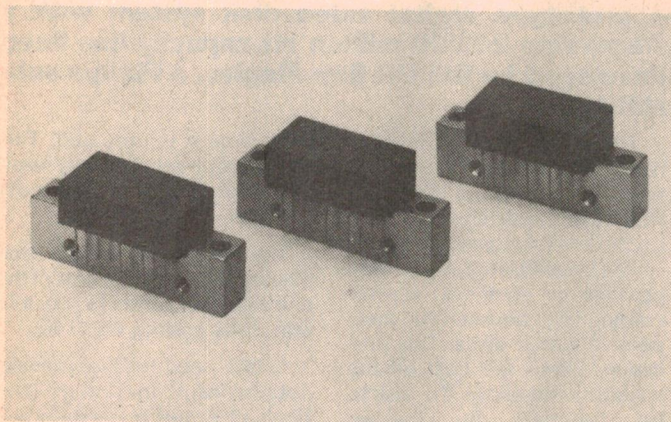

Amplifier modules

Six new VHF hybrid push-pull amplifier modules for cable TV systems, covering the full frequency range from 40 to 300 MHz, were released recently by Philips.

There are two kinds listed: preamplifiers and final amplifiers, both of which are available in three gain versions.

The preamplifiers are designated BGY50, BGY52 and BGY54 and feature power gains at 50 MHz of 12.5 dB, 16.4 dB and 17 dB respectively. Their output voltage at -60 dB intermodulation is around 460 dBmV. The second harmonic distortion is less than -68 dB and the noise figure is quoted better than 6 dB.

Final amplifiers are designated BGY51, BGY53 and BGY55 and also have similar power gains to the preamp

modules. Output voltage at -60 dB intermodulation is around 63 dBmV, and the second harmonic distortion is better than -70 dB. Noise figure is better than 7 dB, Philips claim.

All have a source and load impedance of 75 ohms and supply voltage is 24 Vdc. Return losses at the input and output are quoted as better than 18 dB. Current consumption of the preamplifiers is typically 160 mA, and of the final amplifiers 200 mA. All modules are encapsulated in a SOT-115 package.


For further information contact Philips Electronic Components and Materials, 67 Mars Road, Lane Cove, NSW 2066.

Circuit breaker replaces fuse

The 'Circuit Alert' circuit breaker replaces a standard fuse, operating as a normal circuit breaker, tripping when a predetermined overload occurs.

The unit is made as a direct replacement for standard house fuses and has been tested and approved by the NSW Electricity Authority.

The device is available in ratings of 30, 25, 20, 15 and 8 amps to suit Standard A, Wilco and Federal fuse types. Price is \$8.95 each. They are available from Dindy Marketing (Aust.) Pty Ltd, P.O. Box 55, Rushcutters Bay, 2011 NSW.

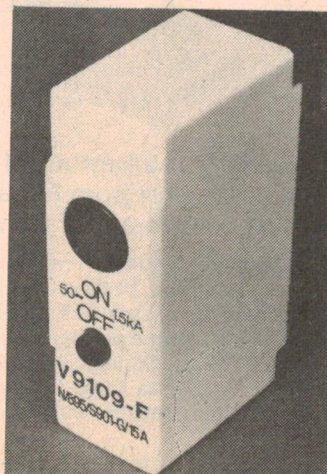

Position vacant on new publication

Electronics Today Int. is about to produce a new regular publication covering all aspects of electronics in sound and sound recording.

The field, which is much wider than it might at first seem, includes electronic musical instruments, electronics in musical instruments (that's two different things — not a printing error); sound recording including studio and broadcasting audio equipment; public address systems, stage lighting etc etc.

The first publication will be a 200 plus page year book and will be on-sale about the end of November.

We are now seeking a freelance or part-time editorial person to take over from the present incumbent (ex-Radio Birdman drummer, librarian and electronics nut Ron Keeley)

who for some totally unfathomable reason is emigrating to the UK.

An essential qualification is a practical working knowledge of the hardware — gained either as a roadie, or as a professional or semi-professional rock musician etc. He/she should also have a journalistic background or at least basic writing talent. A practical knowledge of electronics would be useful but not essential.

Interested — or know anyone who is? Ring Collyn Rivers on (02) 33-4282 or write to us at Electronics Today Int., 15 Boundary St, Rushcutters Bay, NSW, 2011.

Hatched, matched, despatched

Brief news on company activities, new outlets, mergers, joint ventures and closures.

Hatched

Cema Electronics have opened a second Silicon Valley retail store in Melbourne (ah ha!, the weather's warming up ... Ed.)

Located at 208 Whitehorse Rd Blackburn, the new outlet will serve the eastern area of Melbourne and will carry the range of semiconductors from Motorola, Texas, Hewlett-Packard, Philips, Signetics and others that all Silicon Valley stores stock. Philips' passive components will be available in small quantities (!! ... Ed.)

Perth gets the gong this month for the most activity in the nursery during August. Both Cema and Tandy had hatchings.

Cema's Perth branch is located at 25 Brisbane St, East Perth, phone (09) 328-8091. Rod Champion is the head hatcher and this completes Cema's chain of locations in each State's capital city.

Tandy had a grand triple opening. The new stores are located at 208 Beaufort St, Perth, Grove Plaza in Cottesloe and Park Shopping Centre in East Victoria Park.

Matched

The Melbourne-based R & D Electronics has been appointed sole Australian agents for the Ladcov range

of Liquid crystal displays (LCDs). Product to be stock locally will include 3½, 4, 4½ and 6 digit displays, mostly the 13 mm high size plus some 25 and 50 mm sizes for special applications. R & D Electronics are on (03) 288-8232 in Melbourne and (02) 439-5488 in Sydney.

Soanar have been appointed Australian distributors for the Semiconductor Group of Motorola Inc. (Asia-Pacific operation). Soanar are currently stocking a comprehensive range of Motorola transistors and ICs. Technical information on the complete product range is available from them at 30-32 Lexington Rd, Box Hill Vic 3128.

Despatched





California-based semiconductor manufacturer Intersil has released a consolidated products catalogue — available in Australia through their agent, R & D Electronics.

Containing over 1000 pages of data sheets and application notes, the catalogue includes CMOS microprocessor and memory products, micro development systems, timing and counting circuits, VMOS devices and Intersil's special range of linear devices. Price is \$10 plus pack and post, limit of one per customer ... fair's, fair fellas.

SERVICE TECHNICIANS!

Specialised Soldering Tools from...

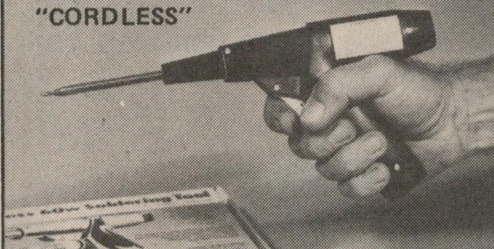SCOPE

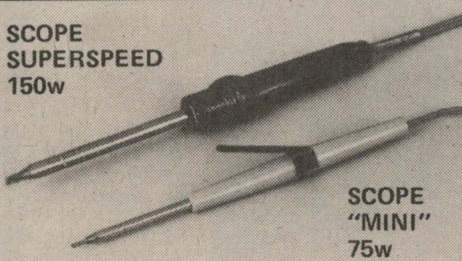SERVICE SITUATION	TAKE THIS TOOL	GET THIS USER ADVANTAGE
<ul style="list-style-type: none"> ● No power ● No time to get power ● Must work on live gear 	<p>SCOPE "CORDLESS"</p> 	<ol style="list-style-type: none"> 1. 40-200 Terminations depending on conductor size. 2. Recharges overnight. 3. Heats in 6 seconds. 4. 60 watts - Controllable temperature.
<ul style="list-style-type: none"> ● 12 volt. Battery power available only. ● Outdoor and bad weather expected. ● Service vehicle can get within 6 metres. 	 <p>SCOPE "12VOLT SUPERSPEED"</p>	<ol style="list-style-type: none"> 1. 5 Second heating. 2. 200 watts if needed. 3. Controllable temperature. 4. You can replace tip or element anywhere in minutes.
<ul style="list-style-type: none"> ● Modern sophisticated PCB equipment. ● Accurate & automatic temp. control wanted. ● Components are heat critical. 	<p>SCOPE "TC60"</p> 	<ol style="list-style-type: none"> 1. Heats in 45 seconds. 2. Dial any temp. 200°-400° 3. Plugs direct to mains. No transformer needed. 4. Accept iron plated tips from 0.8mm to 6.4mm.
<ul style="list-style-type: none"> ● Unpredictable soldering situation. ● Maybe electrical or electronic or mechanical. ● You can't come back to base for a bigger or smaller iron. 	<p>SCOPE SUPERSPEED 150w</p>  <p>SCOPE "MINI" 75w</p>	<ol style="list-style-type: none"> 1. 5 second heat up. 2. Controllable temperature. 3. Reserve heat for any normal job. 4. 4 volt safety in the hand.

Available from your normal trade suppliers in Australia and New Zealand.



SCOPE LABORATORIES

Box 63 Niddrie Vic., 3042.
Phone: (03) 338 1566. TLX 34382.

Spacelab — a giant international venture

Brian Dance

A re-usable orbital vehicle, Spacelab is being readied for its first flight, scheduled for mid-1981. The first mission will carry 76 scientific and technological experiments from European, American and Japanese agencies. The results are likely to have a profound effect on the development of science and technology into the next century. It has been said that the Spacelab missions are a greater step for mankind than man landing on the moon.

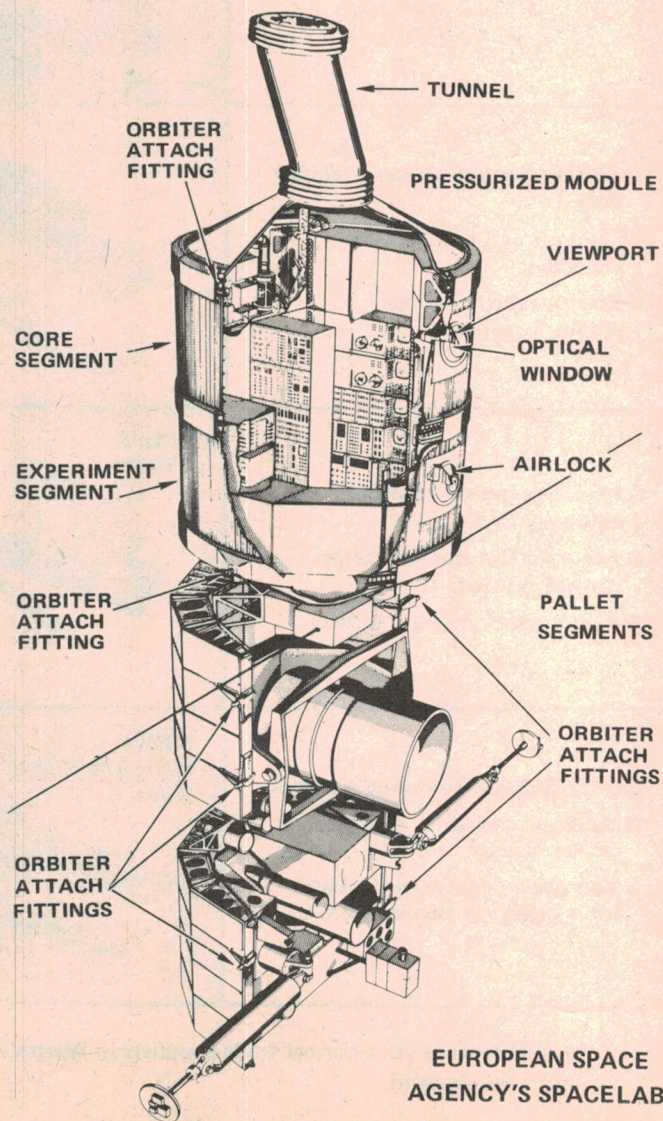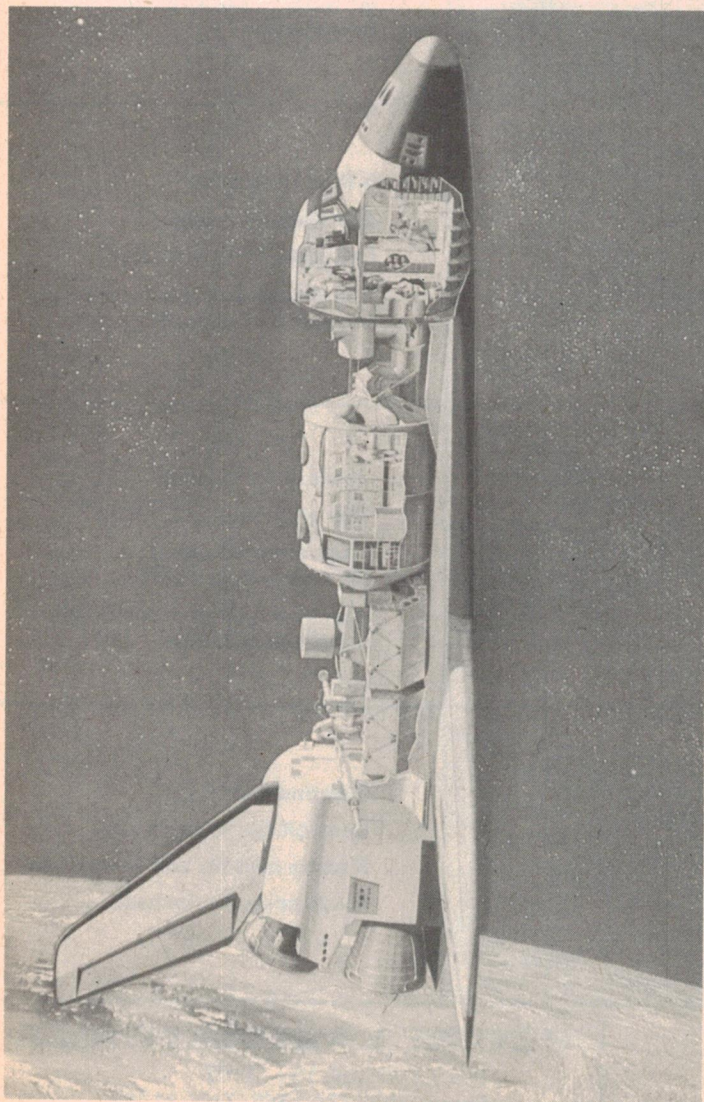

DURING the past twenty two years quite a number of highly trained astronauts have been rocketed into orbit, carrying out much pioneering research in gravity-free environments.

These astronauts have to be able to withstand accelerations of up to about ten times that due to gravity on the earth's surface.

However, the US Space Shuttle should become available reasonably soon. It will not only allow people and other payloads to be lifted into orbit much more economically, but the maximum acceleration of a Shuttle launch is only about three times that of the earth's gravity (3g) and that of a shuttle landing about 1.5 g.

It is therefore logical that the Shuttle should be used to launch a manned space laboratory, known as Spacelab, in which scientists, engineers and technicians rather than astronauts will be able to conduct experiments in earth orbit.

No long and rigorous pre-flight training courses are envisaged for the Spacelab crew. Those men and women who fly in Spacelab should be in good health, but their training will be short, and will include experiment operation briefings on flight plans and procedures, familiarisation with zero gravity conditions, exercises in spaceflight "house-keeping" and emergencies, and total system simulation.

Spacelab, like the Space Shuttle, will be re-usable — probably about fifty times. The Shuttle Orbiter vehicle, with Spacelab in its cargo bay, will be boosted into earth orbit by two solid fuel booster rockets (jettisoned at a height of 69 km) and by the main engines of the Shuttle vehicle which obtain their fuel from a huge external fuel tank which is jettisoned just before the orbital altitude is attained.

The Shuttle and Spacelab, will orbit for up to twelve days, although this may be extended up to thirty days in later flights.

The nominal duration of a typical mission is seven days. Although the Shuttle is a space vehicle, it is unique in that it can land like an aeroplane and will return Spacelab to earth.

A team of up to four experimental operators (women as well as men) will be able to work in Spacelab in orbit. They will be able to make adjustments to the orbiting equipment and to control the measurements being made.

On their return to earth they will bring the acquired data back with them.

The Spacelab crew will eat and sleep in the cabin of the Orbiter Shuttle vehicle with the four astronauts who form the Shuttle crew, but they will be able to move through a connecting

tunnel into Skylab when necessary.

The first Spacelab mission is scheduled for about the middle of 1981.

Spacelab is being constructed for the European Space Agency by an industrial team of nearly 40 manufacturers in 10 European countries, the leading contractor being VFW-Fokker/ERNO of Bremen, Germany.

Detailed design and development work on Spacelab began in June 1974. A Memorandum of Understanding was signed by the European Space Agency and the US National Aeronautics and Space Administration (NASA) in August 1973 which provides for the delivery to NASA (who will be responsible for the launching) of one Spacelab engineering model and one flight unit.

NASA has undertaken to buy more Spacelabs from the European Space Agency, subject to certain conditions. The engineering model is scheduled for delivery in the second half of 1979 and the first flight unit proper about a year later.

Earlier spaceships

The early astronauts had to be content with very uncomfortable living quarters in spacecraft designed to ensure survival rather than to transport a large amount of equipment into orbit.

The Russian Salyut 1 was perhaps the first orbiting laboratory designed to carry many instruments into orbit, the role of the crew being to ensure their satisfactory operation.

This satellite was 14 m long with a maximum diameter of 4 m. The internal volume of nearly 100 cubic metres included about 36 cubic metres for the crew. They could sleep in beds, enjoy a dining room with a kitchen corner with reheated dishes, and had a bathroom and toilet room.

Later Salyut spaceships were of the same general design, very like that of a submarine; this is not surprising, since in both spaceship and submarine there is a great pressure difference between inside and outside the ship.

In 1973 NASA launched the Skylab orbital and scientific space station, this being an extension of the Mercury-Gemini-Apollo programs.

The internal volume of Skylab is about 600 cubic metres, of which about 100 cubic metres are inhabitable.

Salyut and Skylab were launched unmanned, since if the rocket were to explode, the station would be destroyed. Neither can they be brought safely back to earth, since they could not withstand the mechanical and thermal strains of re-entry.

The crew of these stations therefore had to travel separately to and from the vehicle. Salyut had an engine, but

Skylab had no engine of its own, although it could use the Apollo ship to which it was coupled as a locomotive. A main disadvantage of both of these craft is that almost all the equipment on board is lost except for a few small rather precious items which the astronauts can bring back to earth with them.

The space available in the vehicles used for transporting men to and from the space station is very limited; the astronauts in Soyuz II returning from the Salyut I station died because they were so encumbered with the equipment they were bringing back to earth that they could not move to reach a device to stop the accidental depressurisation of the craft. Such problems will not occur in this form with the future Spacelabs.

Neither should Spacelab vehicles cause danger to people on the earth. After the fiery death of Cosmos 954, the nuclear reactor equipped Russian satellite which crashed in northern Canada in January 1978, people are becoming wary of space equipment which may crash down on to their country even if there are no radiation dangers involved.

NASA is concerned both about the possible hazards of such craft striking a populated region and also about losing its investment in the station, which cost about US\$2000 million.

Spacelab modules

The Spacelab station has been designed on a modular basis so that it can be changed to meet specific mission requirements. The two main components are a pressurised module or laboratory which provides a "shirtsleeve" working environment and an open pallet in which materials and equipment can be directly exposed to the space environment.

The pressurised module is made in two segments, each being a cylinder 4.1 m in diameter and 2.7 m long. The core segment will be used in all Spacelab missions in which a pressurised module is required; it contains various supporting facilities (such as data processing equipment) and laboratory facilities such as working benches, floor-mounted racks, etc.

The second pressurised module, known as the experiment segment, is used to provide more laboratory working space. It will not be used unless this additional space is required. This segment contains only floor-mounted racks and benches.

When both segments are assembled with their end cones, the maximum external length is seven metres.

Five pallet segments, each three metres long are also available. These are designed for large instruments, for ex- ▶

periments requiring direct exposure to the space environment and for work requiring unobstructed or broad fields of view.

For example, various telescopes, antennae, sensors, radiometers and radar antennae will be carried in one of the pallets. Each pallet can also be used to cool equipment, to provide electrical power and to furnish connections for commanding and acquiring data from experiments.

If the pallets only are used without any pressurised module, the essential

support systems for various experiments, including power and communication systems, are protected in a small pressurised and temperature-controlled housing called an igloo.

The pressurised cabin of the Orbiter Shuttle vehicle is connected by a tunnel with the pressurised module of Spacelab. The tunnel is segmented so that its length can be changed as required. An airlock module can be attached to the tunnel to provide an additional access to external space.

Pallet-mounted instruments will

normally be powered and controlled from within the pressurised module, but could be controlled from the Orbiter Shuttle vehicle cabin when the flight is a "pallet-only" mode with no pressurised module. The pallet can accommodate a variety of experiments in which manned attendance is unnecessary, but where services such as electrical power, temperature control, etc. are needed.

Several kilowatts, both AC and DC will be available to operate experimental equipment during a Spacelab mission. Continuous voice and data transmission

Atmospheric physics

The first Spacelab flight will be in the relatively low circular orbit of 250 km \pm 5 km altitude with an inclination of 57° favourable for experiments in atmospheric physics. It is expected that important new results about the physics of the atmosphere will be obtained during this flight in which various groups from the USA, France and Belgium are involved.

The University of Michigan Group will be responsible for an imaging spectrometric observatory which will simultaneously observe the 20 nm to 1200 nm wavelength region with a resolution varying between 0.3 nm and 0.6 nm over the spectral range. This permits the study of the airglow spectrum by observing radiation emitted by excited atomic and molecular ions and also neutral particles in the atmosphere.

The Jet Propulsion Laboratory of California are working on an ATMOS (Atmospheric Trace Molecules Observed by Spectroscopy) project using interferometry. Groups from France and Belgium are planning a Grille spectrometer for the high resolution passed through the atmosphere at sunrise and sunset.

French and Belgian groups will also study Lyman-Alpha emission by hydrogen and deuterium in the atmosphere.

Plasma Physics

Plasma physics experiments for the first Spacelab flight have been designed by groups in Japan, the USA, France, Norway, Germany and Austria. Although magnetospheric research is one of the earliest fields of space research, Spacelab offers a new dimension for such work, since on-board particle accelerators can be used to investigate the electric fields parallel to the magnetic field lines; gas plumes, optical and electron detectors and, on later Spacelab flights, small satellites can be employed.

Artificial auroras produced by particle accelerators on board will be observed by a low light television system, whilst natural auroras and the small partial contamination around the Orbiter will be observable.

The latter is an important parameter for the success of the astronomical observations from Spacelab. A similar system for the detection of low-energy electrons can detect the natural electron flux and fluxes induced by the particle accelerators.

Sun-earth relations

Various groups of European and US workers are preparing equipment which will provide data about the influence of the sun on our daily weather. For example, Figure 1 shows that there is a very strong correlation between the 22 year sunspot

cycle and the July temperature in central England, but much more information is required about the energy input from the sun to the earth.

Two absolute solar radiometers on the first Spacelab mission will measure the total energy flux from the sun over the whole spectrum from the far ultra-violet to the far infra-red. It is hoped to achieve an accuracy of 0.1%, which is why two instruments making the same measurements are to be used on the same flight.

A further instrument will measure each part of the solar spectrum over the range 190 to 4000 nm; three precision monochromators will achieve a relative accuracy of 0.1% and will permit the identification of the particular spectral elements responsible for any changes in the amount of energy reaching the earth.

This work is regarded as the first of three flights spread over a period of about ten years so that long term changes in the solar energy input can be studied.

Astrophysics

The Far Ultraviolet Space Telescope (FAUST) has been designed for the observation of extended and point sources in the 120 nm to 300 nm wavelength range, flown on previous rocket flights. It can be used for objects down to magnitude 18.

Another instrument is the wide field camera which will form images of a large fraction of the sky to assist in the study of large scale phenomena in the Universe. A 60° angle will be used with filters for 130 – 300 nm for stars down to the 11th magnitude. This camera will be used for investigations of the milky way, nebulae, dark clouds and the distribution of galactic and extra-galactic matter.

Another piece of equipment will involve the use of a gas-scintillation-proportional

counter for X-ray spectroscopy. This will be the first time this type of detector will be used in orbit.

Materials sciences

Quite a number of materials science experiments will be carried by Spacelab on its first mission; they have been designed to test the capability of the system for producing desired results in conditions of virtually zero gravity rather than to produce materials in commercial quantities.

A tribology experiment will test the characteristics of lubricants for bearings under zero gravity (such as their spreading, wetting and operating characteristics). A geophysical flow experiment will permit laboratory studies of the dynamics of the oceans and atmospheres of rotating planets and stars; a dielectric fluid will be employed between concentric rotating conductive spherical shells with an electric field between them to generate a gravity-like force in the miniature model. This work is impossible in a ground based laboratory.

There will be a total of 37 materials science experiments in the first Spacelab payload. The equipment will include three furnaces and a fluid physics module.

Earth observations

Two instruments to be carried aboard the first Spacelab flight are designed to test its capability of performing earth-surface remote sensing work. The metric camera will be attached to the optical window of Spacelab to produce small-scale high-resolution photographs of the surface of the earth from space and to test the capability of making maps and revising maps from such photographs at scales of 1:50000 or smaller. The camera is similar to that used on aeroplanes.

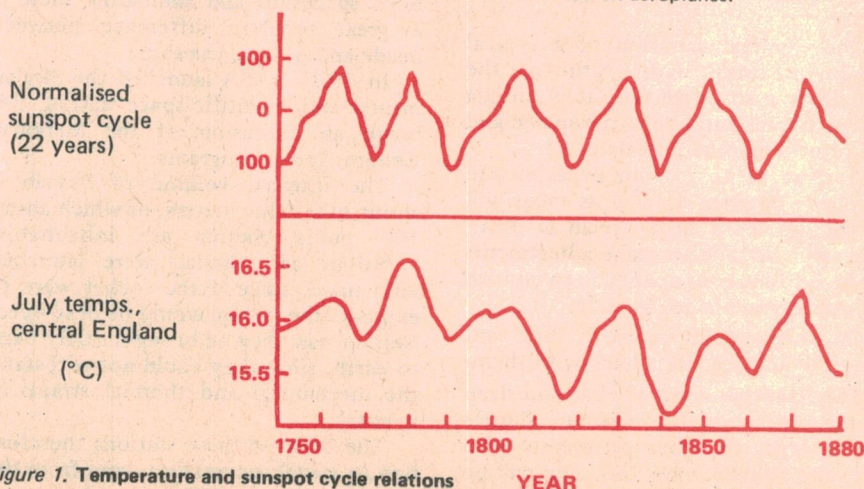


Figure 1. Temperature and sunspot cycle relations

facilities will normally be made available between the experimenters in Spacelab and the ground observers so that the experimenters can obtain expert advice rapidly.

The relationship between Spacelab and the Shuttle has been compared with that between trailers and tractors.

A number of Spacelabs are in various states of preparation for their voyages, but relatively few Shuttle Orbiter vehicles are required, since the turnaround time of the Orbiter vehicles is quite short.

The microwave facility is rather remarkable in that it measures the long wave energy spectrum of the ocean waves as a function of wave number and direction. The long wave region of the ocean spectrum (taken as the 10 to 500 metre section) contains the largest part of the wind-induced surface wave energy. The global distribution of these waves is closely related to the global wind fields and to the atmospheric pressure distribution at sea level. It is intended that this technique will be used from future satellites to help improve weather forecasting.

This microwave facility, which employs a 2 metre by 1 metre antenna, can also be used as a synthetic aperture radar from orbital altitudes. This technique makes it possible to use the craft's velocity for scanning the spatial electromagnetic field near the craft created by backscattering from the surface of the earth. The data obtained should provide an all-weather day and night time surface mapping of the earth with high spatial resolution by a process which is the microwave analogue of optical holography.

Life Sciences

The Spacelab environment enables experiments to be performed on the behaviour of man and other organisms in a gravity-free environment, whilst the effects of high energy cosmic particles from space can also be investigated. In the life sciences field 16 experiments have been accepted for Spacelab's first flight.

Blood samples will be taken from the crew members at regular intervals during the concentrations after the flight. Other work will investigate how the body fluid pressures react to near zero gravity, whilst further experiments will investigate any changes in the numbers of cells in the blood and whether the cells which provide our immune responses are altered.

During their growth plants exhibit helical movements and an experiment with *Helianthus annuus* will test how this is affected by gravity. Other work will look into the effect produced by the absence of the normal daily variation of light and darkness on a fungus which produces patches of extensive growth once every 24 hours; this may shed light on the 'biological clock' mechanism.

Ballistocardiography experiments will record the body accelerations in three dimensions of the crew by attaching accelerometers and the effect on the heart activity and blood movement will be found. The crew members will be equipped with personal miniature tape recorders to monitor their electrocardiograms, electroencephalograms, etc. under gravity free conditions. They will also wear various radiation dosimeters.

Maximum use can be made of the Shuttle Orbiter vehicles, while the Spacelabs can be outfitted at the user's premises. But in most cases, the individual experiments will be brought to a central location and integrated into one of the Spacelabs.

Flexibility

The Spacelab missions offer flexibility. The Shuttle Orbiter flight parameters can be varied so that the orbit inclination and the orbit altitude meet the requirements of the particular mission concerned. For example, the altitude of the orbit can be varied between 200 km and 900 km.

The Kennedy Space Centre on the East coast USA will be used during the first few years of operation of the Shuttle, providing a possible range of inclinations of 28.5° to 57°.

Later the Vandenberg site on the West coast will become available and this will make orbital inclinations of up to 104° possible.

The orientation of the Orbiter vehicle can be adjusted as can the flight time. For example, the Orbiter may fly inverted to give a view of the earth.


Mission flexibility is also provided by the choice of various module-pallet configurations — such as module only, module plus pallet or pallet only — and variations of the module and pallet lengths.

In general only equipment required for a particular mission is carried so as to reduce the weight. Up to five pallets may be flown on the Orbiter.

The Spacelab can carry greatly increased weight and volume compared with other space transportation systems, and at relatively low cost. The cargo bay of the Shuttle Orbiter vehicle is 4.5 metres in diameter by 18 metres long.

The ability to carry experts in their field with the experimental apparatus so that they can immediately make adjustments will maximise the usefulness of the results obtained. The return of the complete Spacelab equipment to the ground after every mission is also

Work on the pressure module in Bremen, Germany. (Courtesy: ESA, Paris).

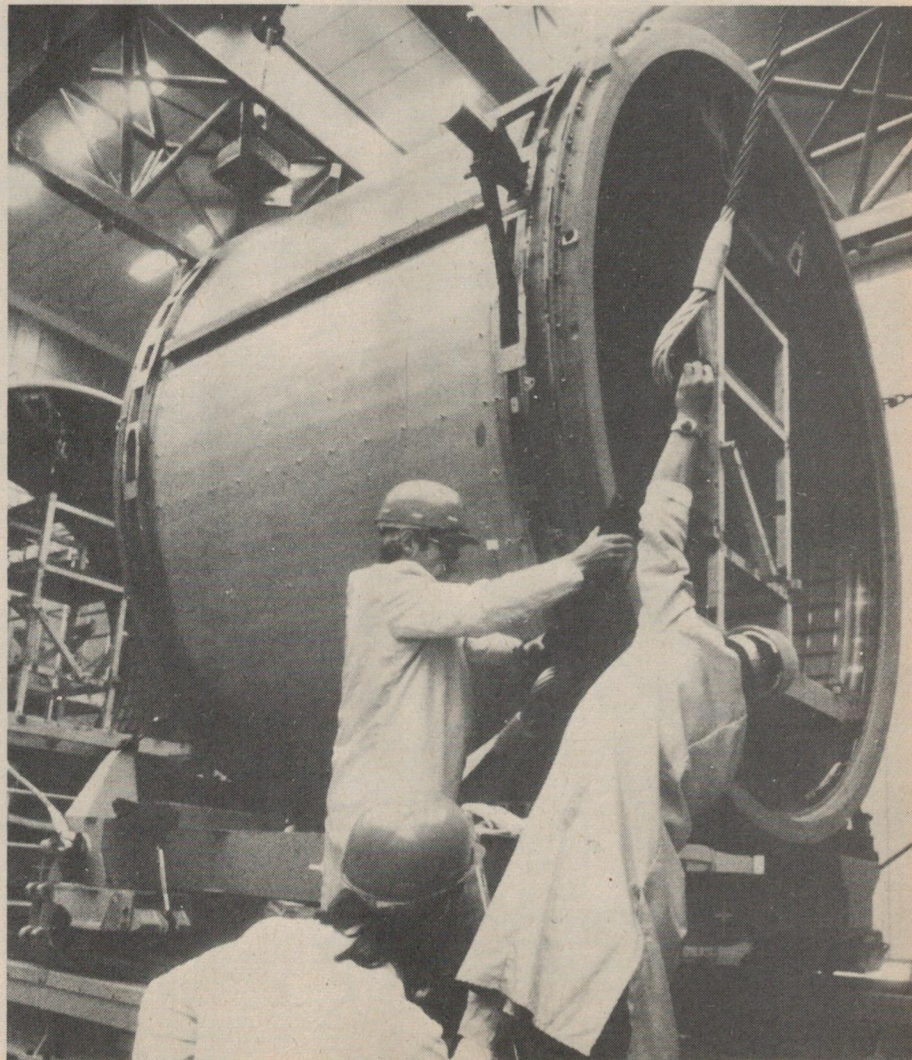

very attractive and economical.

Shared mission costs also keep expenditure down, but there are some types of work for which the Spacelab system is not ideal — such as work requiring more time in space than the Shuttle Orbiter is designed to spend.

Overview

The cost of Spacelab is about US\$500 million, provided by ten European countries — Italy, France, West Germany, the United Kingdom, Belgium, Spain, The Netherlands, Denmark, Switzerland and Austria.

NASA provides the launching facilities. The importance of Spacelab can be seen from the following figures of its frequency of Shuttle launchings.

During the first 12 years of Shuttle operation about 1000 payloads are scheduled on 487 flights up to 1992. Spacelab will be carried on 201 or 41% of these flights, the number of Spacelab payloads being 464.

The other 54% of the Shuttle launches will be used for free flying

satellites (46% of launches will be for communications satellites, deep space-craft for inter-planetary missions, high altitude explorer craft, research satellites, etc.).

Other Shuttle launches will convey the Space Telescope and various Landsat, Seasat, earth resources, meteorological and astronomical satellites.

The Spacelab missions provide the first opportunity for a European to orbit in space. There will be only one non-American on the first Spacelab flight, which will be the Shuttle's seventh mission.

The European Space Agency put forward 54 candidates (including one woman) who had been pre-selected to travel on the first Spacelab mission. In May 1978 the Agency selected three of these candidates from whom the one European to travel on the first Spacelab mission will be chosen. The three are:

Mr Ulf Merbold, a 37-year old German physicist who has worked as a solid state physicist on crystal lattice defects and low temperature physics.

Mr Claude Nicollier, a 34-year-old Swiss astronomer who has worked on the photometric classification of the supergiant stars and who is a qualified professional pilot. He is a part time pilot in the Swiss Air Force.


Wubbo Ockels, a 32-year-old Dutch physicist who has been involved with prompt gamma ray decay and position sensitive detectors, apart from developing a data handling system.

These three were chosen from a maximum of five candidates put forward by each country.

The maximum age was 47, a degree was required in natural sciences or engineering with at least five years' experience, and fluency in written and spoken English.

The candidates had to undergo psychological tests to ensure they will be able to cope with the considerable stress of the Spacelab workload and environment. Very good memory and reasoning ability, good concentration, low aggressiveness and high motivation

EUROPEAN PRIME AND CO-CONTRACTORS

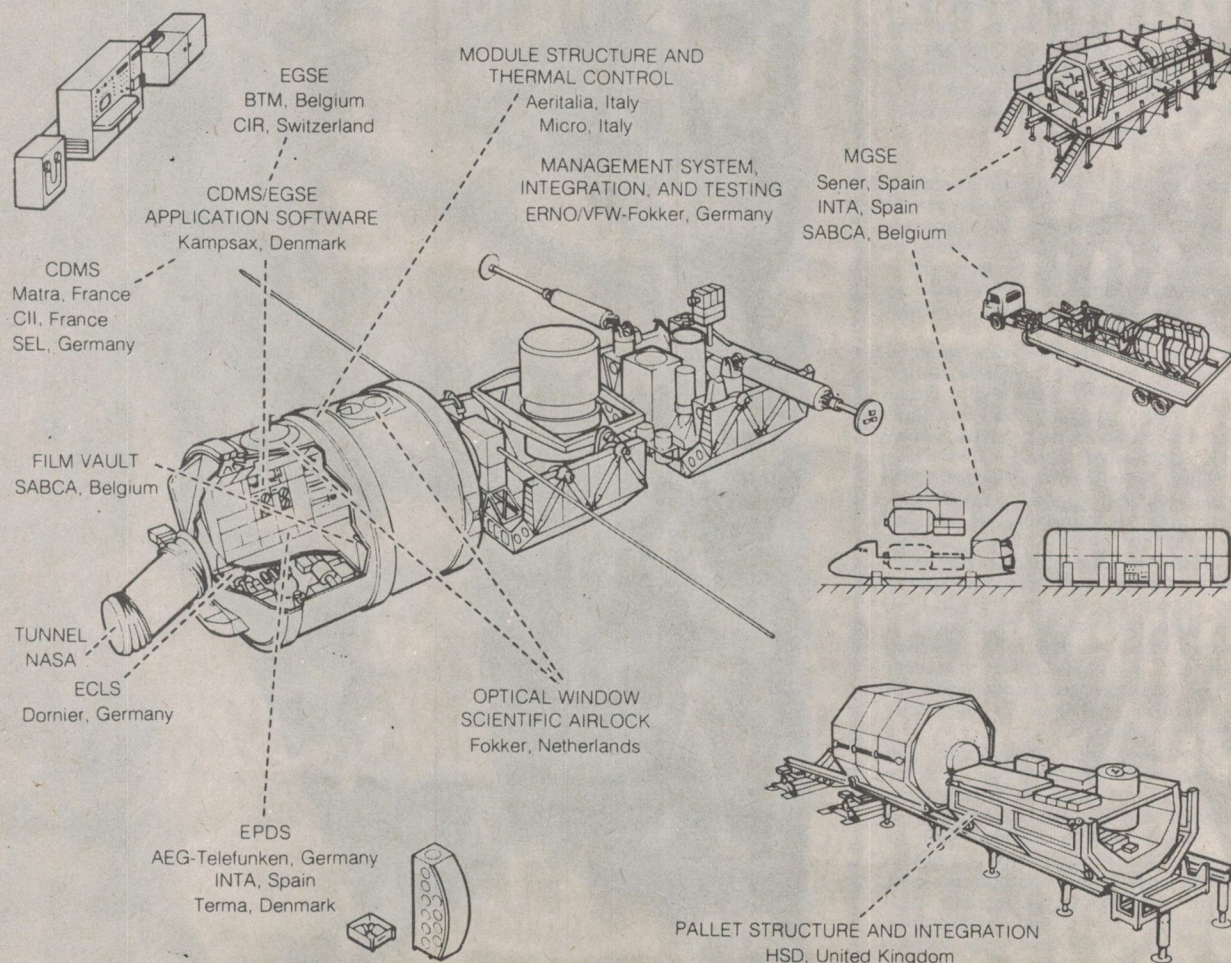

were among the requirements.

NASA has selected Mr. Michael L. Lampton, a 37-year-old-physicist and Mr. Byron R. Lichtenberg, a 30-year-old scientist for the first Spacelab flight. One of these two Americans will accompany the selected European.

The experimenters aboard Spacelab are called the payload specialists. These people are nominated for the flight by the particular organisation which is sponsoring the payload concerned. They are accepted, trained and certified for a flight by NASA.

They co-ordinate their activities in space with experimenters on the ground and with the crew of the Space Shuttle Orbiter.

The Orbiter crew includes its commander, the pilot, and the mission specialist who is responsible for the management of the Shuttle resources and equipment which supports Spacelab.

Experimenters aboard the earlier Skylab craft found it uncomfortably large. The crew found themselves floating out of reach of all of the grip bars, whilst time was lost in moving considerable distances and they became tired very quickly.

One cannot use one's lower limbs for walking in conditions of near zero gravity. It was therefore decided that the ideal space station is one composed of compartments, each not much bigger than a man.

In such a compartment a man can stand erect, but can always touch something. This principle has been used in the design of the Spacelab pressure module (which is much smaller than that of the Shuttle Orbiter payload bay), but the bay can be filled with pallets.

The Shuttle Orbiter also contains a two-deck living unit with the control station on the top deck and the quarters for both the Shuttle crew and the Spacelab specialists on the lower deck.

The specialists will work in the pressure module in shifts during missions when this module is carried and will return to the Shuttle living quarters to eat, sleep and relax.

Salyut I carried 1000 kg of instruments, Salyut 4 more than 2000 kg, but Spacelab will initially carry about 5790 kg, increasing to 9350 kg on later flights in which three pallets are used.

Principal uses

The early manned orbiting vehicles involved experimental programs mainly biological in nature. Aboard Spacelab a much wider variety of experiments will be undertaken.

Spacelab offers an environment where gravity is extremely small (about one millionth of that on the earth), although

strictly speaking the gravitational field is only zero at the centre of gravity of the whole Orbiter (including Spacelab) when there is no retardation by the atmosphere.

Such a micro-gravity environment should offer entirely new possibilities for separating biological materials to obtain pure preparations of cells for transplantations, for preparing concentrated antibodies for the treatment of certain diseases and for purifying vaccines, etc.

Ultra-pure metals, semiconductors and glasses can be processed free of contact from any container for research applications in electronics. Perfect crystals for computers, communications and other electronics uses may be processed in Spacelab as well as new materials of improved strength at high temperatures.

Spacelab will be flown above the atmosphere, so it will provide for experimental work in the fields of astrophysics, ultra-violet, optical, infra-red and X-ray stellar, planetary and solar astronomy.

Atmospheric ionospheric (plasmas) and magnetospheric physics can also be investigated by flying Spacelab at an appropriate height. Remote earth sensing for meteorology, land-use planning, resources, pollution control and other purposes can be carried out with more flexibility than is available from existing satellites dedicated to one of these purposes.

Biological experiments will be some of the most important work aboard Spacelab. There is still much to be learned about the growth and behaviour of cells in conditions of zero gravity — apart from the effect of such an environment on such a complex creature as a man.

It is intended to use Spacelab to study sea sickness phenomena for which purpose a special "sled" has been designed. A man will be rocked in a seat with various amplitudes at frequencies of between 0.01 Hz and 1 Hz; this movement can also be combined with a rotary movement.

The first mission

The total number of scientific and technological investigations chosen by NASA and the European Space Agency (ESA) for the first Spacelab mission scheduled for 1981 is 76; of these experiments, 60 are European, 15 American and one Japanese.

This first mission has been jointly planned by NASA and ESA, the available Spacelab weight for equipment, power and crew time being shared between these two organisations. The ESA will provide some of the basic experimental

equipment such as a microwave sensor, a metric camera and a vestibular sled.

About 130 investigators from Europe, 80 from the USA and a few from Canada, India and Japan will be involved in the 76 experiments.

The primary objective of the first Spacelab flight will be to verify the performance of the various systems and subsystems. The second objective will be to obtain useful data and to confirm the broad capability of Spacelab for a wide variety of space research.

The first flight will last 165 hours (about seven days), but the time for experimental work will be 140 hours.

No access to the payload will be available during the final nine days before the launch nor during the first 30 hours after landing.

As the Shuttle verification equipment on the first flight will be much more extensive than on succeeding Shuttle flights, the total payload carrying capacity will be reduced to about 4000 kg and the total energy available to about 100 kW-hr. A total of 100 man-hours will be available from the two payload specialists.

The experiments to be performed by the first Spacelab mission have been deliberately chosen from a wide range of disciplines including atmospheric physics, plasma physics, sun-earth relations, astrophysics, material sciences and technology, life sciences and earth observations.

Conclusion

It is often said by people who know little about the subject that they feel it disgraceful huge sums of money should be spent on space research when man cannot cure many forms of human disease. It seems likely that the availability of the Space Shuttle together with Spacelab will bring an enormous number of advantages to the human race, both to people who are ill and to those in good health, but progress in this expensive field of technology is inevitably limited in pace.

However, if one thinks back a few years, one can appreciate how rapidly the developments in space work have actually occurred. Man has been on the earth for a very long time yet it is only in the last twenty-two years that he has been able to leave his world temporarily and return safely to it.

It is interesting to note that the first element of Spacelab hardware has already been delivered to the USA. One of the pallets (fabricated by British Aerospace at Stevenage) was delivered to the Kennedy Space Centre in 1978 so that NASA can use it for Orbital tests of the Space Shuttle in 1980 as part of a pre-operational Orbiter payload. ●

TWO HEADS ARE BETTER THAN ONE!



Yes! the only treasure hunter with **two** search heads*

Introducing the 'Dtex': a top quality discriminator t/r treasure & metal locator.

**WORTH
\$550.00!!**

The 200mm search coil: waterproof and light weight. Perfect for walking narrow streams in search of alluvial gold (common in Australia) PLUS...

*** AT NO EXTRA COST !**

Giant 350mm search coil - for extra deep-seeking and wide-scanning coverage. Also waterproof & grassproof, it comes as a standard part of the Dtex: not an optional extra!

(VALUE \$99.55)


Up-to-the-minute electronics featuring instant push-button tuning, full range discrimination, dual mode, etc etc!

Balanced hand-grip for hours of fatigue-free use.

Our price:

\$450

Cat X-1047



welcome or easy
terms available through



PERSONAL
CUSTOMERS
ONLY

SPECIAL 7-DAY INSPECTION/TRIAL OFFER

Try the Dtex for 7 days: if you're not completely happy return it to us in original condition and packaging and we'll refund your purchase price in full!

YES! Please rush me Dtex treasure hunters @ \$450 ea. (plus \$5.50 P&P).

Name: Address:

Postcode:

I enclose ☐ cheque ☐ postal order for ☐ Or charge

my Bankcard: No 496 Signature:

Send to: Dick Smith Mail Order Centre, PO Box 747, Crows Nest NSW 2065.

DICK SMITH ELECTRONICS

NSW 125 York Street, 147 Hume Highway, 162 Pacific Highway, 30 Grose Street, 263 Keira Street,	SYDNEY. Phone 290 3377 CHULLORA. Phone 642 8922 GORE HILL. Phone 439 5311 PARRAMATTA. Phone 683 1133 WOLLONGONG Phone 28 3800	ACT 96-98 Gladstone Street, VIC 399 Lonsdale Street, 656 Bridge Road, QLD 166 Logan Road, SA 203 Wright Street, WA 414 William Street,	FYSHWICK. Phone 80 4944 MELBOURNE. Phone 67 9834 RICHMOND. Phone 428 1614 BURANDA. Phone 391 6233 ADELAIDE. Phone 212 1962 PERTH. Phone 320 6944
---	--	--	---


EXCEPT WHERE NOTED, ALL ITEMS SHOWN IN STOCK AT PRICES GIVEN AT TIME OF GOING TO PRESS.

MAIL ORDER CENTRE: PO Box 747, CROWS NEST NSW 2065. Ph 439 5311. PACK & POST EXTRA.



SHOPS OPEN 9AM to 5.30PM
(Saturday: 9am till 12 noon)
BRISBANE: Half hour earlier.
ANY TERMS OFFERED ARE TO
APPROVED APPLICANTS ONLY
RE-SELLERS OF DICK SMITH
PRODUCTS IN MOST AREAS OF AUSTRALIA.



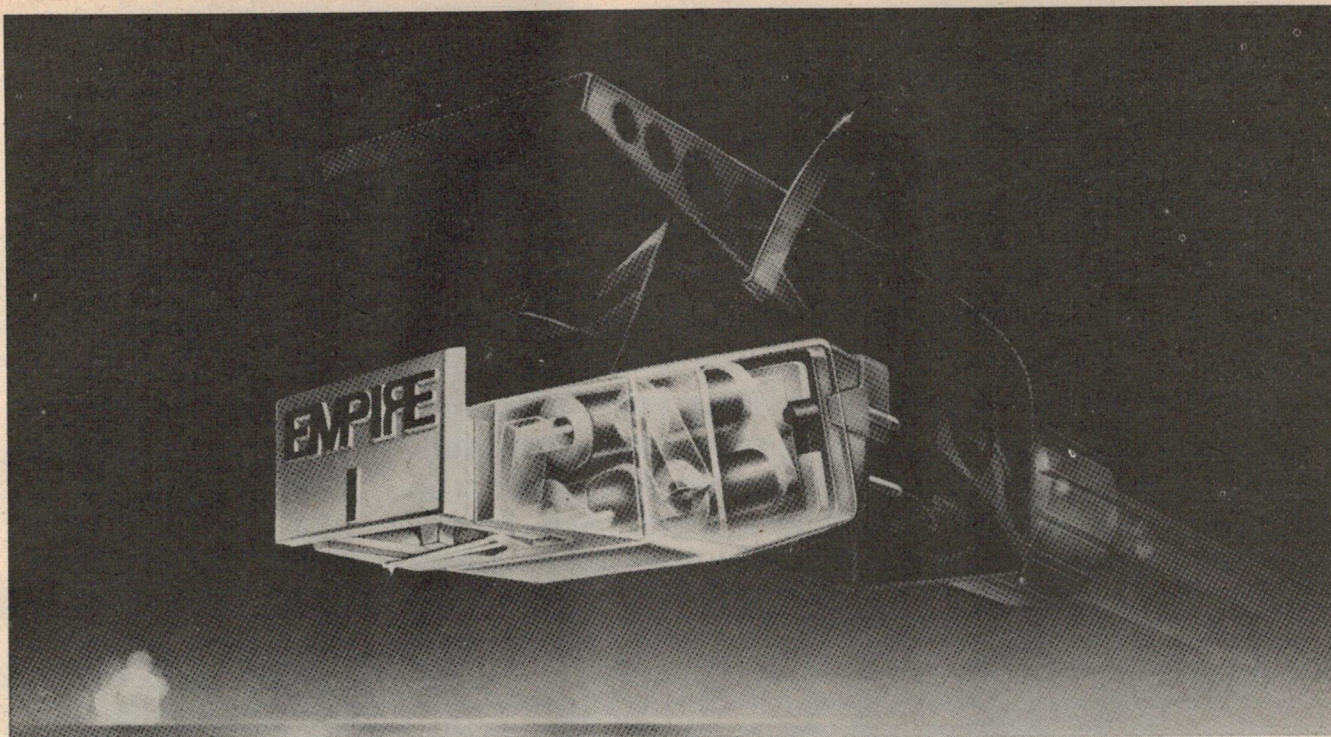

No matter what system you own there's an Empire Phono Cartridge designed to attain optimum performance.

Detail, brilliance, depth.

This is the promise of each Empire Phono Cartridge and although there are many Empire models, each designed to meet specific turntable performance characteristics, every Empire Cartridge contains the following features:

Features	Details	Benefits
Unique Fixed Unidirectional Three-Magnet Structure	Every Empire cartridge uses 3 high energy ferrite magnets in the cartridge body to provide a high level of unidirectional flux.	Higher and more linear output signal, immunity to bi-directional magnetic distortion, and improved hum and microphonic rejection.
Molded Four-Pole Magnetic Assembly	Every Empire cartridge employs a four-pole magnetic assembly that is precisely aligned and locked in place by a high pressure injection moulding process. . .providing a uniform and orthogonal magnetic field.	Improved crosstalk and reduced distortion that is insensitive to tracking force.
Tubular moving Iron Design	By using a tubular high magnetic saturation iron armature we obtain an optimum ratio of output level to effective tip mass.	Improved tracking ability and widened frequency response.
Four Coil Hum Bucking Assembly Plus Electromagnetic Shielding	Using custom designed computer controlled machines, a precision drawn copper wire (thinner than human hair and longer than a football field) is wound onto a symmetrical 4 bobbin structure. By using 2 coils per channel a symmetrical electrical circuit is formed.	Improved rejection of hum and stray noise fields.
Aluminium Alloy Cantilever	The Empire computer designed tubular cantilever provides optimum coupling of the diamond tip to the moving magnetic system resulting in minimum effective stylus tip mass.	Superb low level tracking, reduced tracking distortion. . .plus enhanced wideband separation characteristics.
Precision Ground Oriented Diamond Tips	Empire diamonds are precision ground, polished and inspected in house, using sophisticated television cameras and powerful microscopes to ensure accurate angular orientation.	Reduced tracing phase distortion, together with reduced wear of both the record and the diamond tip.

For the full story on Empire cartridges we suggest you audition one soon at your local Empire dealer. For his name and a copy of the Empire brochure 'How to get the most out of your records', write to:
Concept Audio Pty. Ltd. 22 Wattle Road, Brookvale, NSW. 2100. Tel: (02) 938-3700.

Concept Audio

Where only the very best is good enough.

Electronics rides high on the boating boom

Les Bell

Over the last five years there has been a considerable increase in the sale of pleasure boating craft including everything from rubber dinghys to opulent power pleasure cruisers. Parallel with this development has been an increase in the number of electronic instruments for a wide variety of maritime purposes. Here is an up-to-date report.

ANYBODY WHO TAKES a look at Sydney Harbour on a summer weekend would have to agree that boating must be Australia's most popular leisure activity. The Harbour is so crowded that the onlooker can hardly see the water between the boats!

For thousands of years, men managed to sail boats over quite long distances without electronics or indeed, instruments of any but the most rudimentary kind. Fortunately, in the Middle East astronomy was developed to an advanced stage in early times and celestial navigation was developed from this.

For dead reckoning on coastal passages, the earliest 'instrument' was probably the log, and yes, it actually was a log. A rope, knotted at even intervals, was attached to the log which was then dropped over the stern of the boat. The rope was payed out for a known length of time while the knots were counted. This method is not very accurate, particularly due to inaccuracies in timekeeping.

The situation was remedied in the 17th century when the British Admiralty offered a prize of ten thousand pounds for the development of an accurate chronometer. In 1762

the winning design, by English horologist John Harrison, kept an accuracy of better than two minutes on a six week voyage — a phenomenal achievement for the time.

Instrument technology has progressed somewhat since then, particularly since the introduction of electronics. Today boats of all kinds, both work and pleasure craft, carry a wide range of electronic equipment and instrumentation.

Electronics can take a lot of the hard work out of boating — calculators and computers, for example, can take a lot of the tedium out of navigation calculations, while satellite navigation systems make it an absolute snap. More important is the contribution of electronics to safety — radio is almost mandatory on any boat for this reason. Instruments which used to be mechanical, such as knotmeters and logs, have now been replaced by electronic equivalents offering improved performance and added features.

Radio communications

Probably the most important facility provided by electronics at sea is that of radio communication, both for safety and convenience. For the pleasure boat owner, there are three different types of radio communication system, each of which has its particular advantages and disadvantages (is nothing simple these days?).

Briefly, the three systems and their important parameters are as follows:—

Latitude, longitude and time can be obtained from this satellite navigation system receiver, enabling a navigator to fix his boat's position within a few metres.



27 MHz: cheap, medium quality, short range, undependable for safety;

VHF marine: medium cost, medium range, high quality with constant watch on distress frequency;

HF marine: expensive, variable quality, long range capability with constant watch on distress frequencies.

The correct system should be chosen bearing in mind your boating activities. A speed boat which never ventures outside the harbour would obviously require a totally different radio from an ocean-going yacht or fishing boat.

The primary consideration in all cases, however, should be safety rather than convenience. Radio has saved so many lives at sea that its value is inestimable — and this should be borne in mind when considering an installation on any boat.

Apart from safety, a radio has many uses on board a boat. Members of fishing clubs, for example, can keep each other posted on their activities using a 27 MHz 'chatter channel', while ocean racers, in the Sydney-Hobart for example, report their positions every few hours by HF radio.

At present, marine radio is undergoing rapid change with many boat owners contemplating the installation of new equipment.

The 27 MHz service uses sets similar to CB rigs but on different frequencies. Power input is limited to five watts on AM, and although transmission is over water, distances for reliable communication are still only of the order of 15 to 30 km. Being an HF band the service is subject to interference through long distance "skip", so it cannot be relied upon for important communications.

Unfortunately the 27 MHz channels are not officially monitored by any professional full-time agency in the way that the HF and VHF services are supported by OTC. All monitoring of the safety channel (27.880 MHz) is by volunteer organisations such as the Volunteer Coastguard, who cannot provide round-the-clock service. It would be very unwise to depend upon this service for safety on a winter weekday — there may be no-one listening.

The major advantage of the 27 MHz service is the low cost. A complete installation, including the fibreglass whip antenna, (just like a CB mobile whip), will cost around \$100 to \$250. Hand-held units (walkie-talkies) are even cheaper, and have many uses, including the ability to be transferred to a dinghy (or a life raft — if ever things get that bad!), or taken onto the beach (while barbecuing?) to get weather updates, etc.



The AWA Pilotphone 6 is a 24 channel, 25 watt VHF/FM transceiver which will operate on the Seaphone channels.

Because of its low cost, it would be unwise *not* to have a 27 MHz radio on board any boat that is bigger than a dinghy. For weekend use or fishing in the harbour, it provides safety and convenience without breaking the bank.

Where offshore trips of any length are contemplated, or where added facilities are required, then the more expensive VHF/FM or HF/SSB services should be considered.

VHF FM radio

This type of radio provides clear, interference-free communications over relatively short distances, generally in-shore and short-range ship-to-shore and to coordinate traffic in major ports.


Some countries have recently extended this service to small commercial and pleasure craft. It's a sort of sea-going equivalent to the 'land mobile' service used by taxis, couriers, etc.

VHF has several advantages over the cheaper 27 MHz system and HF single sideband equipment. Firstly, for the ranges required for general in-shore and coastal communications, it is inefficient to use a transmission medium that covers both long and short distances.

On HF, interference from man-made and atmospheric noise interrupts communications — sometimes quite severely. FM receivers are not affected by this sort of interference, except on very weak signals, and clarity of reception is

Services and Frequencies on marine radio

SERVICE	VHF/FM	HF/SSB	27 MHz
International Safety/Distress & Calling	chan. 16	2182 kHz (AM)	—
Supplementary Distress/Safety and Calling	—	4125 kHz	—
Supplementary Safety/Distress and Calling	—	6215.5 kHz	—
Weather/Working and Telegrammes	chan. 67	2201 kHz 4134.3/4428.7 MHz	—
Pleasure craft ship-ship-shore safety info and search and rescue	chan. 67	2524 kHz	27.880 MHz
Club freq.	chan. 73	1725 kHz 2032 kHz	27.890 MHz 27.900 MHz 27.910 MHz
Pleasure craft ship-ship only	chan. 70	2284 kHz	—
Radiotelephone 'Radphone' to OTC coast stations	—	2760 kHz 2056 kHz	—
Seaphone	chan. 26/23	—	—
Sth. Pacific cruising — guarded by VIH Hobart during hours of operation	—	4143.6 kHz	—

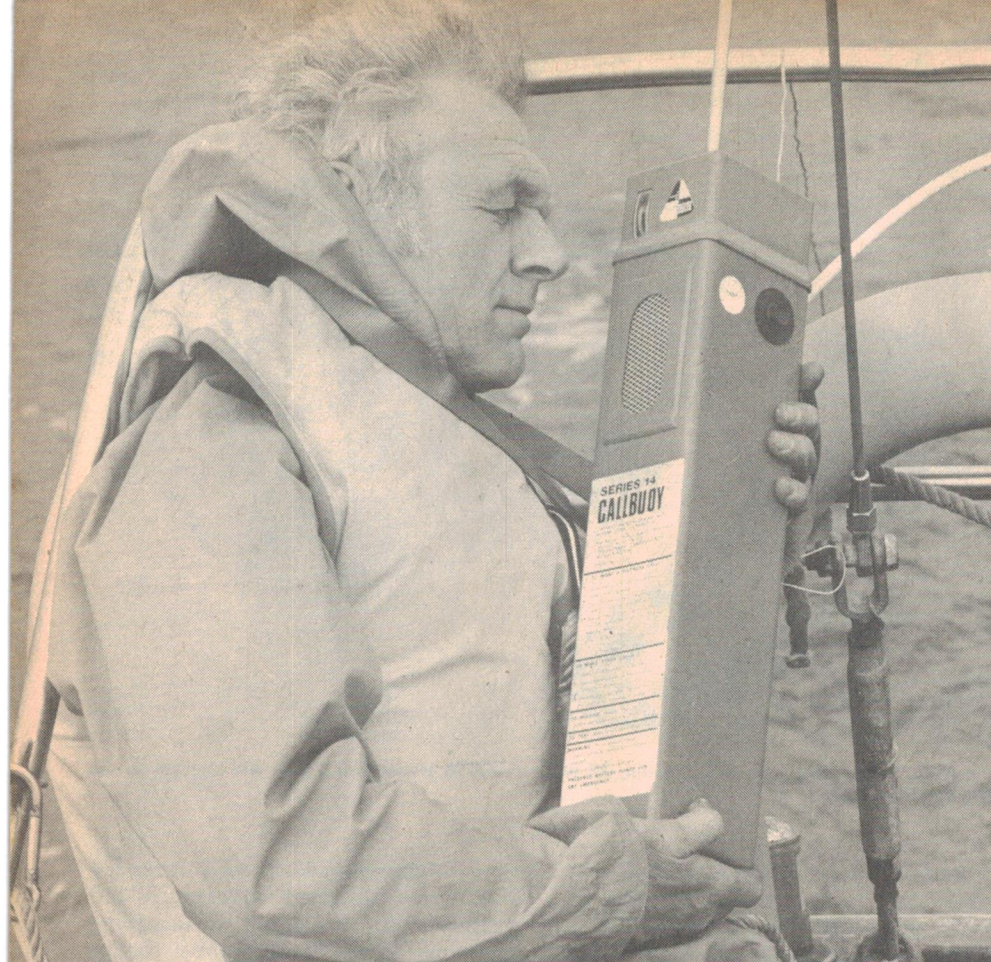

Although Emergency Position Indicating Radio Beacons (EPIRBs) have been commonly available overseas for some years, lack of appropriate standards, plus tough type-approval specs have delayed their introduction here. The model illustrated incorporates a two-way radio and is (regrettably) not licensable in Australia.

consistently very high. Secondly, interference from unwanted signals from faraway stations ('skipping' via the ionosphere) does not occur. A 'capture effect' results in only the strongest station received being heard. Consequently, two close stations may converse satisfactorily despite other operational stations nearby.

Many VHF transceivers are switchable to low power when operating over short distances to avoid unnecessary interference to other users.

Recent expansion of the VHF service in Australia to match international standards allows for five classes of service: port operations, commercial (oil refineries, tugs, etc.), professional fishing, non-commercial, and public correspondence. The last two classifications apply to pleasure craft, and allow ship-shore, ship-ship and telephone (Seaphone) calls.

The VHF channels are between 156 MHz-162 MHz, and are a mixture of simplex and duplex channels — on some channels, the station transmits and receives on the same frequency, while on others the frequencies are different. Full duplex working is used and has the advantage that both stations can transmit and receive simultaneously, allowing a natural conversation to take place

(important for calls made by people not acquainted with radio procedures).

Unlike the 27 MHz band, the VHF service is monitored round the clock by a professional safety service — in this case, the Overseas Telecommunications Commission. In the Sydney area, for example, channel 16 is monitored by operators at Sydney Radio (VIS) at La Perouse.

The range of communication on VHF is extremely dependent on transmitter power and antenna heights. Ship to ship communication is generally possible up to 20 nautical miles, while Sydney Radio can communicate reliably over 60 nautical miles and sometimes further. Basically, VHF is limited to 'line of sight', and some areas, notably around the Hawkesbury, are in radio 'shadow'.

The service will be expanded in 1980 with the addition of transmitters near Wollongong and Newcastle, which will provide coverage to Tuncurry in the north and south of Batemans Bay in the south. At the same time, the west coast of Australia will be brought into the fold, with installations in Perth, Dampier and Port Hedland. All these locations will monitor the distress channel (channel 16). It is expected that the service will eventually be expanded

to cover the entire east and south coasts from Cairns round to Adelaide, providing Australia with one of the most advanced VHF radiotelephone services in the world.

A typical VHF/FM installation costs between \$450 and \$1350 including the antenna. Perhaps the major advantage of the VHF service is high speech quality, coupled with ease of use, which makes possible communication between a VHF station at sea, and any telephone in Australia or overseas, through the OTC Seaphone service.

HF radio

HF is usable over long distances, providing fairly reliable, if somewhat unpredictable, communications. HF radios are usually larger than other kinds, require more power, and are more difficult to install. They're more complex to use too.

Three major HF bands are usable by pleasure craft around Australia — 2 MHz, 4 MHz and 6 MHz. Each has different propagation characteristics dependent on the time of day, time of year and position in the sunspot cycle. Operation depends on the ability to pick the right band for communication over the appropriate distance.

At present all communications above 4 MHz must be on SSB, and by 1982 all double sideband (AM) equipment will be obsolete, except for 2182 kHz, the international distress frequency. SSB offers clear advantages over AM.

The major objection that most people have to HF radio is cost and complexity of installation. For a start, an HF radio consumes more power than other kinds, and may require an extra battery or heavier alternator.

HF is particularly susceptible to interference from ignition and other sources (such as fluorescent lights) as the receiver will have to cope with much lower level signals than with 27 MHz and VHF radio. Hence all on-board electrical equipment must be adequately suppressed.

Another problem is that an HF radio antenna requires an earth, as most are loaded whips which require a ground plane. This can be a major problem, particularly on metal hulled craft, as any junction of dissimilar metals which is exposed to salt water forms a voltaic cell and the resultant current degrades the metal, causing rust.

For a wooden or fibreglass boat, the best earth is a large (at least $\frac{1}{4}\text{m}^2$) metal plate beneath the hull. A modern alternative is the Dynaplate, a 50 x 125 x 12 mm (approx) block of metal beads which, because it is porous, has an effective surface area of over $1\frac{1}{4}\text{m}^2$.

Antennas for HF, (on smaller craft at least) are usually 3½-5m fibreglass whips, although in yachts the rigging wire from the stern to the top of the mast will make a much better radiator. The total length of the backstay antenna and its lead-in should be less than 17m for best results on the Australian bands i.e. up to 6 MHz.

Total cost of an installation can be \$1000 to \$7000, depending on power output and facilities and performance offered.

The major importance of HF radio is in its contribution to the safety of life at sea. To this end, Australian coastal radio stations maintain 24 hour watch on the international distress frequency of 2182 kHz, as well as 4125 kHz and 6215.5 kHz. Other frequencies are reserved for ship to ship working, traffic

licensee is required to pass a test in order to obtain the restricted operators' certificate of proficiency. This test is not difficult — the candidate has to have a knowledge of operating procedures and equipment controls, an ability to repair minor faults and a general knowledge of the appropriate rules and regulations.

Seaphone

Seaphone is a high quality VHF duplex link using channels 23, 26 and 27 to provide a ship-shore telephone link. It now operates in Sydney and Melbourne following a two-year pilot scheme.

The system is accessed by dialling a prefix and requesting the Seaphone service. If the required vessel is within range and on channel the connection will be made within minutes. (See



The LX40 speed/distance indicator has a large, easy to read LCD display and has been designed to mount on the dashboard of a power craft.

between OTC stations and ships, and other purposes.

Reliability of communications is dependent on propagation conditions and the choice of frequency. On the 2 MHz band, daytime communications are limited to 160 km or so, but at night greater ranges can be expected. This band suffers least from interference from distant stations, but in tropical areas a high static level can be a problem. The 4 MHz band is more versatile, giving distances up to 500 km in the day and considerable further at night. Best communication over long distances is on 6 MHz, but this band is prone to interference from foreign stations. Choice of correct band therefore depends upon the distance from the station to be contacted, as well as the time of day and, to a limited extent, propagation conditions in general.

Operation on HF is a bit more tricky than on the other bands, and so the




The Seafix hand-held RDF incorporates a compass to give true bearings to 1° but only covers 'long wave' for shipping weather forecasts and the beacon band.

"Communications" news, p. 86)

Seaphone channel 67 is held for 'less than full distress' messages which are nevertheless still urgent. OTC Coast Radio stations also use channel 67 to broadcast weather and navigation hazard reports at set times throughout each day.

The Seafarer 3 is fairly typical of the 'rotating LED' type of echo sounder, offering depth measurements to 100 fathoms (180m).

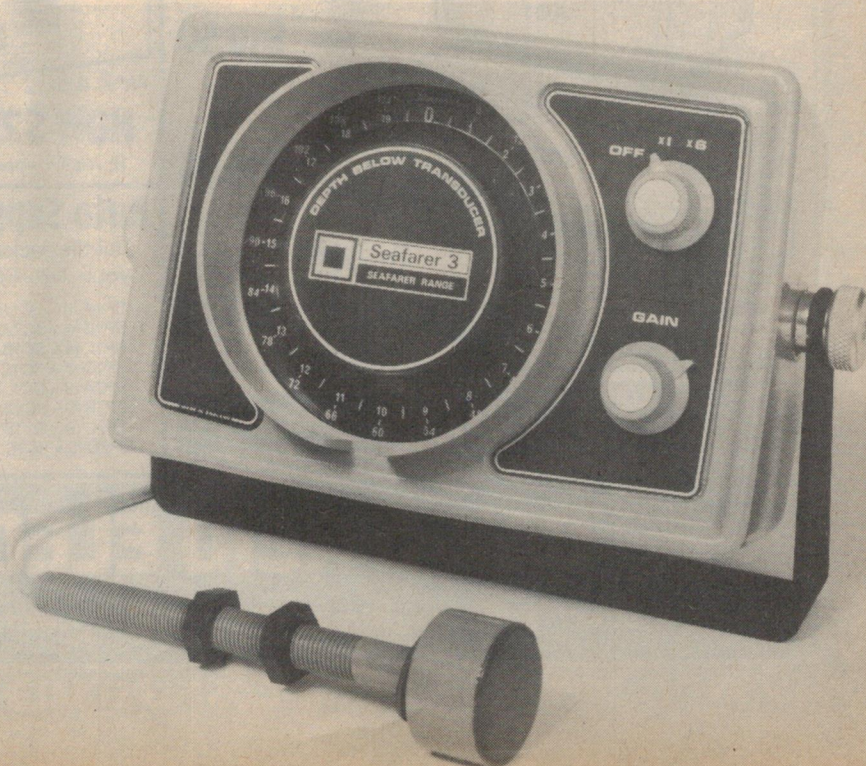

We now carry stock of most PC Boards for ETI and EA projects.

METAL DETECTOR ETI 549A only \$2.00

We also have in stock all components you need to build this exciting project.

Hybred Amplifiers

SI-1010G 10 watt

\$6.25

SI-1020G 20 watt

\$12.45

SI-1030G 30 watt


\$15.35

SI-1050G 50 watt

\$23.45

SAVE on AMPLIFIER CASES

These handsome amplifier cabinets come with timber case finished in walnut woodgrain.

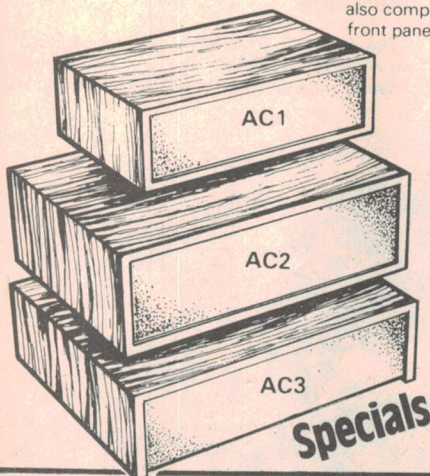

The chassis constructed from 20 g zinc plated steel and all are ready to drill, punch, or just look at. Now also complete with anodized alum. front panel.

Length 300 mm
Width 195 mm
Depth 92 mm
AC1 \$10.50


Length 360 mm
Width 282 mm
Depth 110 mm
AC2 \$16.95

Length 380 mm
Width 295 mm
Depth 110 mm
AC3 \$14.75

Specials

We are here!

bankcard
welcome here



DAVID REID ELECTRONICS PTY LTD

127 York Street Sydney Australia P.O. Box 317 Newtown NSW 2042 Tel. 29 6601

BIG DISCOUNTS TO CELEBRATE!
Now that we're in the centre of town it's easy for you to get the best bargains going. Come and compare the prices on the whole range of Electronics.

Pigtail Electrolytic


10 mfd 16 volt	1-9	10 up
22 mfd 16 volt	18c	13c
47 mfd 16 volt	18c	13c
100 mfd 16 volt	18c	13c
220 mfd 16 volt	22c	17c
470 mfd 16 volt	35c	30c
1000 mfd 16 volt	45c	40c
2200 mfd 16 volt	60c	50c
	84c	75c

2.2 mfd 25 volt	18c	13c
4.7 mfd 25 volt	18c	13c
10 mfd 25 volt	18c	13c
22 mfd 25 volt	18c	13c
33 mfd 25 volt	22c	17c
47 mfd 25 volt	22c	17c
100 mfd 25 volt	22c	17c
220 mfd 25 volt	55c	50c
470 mfd 25 volt	55c	50c
1000 mfd 25 volt	70c	60c
2200 mfd 25 volt	\$1.25	\$1.00

4.7 mfd 50 volt	18c	13c
10 mfd 50 volt	18c	13c
22 mfd 50 volt	22c	20c
47 mfd 50 volt	22c	20c
100 mfd 50 volt	30c	27c
220 mfd 50 volt	60c	55c
470 mfd 50 volt	80c	70c
1000 mfd 50 volt	\$1.20	\$1.00

GREENCAPS Specials MYLAR 50 volt MYLAR 100/250 volt

Small green P.C. type mount. Ideal for projects and all P.C. boards.	.47 mfd	26c
.001, .0015, .0022, .0033	.68 mfd	55c
.0047 mfd, .0068 mfd	1 mfd	60c
.01, .015, .022, .033	1.5 mfd	\$1.20
.047 mfd	2.2 mfd	\$1.40
.068 mfd		
.1, .15, .22 mfd		
.33 mfd		



CRC SPECIALS

CRC 2-26

- ★ Improves electrical properties
- ★ Fights rust and corrosion
- ★ Dries and moistureproofs electrical equipment



16 oz Aerosol **\$3.50**
6 oz Aerosol **\$1.70**

CRC FREEZE


- ★ Provides instant cooling action for fault finding
- ★ Useful for testing thermocouple devices
- ★ Complete evaporation leaves no residue

300 g Aerosol **\$2.70**

MICROPHONE STANDS

Floor stands with solid base and standard thread to suit most microphones.

Only \$19.50



Save on RECHARGEABLE BATTERIES



NPK-4.5-12
NOW \$25.30
12 volt 4.5 ampere hour

Auto Suppressor Packs

Bubble packed kits to suppress your car. 4 or 6 cyl.

SP1A (4 x SC1, 1 x SC2-4-5)	\$3.95
SP1B (4 x SC1A, 1 x SC2-4-5)	\$3.95
SP1C (4 x SC1B, 1 x SC-4-5)	\$4.35
SP1D (4 x SC1C, 1 x SC2-4-5)	\$4.35
SP2A (6 x SC1, 1 x SC2-4-5)	\$5.25
SP2B (6 x SC1A, 1 x SC2-4-5)	\$5.25
SP2C (6 x SC1B, 1 x SC2-4-5)	\$5.75
SP2D (6 x SC1C, 1 x SC2-4-5)	\$5.75



POST

Mail Order Instructions: Minimum P&P \$1.00. Orders over \$9.99 must include additional postal charges (see below).
ORDER VALUE Charge
\$5-\$9.99 Nil
\$10-\$24.99 \$0.50
\$25-\$49.99 \$1.50
\$50-\$99.99 \$2.50
\$100 or more \$4.00
E & OE.



A typical radar installation consists of a scanner unit, which houses the transmitter, and a display unit, which contains the CRT with its associated electronics and controls. This Koden unit has an output of 6 kW and a range of up to 32 nautical miles.

Radar

One of the greatest contributions to the safety of larger vessels manoeuvring in busy shipping lanes has been made by radar and a modern solid state technique has made it feasible to install radar in smaller vessels such as pleasure craft.

Typical modern radars have ranges from 16 to 100 nautical miles, basically dependent on the power output. They are transistorised throughout, except for the magnetron and display tube. A 10 kW peak output power unit, for example, would have a range of up to 64 miles, with a power consumption of 160 W on a 24 V supply. Most operate in the X band around 9400 MHz, and have interference rejection circuitry to reduce the effect of other ships' radars on the display.

The use of semiconductors, particularly integrated circuits, to reduce the size and power consumption of radar sets has also made possible the inclusion of sophisticated and conventional features, such as digital indication of range, and automatic collision warning alarms. Most sets consist of two units, a console which contains the display circuitry and controls, and a transceiver/scanner unit which contains the RF electronics as well as the rotating antenna. Often the sets have two or more scanners, the larger antennas having reduced beam-width with consequent improvement in definition and range.

A radar-related item which boat owners should consider, especially if they take their craft into or near busy shipping lanes (particularly in conditions of poor visibility) is a masthead mounted radar reflector. This will enable radar-equipped large vessels to spot small craft in heavy weather, eliminating the danger of collision.

Echo sounders

Echo sounders work by transmitting an impulse and measuring how long it takes for echoes to return. Unlike radar, which transmits radio frequencies, echo

sounders operate by transmitting ultrasonic energy. All echo sounders operate on similar principles, varying only in type of display, operating frequency and output power.

The basic type operates on a frequency of around 30 kHz, and indicates depth of water below the keel. The display usually consists of a LED or neon tube which is spun around the circumference of a calibrated scale at constant speed. At the time that the acoustic pulse is sent, the LED is flashed, and this should appear at the zero mark on the dial. The return echo also flashes the LED, but by this time it has moved around the dial an angle proportional to the time since the transmit pulse.

Reflections from shoals of fish also appear on the display, making the echo sounder a useful device for fishermen. Most fish finders, as they are known, are fitted with a pen recorder to indicate echoes so that a good spot can be returned to. The chart-type fish finders provide considerably more information than rotating neon or LED types, and use special circuitry to show the nature of the bottom.

Autopilots

Several different types of autopilot are available, the major distinction being between those intended for power craft and those for sailboats.

A powerboat can be set in a particular direction and will keep going that way, more or less regardless of changes in the wind or tide, taking its heading from a compass. A sailing boat, however is much more dependent on the direction of the wind. Were an autopilot to attempt to keep a boat on the same heading regardless of wind change the sails would be wrongly set, and the boat could well drop speed or be put in an uncomfortable or dangerous situation. Hence most autopilots for sailboats, attempt to keep the boat on the same heading relative to the wind, (although some units offer a choice of compass or wind vane to generate the control signal).

Basically, an autopilot is a straight-

forward servomechanism: the actual heading is compared with the desired course — the error signal being used to drive a servomotor, applying correction to the rudder.

The effects of swell and waves will however cause the rudder to move, and the servomechanism will hunt, perpetually trying to correct an error that is not particularly significant. To avoid this, most autopilots have a sea-state control, which introduces a low-pass filter into the signal path, thus eliminating the hunting action. Some models have switchable settings, to compensate for different sea conditions.

The Coursemaster 100, manufactured by Coursemaster Autopilots in Sydney, for example, is designed for power vessels and offers a wide range of features. Using a compass for heading information, the Coursemaster 100 has a 'dead band' of 4° around the desired course, as well as a five position 'sea-state' control. On boats which have a large turning inertia, the Coursemaster can even apply counter rudder to eliminate overswing.


Although some autopilots require a course to be steered and the autopilot to be switched on to hold that course, the Coursemaster is slightly unusual, the autopilot can automatically bring the boat onto a preset correct course.

Satellite navigation

A very accurate electronic/satellite are available, the major distinction system, which uses the US Navy's Transit satellites. Six of these satellites, in polar orbits, circle the globe 960 km up at a speed of 7½ km/s. As each satellite orbits the earth in about 96 minutes, it comes into view at every point on the earth's surface at least four times in every 24 hours. The satellites can provide positional information 19 or 20 times each 24 hours. The passes are not evenly spaced however but the worst delays under normal circumstances are 2½ to 3 hours.

Every two minutes as it orbits, each satellite transmits a time signal with an accuracy of better than 33 μs. Because the orbital parameters of the satellite are already known, a hyperbolic line of position for the observer can be obtained using doppler techniques. To ensure accuracy, the satellites constantly transmit details of their exact orbital parameters on 150 and 400 MHz. This information is updated every sixteen hours, based on observations made by four dedicated tracking stations in the USA. Using the most sophisticated dual-frequency receivers, a positional accuracy of a few metres can be achieved anywhere in the world.

Using a single-frequency receiver the

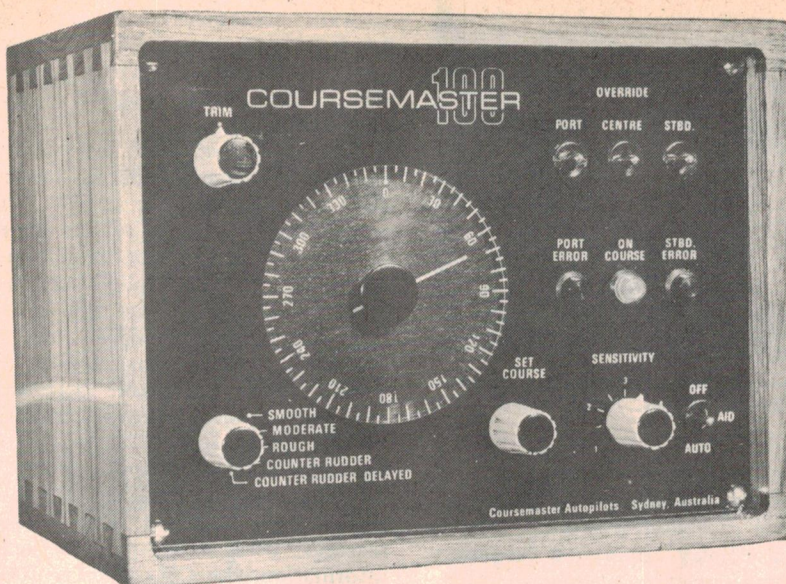

The Coursemaster 100 autopilot, which offers controls for all sea conditions.

accuracy reduces to about ± 400 m; still more than adequate for most commercial applications. Cost of such an installation is about \$14 000.

Current satellite navigation receivers often incorporate extra features such as predicting the next satellite pass, the ability to perform dead reckoning navigation between passes, and the ability to ring an alarm when the destination is approached. Various options are available, such as printers and interfaces to logs and gyro inputs. One model, the Furuno FSN-20B, will even automatically apply corrections to its matching Omega receiver!

Knotmeters and logs

The most common transducer for speed measurement is a small impeller monitoring water flow. As it rotates it pulses a reed relay or similar switch to provide a signal suitable for subsequent analogue or digital processing and display.

These devices are accurate to about 2% if correctly installed and calibrated, but may become clogged by seaweed and other flotsam.

To get around the problem of keeping the hull shape clean, with no protrusions, there are a couple of electronic systems with no moving parts.

The first transmits ultrasonic pulses through the hull into the water and listens for reflections from bubbles or other particles moving past the hull. The frequency of the returned signal will differ slightly from that transmitted due to Doppler shift — and this will be proportional to the velocity of the water flow, the instrument thus displays the difference frequency, normalised to

units of speed. Further circuitry compensate for variations in the speed of sound in water at different temperatures and salinities.

A second, more common system, exploits Fleming's left hand rule for generators. A hull-mounted electromagnet creates a magnetic field at right angles to the motion of the boat, with the lines of flux passing vertically through the hull. Since seawater is conductive, a voltage is induced in the water, proportional to the velocity at which the water cuts through the field. Two small studs, protruding through the hull, pick up this voltage, and there you have it; a beautifully simple, accurate and elegant knotmeter with no moving parts which indicates speeds from 50 knots plus!

Typical of this type of log is the Seafarer Log, marketed by AWA. This unit has a low profile retractable transducer, and has three switchable speed ranges (8, 16 and 32 knots). It is energised by an internal nine volt battery, or ship's supply of 10.8 to 40 volts. The log includes a counter which records in hundredths of nautical miles.

As well as the traditional analogue meter these instruments can have digital liquid crystal displays (LCD). The Corinthian S100L distance recording log and the S100K knotmeter, for example, are a matched pair of units operating from one impeller. The units mount flush in a bulkhead through a 100 mm aperture. The S100K records to tenth-knot accuracy between 0.1 and 15 knots. For powerboats, the LX40 combines a 35 knot speedometer with a 19.9 mile trip log in one bracket or console-located instrument.


Probably the most important sailing instrument is the log, often combined

with a knotmeter. The log is needed for dead reckoning navigation, and the knotmeter gives an indication of the efficiency of the sails setting — more effectively than can be done by eye.

For sail craft, special expanded-scale knotmeters can resolve changes of as little as 0.01 of a knot. To reduce spurious readings, averaging techniques provide a continuous indication of performances — very important when tuning racing yachts.

Wind direction may also be measured. Perhaps the best way is via a pair of selsyns, one at the top of the mast, the other, in the indicator, at the bottom. These will provide round-the-compass indication of wind direction in convenient analogue form.

Wind speed is still commonly measured by a rotating anemometer. Early devices consisted of a rotating cup coupled to a dc generator, the output voltage of which was proportional to the angular velocity. A simpler method using large scale integrated circuits is simply to generate pulses and count them for digital display. This technique is more reliable both mechanically and electronically.

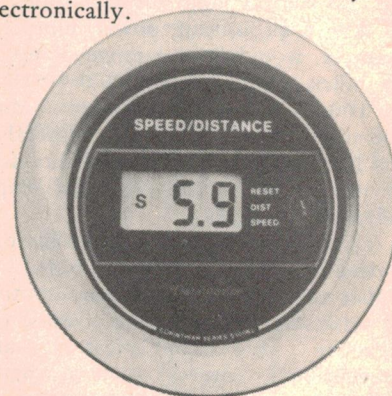

This Datamarine depth/speed indicator features an LCD display and is housed in a weatherproof case.

The major problem with both wind speed and direction indicators is mechanical reliability in the mast-head unit. There can be few more hostile environments in which an electro-mechanical device has to work reliably and repeatably, with only infrequent maintenance due to its inaccessibility.


An anemometer with no moving parts is made by Telcor. The unit operates by measuring the cooling effect of the wind passing over a heated element. This element is held at a fixed temperature above ambient. Wind passing over the sensor has a cooling effect directly related to wind velocity. Owing to this cooling effect more current is required to maintain the sensor at its constant temperature as the wind velocity rises, and by monitoring the current, wind velocity can be displayed.

This type of anemometer has no stiction or friction. It can follow even minor changes in wind velocity and will provide reliable indication at very low wind speeds. Its sensing element is small and light and its principle of operation lends itself to a form of readout that can be readily expanded at the lower end so as to allow quick recognition of the smallest change at the masthead. Lighthouses and lightvessels have radio beacons which extend their usable range far beyond the horizon. Areas of 'civilization' invariably have broadcasting stations, many of which transmit from known fixed locations 24 hours a day. Transmitters such as these may be used for quick and accurate direction finding.

Radio direction finding (RDF) equipment enables the user to take a bearing on a fixed station relative to his boat — and the resultant bearing will usually be accurate to within at least 2° .


The simplest types of RDF receivers are operated by manually turning a loop or ferrite antenna until the required beacon is heard at minimum signal strength. Beacon direction is then read off a calibrated scale. A separate sensing antenna must be used to tell whether the beacon is in front of you or behind you. This sensing antenna is often incorporated in the receiver — as in the Fujion F-2000A RDF shown.

Some hand-held RDFs, such as the Seafix, have a built-in compass. Using a unit such as this, it is possible quickly to obtain a fix plotting two or more bearings.

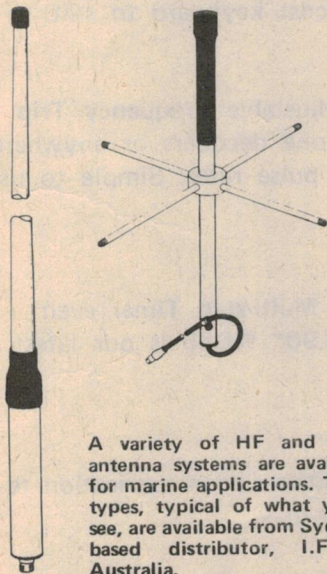

A variety of HF and VHF antenna systems are available for marine applications. These types, typical of what you'll see, are available from Sydney-based distributor, I.F.T.A. Australia.

Fully automatic direction finders, such as the JMC 2206D, are now available, many offering digital display of frequency and electromechanical or digital display of bearing. These units generally have full-size external loop antennas.

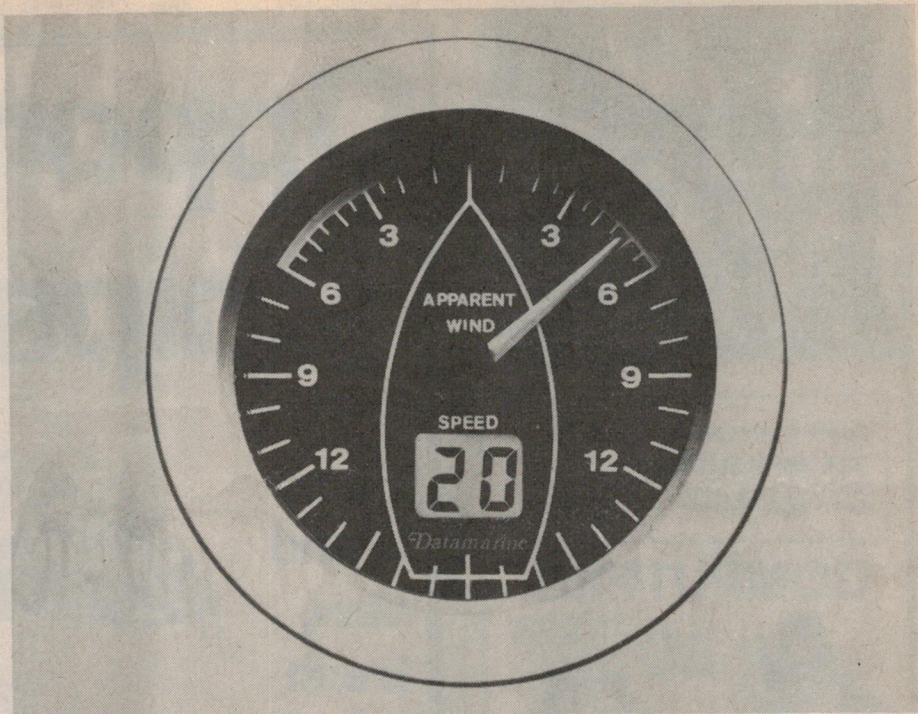

The Datamarine 'Corinthian' model LX360 'Wind Machine' sensibly uses digital readout for the wind speed display but analogue dial type indication of wind direction through 360° .

Many small RDFs will double as broadcast receivers, and are useful for obtaining weather forecasts, etc. The Fujion F-2000A, for example, covers AM and FM broadcast bands, LW, marine band and the VHF marine band. It will run either on internal cells or on an external 12 V dc supply.

Omega

The only hyperbolic navigation system to provide good coverage of the Australasian area is Omega, which is a global system designed and operated by the US Navy. It is a VLF (10-14 kHz) system, and because of this, is primarily intended for use by submarines, as only VLF radio waves can penetrate seawater to any depth.

A basic Omega installation costs between \$4000 and \$7000, and in good conditions can give a fix to within 2000 metres. However, in unfavourable conditions, errors as large as 8-10 km may occur. To correct this, there is a version of Omega called differential (or micro-) Omega, which uses a fixed Omega monitoring station in the area of operation transmitting local corrections which can be applied by users to the basic Omega hyperbolic information. This brings the accuracy of Omega to a par with the short range hyperbolic systems such as Decca.

Miscellaneous gear

For celestial navigation a lot of the tedium and possibility of errors has been taken out of sight reductions by

the use of pre-programmed special-purpose calculators. A well known example is the Tamiya NC-77. This can handle a wide range of navigation calculations to solve latitude and longitude from sextant sights of celestial bodies. In addition, it can calculate a fix by dead reckoning, and perform numerous other calculations.

The major benefit of these calculators is to the offshore navigator who often has to perform complex calculations when tired, wet, hungry or generally finding difficulty in concentrating. Under these circumstances, it is easy to make mistakes, but if a calculator can do all the legwork, it becomes feasible to take more sights than are necessary, as a check.

To power all the electrical equipment it is possible to put on a small yacht one must either run the engine regularly for a fairly long period, or if one is lucky enough to berth at a marina, install a battery charger. An alternative, now starting to become economically feasible, is to install a small solar cell panel as a trickle charger.

Amongst those supplying solar panels are Amtex of Chatswood in Sydney, Challenge Electric of Brookvale and Greenwich Marine, both also in Sydney. Philips also stock a range of solar panels, some specifically for this application.

In general, a 330 mm square panel produces around 400 mA or so at 14 V. Battery charging models generally deliver about 10 watts or so, models for lighting applications, somewhat less. ●

Bill Edge's ELECTRONIC AGENCIES

115-117 PARRAMATTA ROAD
CONCORD, 2137. Tel: 747-6472
(Corner Parramatta Rd & Lloyd George Ave.)

Some fantastic

DICK SMITH ELECTRONICS

products available, and on a SUNDAY too. All at current prices with a few specials thrown in.

COMPUTERS



Yes... Electronic Agencies are now distributors for the famous range of "COMMODORE" computers.

\$1399.00 \$1529.00
PET 2001-8 CBM 3001-16

As these computers are made by one of the largest computer manufacturers in the world, the software and hardware is almost limitless. The instruction manual is so comprehensive that even if you know nothing about electronics and have never laid eyes on a computer, you will have no trouble. If you do happen to get stumped — no worries — as importers of these machines you have all the resources of the vast Hanimex company to help you out, not to mention Electronic Agencies. We have a CBM 3001-16 on display in our store.

PET 2001-8: Standard Pet with video display unit, cassette and calculator type keyboard. 8K bytes of memory. Normally \$1499. Now only \$1399. Save \$100.

CBM 2001-16: 16K bytes of memory with video display unit and large keyboard. External cassette optional extra. Normally \$1829. Now only \$1529. Save \$300.

CBM 3001-32: Same as 2001-16 but with 32K bytes. Normally \$2199. Now only \$1979.10. Save \$220.

PRINTERS

3023 PRINTER: 80 column dot matrix. Plain paper with full graphics. Normally \$1499. Now only \$1349.10. Save \$149.

3022 PRINTER: 80 column dot matrix as above, with forms handling capability and tractor feed. Only \$1529.10. Save \$169.

FLOPPY DISK

CBM 3030: Dual drive intelligent mini-floppy system, 343K net user storage capacity. Only \$1889.10. *ROM Set required for 2001-8 \$91.80.

EXTERNAL CASSETTE DECK only \$134.10

Includes cable to computer.

TRADING HOURS:
9 am-5.30 pm Mon-Fri.
9 am-Noon Sat.
10 am-2 pm SUNDAY

MAIL ORDER: \$1.00 pack & post plus 5 percent of order (additional pack/post) up to \$80, thence a flat \$4. All heavy & bulky items sent freight on via Comet.

Opportunity Chips

three
brand
new,
fresh
off the
line chips
designed to get
you into the market place fast



1

How about a single chip **Keyless Lock** in a 14-pin DIP for around **\$2.63***. Package it your way. We'll even help you with a low cost keyboard to suit. Ask for LS7220.

2

A 14-pin Hi-in-Low fully adjustable **Frequency Trip** for Flow Meters, Tachos, Tone decoders or anywhere you need to keep track of pulse rates. Simple to use and only **\$5.89***. We'll call it the FX 701P.

3

This Keyboard programmed **Multi-step Timer** even drives LEDs directly. At **\$6.90*** WD55 is our latest opportunity chip.

* 100 up price +15% sales tax

If you've got an idea that needs a little silicon lubrication to get it moving . . . we'd like to chip in.



daneva control pty. ltd.

70 Bay Road, Sandringham, Vic., 3191. Ph: 598-9207. Telex: AA34439
AGENTS: Sydney: 51-5880, Adelaide: 42-6666, Brisbane: 36-5183.
ACT: 82-4995, Perth: 325-2444, Hobart: 44-1337, N.Z. (63) 85-702.

also available through computer stores and electronic wholesalers

SOANAR

NOW! YOUR MOST RELIABLE SOURCE FOR RESISTORS

Fixed

Carbon Film
Metal Film
Flame Proof
Power
Wire Wound

Potentiometers

Slide
Rotary
Trim
Cermet
Switched
Ganged

Rheostats

Wire Wound
Metal Glaze

Readily Available
Throughout Australia.

Technical Information available on request.

SOANAR

SOANAR ELECTRONICS PTY.LTD.

A MEMBER OF THE A+R-SOANAR ELECTRONICS GROUP
30 Lexton Road, Box Hill, Vic., 3128, Australia. Telex: 32286.







VICTORIA: 89 0661
N.S.W.: 789 6733
Sth. AUST.: 51 6981
QUEENSLAND: 52 5421
WEST. AUST.: 381 9522

Beryllium — how dangerous?

Beryllium compounds are insidious poisons — they can lie in the body for up to five years before showing any effects — and they can kill. Have you any beryllium in your junk box?

BERYLLIUM COMPOUNDS ARE QUITE SAFE — PROVIDING THEY'RE LEFT WELL ALONE

DO NOT: grind, saw, put with acid, crush, chip, file, brush or vacuum the material!

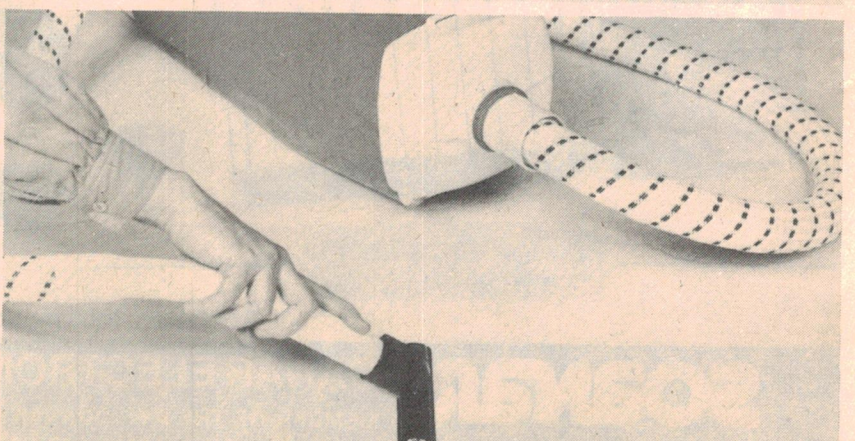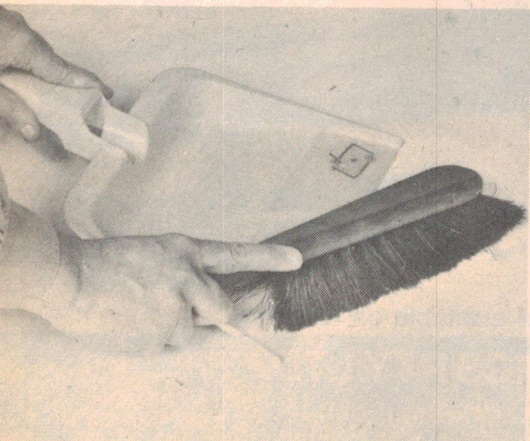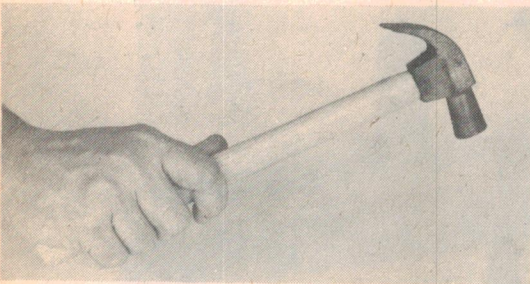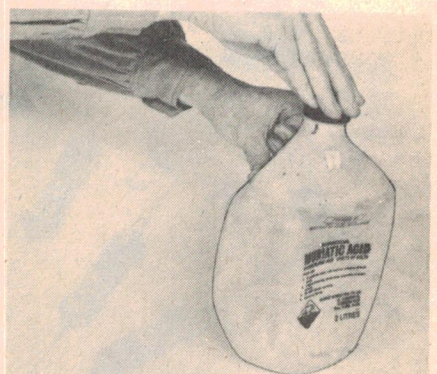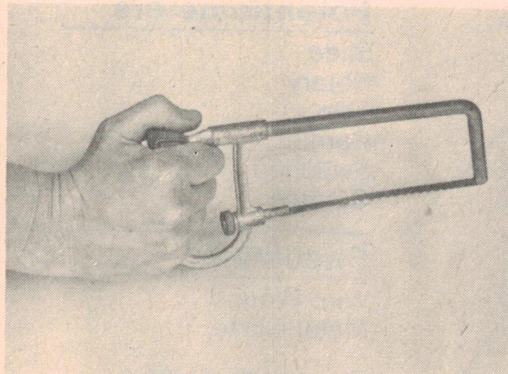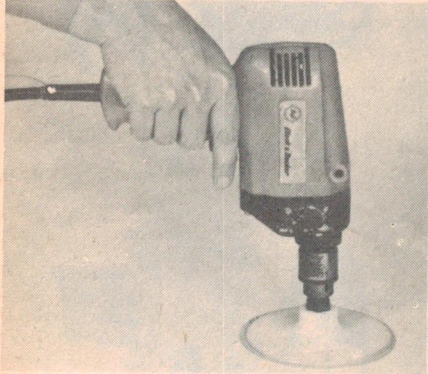

THERE IS a lot of controversy these days about the toxic effects of everyday substances — saturated hydrocarbons in food, cancer-producing hair dyes, lead in petrol and so on.

It may surprise you to know that you are in contact with one very toxic substance which has cost the lives of many people over the years and which may have no warning notices or labels attached to it — it's harmless in its present form, but is only waiting for the unwary to tamper with it to turn it into a deadly cancer-forming agent.

The substance is beryllia, long used for its low thermal conductivity and high electrical insulation resistance in applications such as RF power transistors and some 'heat sink compounds'.

In its solid state, beryllia (or beryllium oxide, to give it its proper name) is fairly innocuous. It won't explode, give off noxious fumes or even catch fire. But grind or cut it in any way, and the dust formed may produce insidious lung disease. Cases have been reported in which workers who came into contact with the substance did not exhibit symptoms until five years later, and some in which the damage appeared within one or two months.

It doesn't take much dust to produce toxic effects, either. Some forty years ago, beryllia was used widely in fluorescent lighting tubes, and the number of cases of poisoning were much greater. Because of the incredible virulence of the poison, toxic effects have been reported in people who visited the homes of beryllium workers. Tests have been carried out with soiled clothing that showed that shaking even a lightly-soiled lab apron can give rise to dust concentration five times the recommended maximum.

Imagine, then, the effect of sawing a piece of beryllia in your workshop (or, worse still, in your kitchen). The worst of it is, you may not realise the effects until five years from now.

Having said all that, solid beryllia is safe enough if treated with respect.

- If there is an alternative, don't use beryllium compounds.
- Don't ever mutilate, grind, cut or even scratch beryllia.
- Always make sure that any beryllia you have is adequately labelled in such a way that there is no way that you, or anyone else, can mistake it for something harmless.
- When you want to throw out a device containing beryllia (which you probably feel like doing round about now), send it back to the manufacturer — it's pretty certain that they know how to dispose of it properly.


There is another route through which beryllia can be harmful — through the skin. Experiments with animals have shown that introducing beryllium compounds into open wounds may form tumours. If you're using a heat-sink compound that you think contains beryllia, try not to touch it — use plastic gloves and other safety devices.

If you think that beryllia has come into contact with you in any way which could prove harmful — see your doctor.

BIBLIOGRAPHY

QST magazine (ARRL journal), issue July 1978, page 37, "How Safe is Your Ham Shack?" - part 2.

- 1) Physical Design of Electronic Systems, Bell Telephone Laboratories, Vol 3, 1971.
- 2) Dangerous Properties of Industrial Materials, N. I. Sax.
- 3) NIOSH Registry of Toxic Effects of Chemical Substances, Vol 2, 1977.

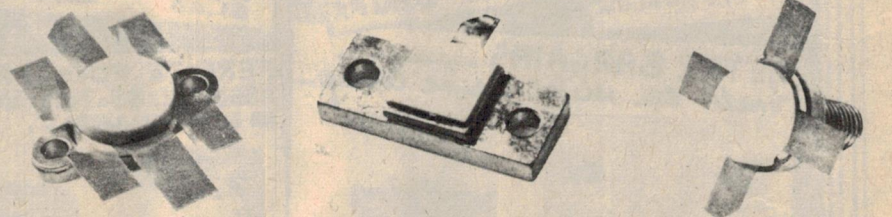

Some of the fairly common types of devices constructed using Beryllium oxide are shown above. RF power transistors use the material as a heat transfer material between the chip and the copper stud. Stripline terminations — such as the central device in the upper group and the central device in the lower row — are less common but have construction similar to the RF power transistors. These devices are perfectly safe to handle providing you do not do any of the things suggested in the pictures on the opposite page.

BERYLLIUM OXIDE, BeO (*Beryl, Beryllia, Bromellite*) PHYSICAL, CHEMICAL AND MEDICAL CHARACTERISTICS

VOLUME RESISTIVITY: 6×10^{11} ohm.m at 300°C (98% BeO)¹

THERMAL CONDUCTIVITY: 210 W/m. °C (98% BeO at 25°C)¹

SOFTENING TEMPERATURE: 1600°C (98% BeO)¹

THERMAL EXPANSION: 6.1 ppm/°C (98% BeO)¹

TOXIC HAZARD RATING: High (acute local irritation, inhalation: may cause death or permanent injury after very short exposure to small quantities)²

LOWEST TOXIC AIR CONCENTRATION: 49 mg/m³ (rat, inhalation, four weeks continuous. Cancer)³

LOWEST TOXIC UNDER-SKIN DOSAGE: 7 mg/kg (pig, benign tumour)³

OSHA STANDARD AIR CONCENTRATION: 2 µg/m³ (time-weighted average)³


OSHA STANDARD PEAK AIR CONCENTRATION: 25 µg/m³ (30 min per 8 hours)³

**MOTOROLA
PIEZO HORN
RESPONSE 4K-30K
100W**



**REDUCED
P&P ONLY \$11
\$1.00**

**TELEPHONE PUSH-BUTTON
DIALLER—with MEMORY—
(NOT APPROVED)
FITS INTO MOST
PHONES—
MEMORISE LAST
NO. 10 MINUTES.
2 RECALL BUTTONS.
DATA SUPPLIED**



\$45 P&P \$1.

SPECIAL


FANTASTIC PRICE REDUCTION



**NOW ONLY
\$4.95 TO CLEAR
P&P. \$1**


**SPRING REVERB
UNITS**

Specs: Input current — 350 mA. Driving Coil Impedance — 16Ω. Pick-up coil impedance — 10kΩ. Frequency response — 100 to 3000 Hz. Attenuation — 30 dB. reverberation time — 25 to 30 msec. Dimensions — 253 x 36 x 26mm.



ONLY \$8.50
MASTER INSTRUMENTS
HIGH GRADE PROFESSIONAL
PANEL METER. 100.0-100mA
CENTRE ZERO. SCALE F.S.D. 100mA.
SIZE: 24 MM DIA. HOLE REQ. 22 MM.
P&P. 60c

**AMPHENOL
57 SERIES MICRO
RIBBON CONNECTORS
50 WAY PLUG &
SOCKET —**



**ALMOST
1/2 PRICE \$12 PR**

**MOTOROLA
PIEZO HORN
RESPONSE 2K-30K
150W**



**REDUCED TO
\$21
P&P \$1.00**

**SPRAGUE
COMPUTER GRADE
ELECTROLYTIC CAP'S.**


**Exclusive to us
Genuine
Reduction!!**



P&P \$1 P&P \$2

**160,000uf 10v \$12
100,000uf 10v \$8**

**METER BARGAINS
Grab 'em while they're cheap—**



**DUAL VU
\$2.95**

P&P 60c



**0-1 mA
\$6.50**

**FERRITE POT-CORE
ASSEMBLIES—fully wound
NO DATA AVAILABLE.**



**M74-MB
85c-**



**P&P 40c A75-MB
- 65c**

**Tremendous offer of
POWER SUPPLY
Electros—**



**3300MFD
50V
ALL NEW STOCK
ONLY
FROM US AT
55c
OR 10uf 45c**

**Dicky, anything you can
do— WE can do Better!!**

**ELECTROLYTICS
AT 'SLAUGHTER' PRICES!!**

P.C. MOUNTING	AXIAL LEADS
100/6.3	.06 22/6.3 .05
330/6.3	.15 470/6.3 .20
2200/6.3	.25 3500/6.3 .30
6800/6.3	.30 10000/6.3 .50
47/10	.12 220/10 .15
100/10	.15 230/10 .16
470/10	.20 1000/10 .20
22/16	.10 33/16 .12
330/16	.16 470/16 .25
470/16	.25 1000/16 .40
2200/16	.55 2200/16 .50
10/25	.12 2.2/25 .10
47/25	.14 10/25 .12
10/100	.20 33/100 .24
23/100	.24 47/100 .26
100/100	.30 1000/100 .50


**WE HAVE 1/2 MILLION ELECTROS
IN STOCK—PLEASE SEND FOR
FULL LISTS— SAE PLEASE**

**S.C.R.
100V 8AMP
ONLY
50c
CRAZY.N**

**MODEL MOTOR
60R 12VDC.
WITH INBUILT
SPEED REGULATOR**



**GENUINE BELLING-LEE
12 WAY TERMINAL BLOCKS
RATING .15A. GRAY PVC.**




UNDER 1/2 PRICE 75c

**99c
TO CLEAR**

**C & K MINI-
P.C. MOUNTED TOGGLE SWITCH**

**7301/A 7201/A 7103/A
3POLEDT DPDT SPDT**



\$2.00 \$1.25 95c

**CLOCK MODULE—12 HR 240VAC
COMPLETE WITH OPERATING DATA
TRANSFORMER. 0.6" DISPLAY
BUZZER ALARM SIMPLE SWITCHING
POWER FAILURE
INDICATOR—
SECONDS DIS-
PLAY ON
COMMAND—
NOW ONLY P&P \$1.50**




\$13.50

**WELCOME
BANKCARD HERE—**

**SHERIDAN
ELECTRONICS PTY. LTD.**

**164-166, REDFERN STREET,
REDFERN. N.S.W. 2016. AUST.
P.O. BOX 156, REDFERN. N.S.W. 2016.
PHONES: 699-5922 OR 699-6912.**

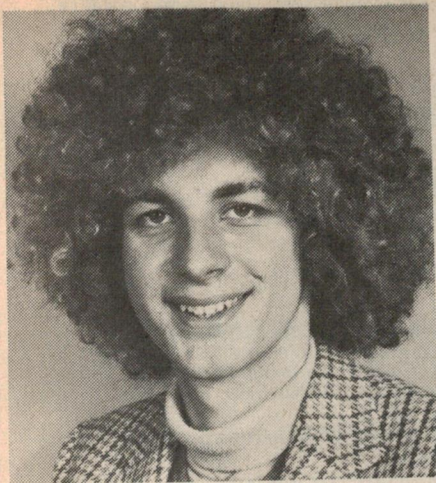

Jonathan Scott

CONFESSES being born in Brisbane in 1956 — claims British descent in compensation. Beats us too, but it's always a good start for an argument!

His first exposure to technology was an electric train set, ostensibly bought for him. This was a bit odd as he was only 2.5, but daddy was surprisingly helpful. Jonathan could wire the points when he was three and was allowed to drive it when he was four. The error

rate in this early electrical work has resulted in a sense of smell that can pick an overheated solenoid at 400 metres and a sense of hearing that can get the bearing of a short circuit to within 3°.

Jonathan was educated at a Sydney GPS school which "turned out lousy human beings, but great assassins", and hence it doesn't rate a free plug here. By now the electrical fetish, mutated into electronic obsession, was blooming into radio amateurhood. Having hated every second spent at school, the attraction of Sydney University's vast reserves of CROs, computers, girls, bars, concerts, girls, colleges, plays, girls, interesting lectures, clubs, societies and girls came as a welcome opportunity to expand his interests. Amazingly, between all this a BSc in Physics was squeezed from the system in 1976.

After this, Jonathan went to live in Wesley College (the only co-ed one on SU campus), to get closer to the action, figuring that one hour per day spent commuting is an intolerable inefficiency to any perfection-minded engineer. Two years later, a BE (Hons) popped up, which would have been great had it not heralded the threat of having to get a full time job! Here, ETI came to the rescue, and in 1979

Jonathan could be found taking refuge from the hard labours of the outside world in their hallowed lab.

Having taken up residence in a share-house (with a female economist, a female lawyer, a PhD and a policeman — just to keep him on his toes) everything looked stable. Alas, the establishment made him an offer he couldn't refuse — money. Not a lot, but it was going cheap; free in fact, in exchange for a Masters degree in Pure Electronic Design. So now he may be seen frequenting SU in the day, ETI at all sorts of times, and various places of raging in between.

Star sign: Taurus = Leo

Likes: Building better electronics, photography, girls, ergonomics, strategic games, timepieces, motorbikes, rock (heavy), Monty Python, Hewlett-Packards (symbols of perfection in engineering), food (especially Italian), cars (German and Italian), skiing, squash, and winning.

Dislikes: Imperfection, inefficiency, ordinary, unspectacular and boring things; slow people.

Quotes: "Between the women, the cars and the food, I should have been born Italian"; "If you can build a better one, the builder of this one hasn't got an excuse in Hell!"

All you ever wanted to know about ETI . . . but were afraid to ask

David Tilbrook

BORN in Sydney as a young lad (circa 1954), David lived here until a move to Adelaide forced him to live there. At the ripe old age of eight he built his first electronic device — a profoundly complex gadget consisting of two switches (240 V light switches — off the bedroom wall), a 3 V torch globe (from his father's torch) two giant 1.5 V batteries and fuse wire for hookup cable. He learned very quickly about short circuits! It wasn't long before he progressed to crystal sets, doorbells and various concoctions he still can't fathom!

Extradited to Sydney in 1964 he was thrust into St Pius' College at Chatswood who steered him through his Higher School Certificate . . . they had to get rid of him somehow!

Leaving the cloistered shadows of St Pius', David progressed to servicing pinball machines — the experience was good for him for he developed a healthy disrespect for electromechanical things.


From this highlight in David's career it was only natural that he study electronics at university. He refuses to say which one and none will admit having him . . .

At the end of his first year David secured a job as a laboratory technician testing coal and mineral samples at Casco. He relates that it was thus even more discouraging when chemistry proved his downfall at university.

To expunge his sins he took up servicing electronic equipment (car radios, transistors and stereos), this being more fun than servicing electromechanical equipment. Finding this marginally better than pinball machines, David soon left to join Convoy International where he rose to fame and fortune . . . well, notoriety and a modest income, anyway.

His interest in hi-fi had been kindled many years before and he found working on top-quality equipment (Nakamichi, B & O, Teac, Electrosonic A/V gear . . .) a stimulating experience. After several years he was appointed Service Manager at Convoy which, among other things (washing coffee cups, answering the 'phone) involved designing equipment for audio-visual applications.

Following those happy years at Convoy, David spent some time doing freelance electronic design. Amongst

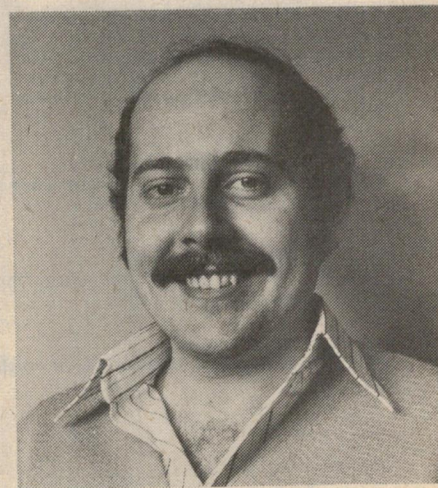

other things, he worked on animating monsters using electronic control.

We found David supporting a telegraph pole in a back street of Woolloomooloo. Being in a charitable mood that week we took him in, thrust him through the lab door and said: "go to it!" And he did. His cunning circuits now grace the pages of ETI. Star sign: non-Leo. (Aquarius)


Likes: sophisticated audio gear, physics, good loudspeakers, tennis, astronomy, cunning circuits, pre-1975 Toranas. Dislikes: pre-1975 Holden Toranas!, bad loudspeakers, poor electronic design, low-fi audio gear, chemistry, salesmen and mechanical contrivances.

Quotes: "If it takes more than 10 amps, I don't want to know about it!"

New digital multimeters that work the way you do.

You do your job as well as it can be done. Now there's a line of digital multimeters from Beckman that does the same. A new generation of 3½-digit multimeters a step above all other digital and analog multimeters. We've combined the best of both to give you useful and easy-to-use features found in no other multimeter.

BECKMAN

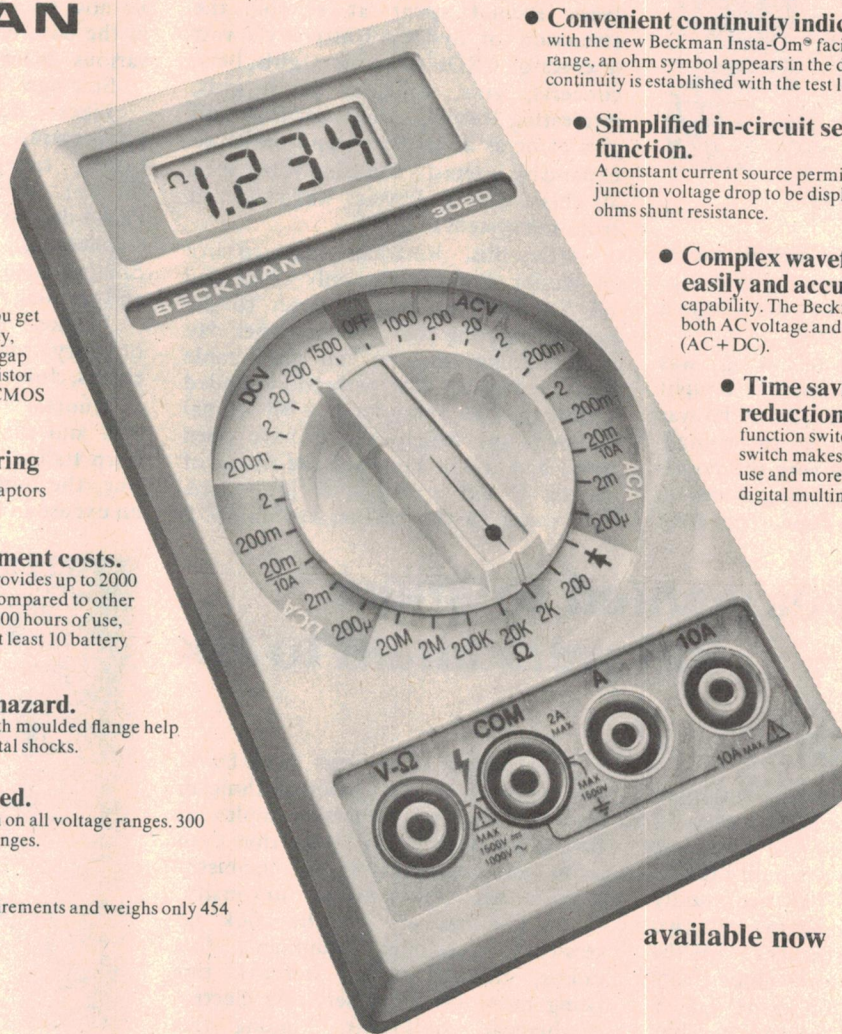

- **Reliability you can depend on.**

Whichever model you choose, you get long-term accuracy and reliability, assured through the use of band-gap reference elements, thin-film resistor networks and custom-designed CMOS LSI chips.

- **10 Amp AC/DC measuring capability**

without special adaptors (Models 3010, 3020, 3030).

- **Save on battery replacement costs.**

Common 9V transistor battery provides up to 2000 hours of continuous operation. Compared to other multimeters with no better than 200 hours of use, Beckman multimeters save you at least 10 battery replacements.

- **Reduce operator shock hazard.**

New safety designed test leads with moulded flange help protect the operator from accidental shocks.

- **Your investment protected.**

1500 Vdc or 1000 Vrms protection on all voltage ranges. 300 Vdc or rms AC on all resistance ranges.

- **Easy to carry and use.**

It's free from external power requirements and weighs only 454 grammes.

- **Convenient continuity indication** in a DMM with the new Beckman Insta-Om[®] facility. In any resistance range, an ohm symbol appears in the display the instant continuity is established with the test leads.

- **Simplified in-circuit semi-conductor test function.**

A constant current source permits actual semi-conductor junction voltage drop to be displayed with as little as 200 ohms shunt resistance.

- **Complex waveforms measured easily and accurately** with True RMS capability. The Beckman RMS 3030 measures both AC voltage and AC current in True RMS (AC + DC).

- **Time saving and error reduction** with single centre function switch. One single centre switch makes the instrument easier to use and more reliable than push-button digital multimeters.

available now

Featuring new continuity function.

Model RMS 3030 0.1% Vdc accuracy	\$199
Model 3020 0.1% Vdc accuracy	\$179
Model 3010 0.25% Vdc accuracy	\$139
Model TECH 300 0.5% Vdc accuracy	\$115

All prices subject to 15% S.T. where applicable


A full range of accessories is available.



WARBURTON FRANKI

• ADELAIDE 356-7333 • BRISBANE 52-7255 • HOBART 23-1841
• MELBOURNE 699-4999 • PERTH 277-7000 • SYDNEY 648-1711

WF653/79

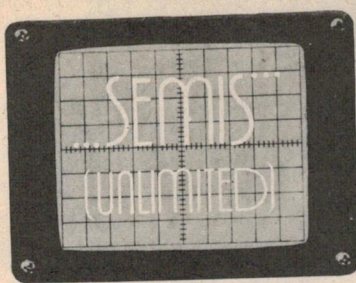

MORE FOR YOUR DOLLAR

NOW IN AUSTRALIA

A NEW CONCEPT IN DIRECT MAIL ORDERING
— NO COUNTER SALES MEAN MUCH LOWER PRICES

SPECIALS: 10 x 100K C 45mm Slide Pots \$2; 10 x 50K C Rotary Pots \$2; 10 x Isostat 3-Pole Switches \$2; 10 x Rocker Switches 3-Pole \$2. (All plus 27½ percent tax).

Mail all orders to: SEMIS, 2 Guildford Lane, Melbourne. Vic. 3000.

All components prime, full spec, by major manufacturers

LINEAR

LM301	.25
LM304H	1.40
LM305H	.65
LM307CN	.32
LM308	.60
LM310N	1.75
LM311	.55
LM318	2.25
LM324N	.65
LM334Z	1.10
UA339PC	.50
LM349N	1.45
LF356	.90
LF357N	.90
LM358N	.60
LM370N	2.50
LM373N	3.30
LM380	.85
LM381N	1.50
LM382N	1.30
LM386N	.90
LM387N	1.10
LM391N	1.40
LM393AN	.70
555	.25
555	.60
LM565CN	1.10
LM567CN	1.20
TBA641-BX1	2.00
LM709-CN	.50
UA710CA	.55
723	.40
LM723CH	.54
LM733CN	.75
741	.20
UA747PC	.85
LM748CN	.45
LM1458N	.50
LM2902N	1.20
LM3039H	.78
CA3065	.50
CA3130	1.05
CA3140T	1.05
UA3401	.60
LM3900N	.65
LM3909N	.85
LF13741N	.50
LF13741H	.50

TRANSISTORS

2N301	1.80
2N1711	.45
2N2219A	.35
PN2222	.18
2N2222	.20
2N2646	.55
2N2647	.90
2N2904	.40
2N2905	.35
2N2906	.30
2N2907	.25
2N3053	.35
2N3054	.60
2N3055	.45
2N3563	.18
2N3564	.25
PN3566	.18
PN3567	.18
2N3568	.18
2N3569	.18
2N3638	.18
PN3638	.18
2N3638A	.21
PN3642	.16
PN3643	.16
PN3644	.16
PN3645	.16
2N3646	.16
2N3694	.20
2N3702	.25
2N3704	.25
2N3819	.25
2N3904	.18
2N3906	.16
2N4032	.45
2N4033	.80
2N4250	.12

2N5458	.40
2N5459	.40
AC127	.80
AC128	.60
AC187	.65
AC188	.65
AD149	1.60
AD161	1.35
AD162	1.35
AY6112	.40
AY6119	.40
AY6120	.40
AY6121	.40
AY8117	.40
AY9139	.40
BC107	.18
BC108	.18
BC109	.18
BC147	.10
BC177	.20
BC178	.20
BC179	.20
BC547	.12
BC548	.12
BC549	.12
BC557	.14
BC558	.14
BC559	.14
BD137	.35
BD138	.35
BD139	.26
BD140	.26
BD234	.41
BD237	.47
BF115	.45
BF173	.60
BF180	.35
BF198	.10
BF199	.26
BSV17	.65
BU126	2.45
BUX80	6.75
FT2955	1.15
FT3055	.65
MEL12	.75
MJ802	2.95
MJ2955	.60
MJE2955	1.20
MJE3055	1.20
VPF102	.35
MPSA05	.18
MPSA14	.24
OA675	.10
OC910	.60
OC912	.60
OC925	.10
SE1010	.18
TIP31A	.40
TIP32A	.40
2SD200	1.00
TJ2955	.70
TIP3055	.65

TTL 7400 SERIES

7400	.14
7401	.16
7402	.14
7403	.18
7404	.16
7405	.20
7406	.18
7407	.16
7408	.16
7409	.20
7410	.14
7411	.22
7412	.26
7413	.28
7414	.32
7416	.40
7417	.40
7420	.16
7421	.16
7423	.16
7426	.24
7427	.24

7430	.16
7432	.24
7437	.30
7438	.30
7440	.20
7441	.35
7442	.35
7443	.65
7444	1.20
7447	.50
7448	.18
7450	.18
7451	.20
7453	.20
7454	.18
7470	.35
7472	.30
7473	.25
7474	.25
7475	.25
7476	.25
7480	.60
7485	.85
7486	.36
7490	.24
7491	.50
7492	.26
7493	.26
7494	.80
7495	.35
74107	.36
74121	.60
74122	.60
74123	.30
74126	.50
74132	.75
74145	.80
74151	.65
74153	.65
74154	.65
74157	.45
74160	.60
74165	.55
74175	.75
74192	.65
74193	.65
74221	.75
74365	.75
74367	.55

CMOS

4000	.20
4001	.18
4002	.18
4006	1.05
4007	.20
4008	1.00
4009	.65
4010	.65
4011	.18
4012	.18
4013	.42
4014	1.00
4015	1.00
4016	.41
4017	1.05
4018	1.00
4019	.52
4020	1.05
4021	1.05
4022	1.05
4023	.70
4024	.18
4025	.18
4026	1.55
4027	.60
4028	.78
4029	1.10
4030	.33
4040	.95
4041	.80
4042	.80
4043	.85
4044	.85
4046	1.30
4049	.40
4050	.40
4051	.70

4052	.70
4060	1.30
4066	.65
4068	.18
4069	.18
4070	.27
4071	.27
4072	.27
4073	.27
4075	.27
4077	.27
4078	.27
4081	.27
4082	.27
4093	1.30
40174	1.05
4510	1.05
4511	1.05
4518	1.05
4519	.65
4520	1.05
4541	1.30
4560	2.60
74C00	.22
74C01	.22
74C04	.22
74C08	.22
74C10	.22
74C14	.40
74C20	.25
74C30	.25
74C32	.25
74C48	1.40
74C73	.65
74C74	.65
74C76	.65
74C83	.25
74C85	1.10
74C90	.85
74C93	.85
74C95	.60
74C107	.60
74C151	2.40
74C151	1.50
74C160	.80
74C162	.80
74C175	.80
74C192	1.10
74C193	1.10
74C195	.90
74C221	1.30
74C373	1.60
74C901	.50
74C902	.50
74C907	.50
74C925	.40
74C927	4.10
80C95	.60
80C97	.60
80C98	.60

TTL 74LS SERIES

74LS00	.15
74LS01	.20
74LS02	.15
74LS03	.18
74LS04	.18
74LS05	.18
74LS09	.18
74LS10	.18
74LS11	.18
74LS14	.70
74LS20	.18
74LS21	.18
74LS22	.22
74LS26	.28
74LS27	.18
74LS28	.30
74LS30	.22
74LS32	.22
74LS33	.32
74LS37	.30
74LS38	.30
74LS40	.18
74LS42	.75
74LS51	.25
74LS54	.25
74LS55	.25
74LS73	.50

74LS74	.40
74LS75	.45
74LS85	.95
74LS86	.35
74LS90	.45
74LS92	.80
74LS93	.65
74LS107	.35
74LS109	.35
74LS112	.35
74LS123	.90
74LS125	.55
74LS126	.55
74LS132	.80
74LS138	.80
74LS151	.60
74LS154	1.20
74LS157	.60
74LS163	.70
74LS174	.60
74LS175	.60
74LS190	.95
74LS192	.70
74LS193	.70
74LS196	.90
74LS221	.90
74LS257	.50
74LS365	.55
74LS366	.55
74LS367	.55
74LS368	.55
74LS374	1.40

S.C.R.

C106Y	.30
BT100A300R	.50
C106D1	.50

DIODES

1N914	.04
1N4001	.06
1N4004	.06
1N4007	.12
1N5625	.35

ZENER DIODES

400mw 3.3v to 36v	.12
1 watt 3.3v to 36v	.20

VOLTAGE REGULATORS

309	1.10
317	2.10
7805	.70
7806	1.00
7808	1.00
7812	.70
7815	1.00
7824	1.00
7912	1.10
7915	1.10
78L05	.35
78L12	.35
78L55	.35
79L05	.60
79L12	.60
79L15	.60

OPTO

FND 507	1.40
FND 357	1.00
FND 500	1.00

STANDARD LEDS

RED	.12
GREEN	.20
YELLOW	.25
CLIPS	.02

MICROS

2102	1.20
2114	4.95
2708	10.00

PCB MOUNT

1 uf 50 V	.07
22 uf 25 V	.07
47 uf 63 V	.07
1 uf 6.3 V	.07
1 uf 50 V	.07
1 uf 63 V	.07
2 uf 10 V	.07
22 uf 16 V	.07
2.2 uf 35 V	.07
2.2 uf 50 V	.07
3 uf 300 V	.12
3.3 uf 16 V	.07
3.3 uf 25 V	.07
3.3 uf 50 V	.07
4.7 uf 10 V	.07
4.7 uf 25 V	.07
4.7 uf 250 V	.12
4.7 uf 315 V	.12
5 uf 3 V	.07
5.8 uf 10 V	.07
10 uf 16 V	.07
10 uf 25 V	.07
10 uf 120 V	.12
22 uf 25 V	.10
22 uf 50 V	.10
22 uf 120 V	.12
22 uf 250 V	.19
25 uf 25 V	.10
25 uf 63 V	.12
25 uf 300 V	.15
33 uf 6.3 V	.07
33 uf 10 V	.07
33 uf 25 V	.07
33 uf 50 V	.12
33 uf 160 V	.19
33 uf 200 V	.19
33 uf 250 V	.19
47 uf 6.3 V	.07
47 uf 10 V	.09
47 uf 16 V	.09
47 uf 25 V	.10
47 uf 63 V	.12
80 uf 10 V	.09
80 uf 16 V	.12
100 uf 3 V	.07
100 uf 6.3 V	.07
100 uf 10 V	.09
100 uf 16 V	.12
100 uf 25 V	.15
100 uf 63 V	.18
150 uf 3.15 V	.07
200 uf 6.3 V	.12
200 uf 10 V	.12
200 uf 12 V	.12
200 uf 15 V	.18
220 uf 6.3 V	.18
220 uf 10 V	.12
220 uf 16 V	.14
220 uf 25 V	.15
220 uf 35 V	.19
220 uf 50 V	.23
220 uf 63 V	.23
330 uf 10 V	.15
470 uf 16 V	.19
470 uf 25 V	.19
470 uf 35 V	.31
500 uf 10 V	.15
500 uf 16 V	.19
1000 uf 6.3 V	.19
1000 uf 10 V	.19
1000 uf 16 V	.22
1000 uf 18 V	.22
1000 uf 25 V	.30
1000 uf 35 V	.30
2200 uf 10 V	.30
2500 uf 16 V	.60

RG/RD/RP LUG


TERMINAL

1000 uf 63 V	1.40
1000 uf 100 V	1.60
1500 uf 35 V	.60
2500 uf 35 V	1.10
2500 uf 63 V	1.60
2500 uf 80 V	1.75
3300 uf 50 V	1.60
3300 uf 75 V	2.70
4700 uf 35 V	1.20
4700 uf 100 V	4.20
5600 uf 40 V	1.50
8000 uf 75 V	4.00

Series 4000 moving-coil cartridge preamplifier

David Tilbrook

Designed to complement our popular Series 4000 stereo amplifier, this project features performance equal to, or better than, top quality commercial preamps currently available.

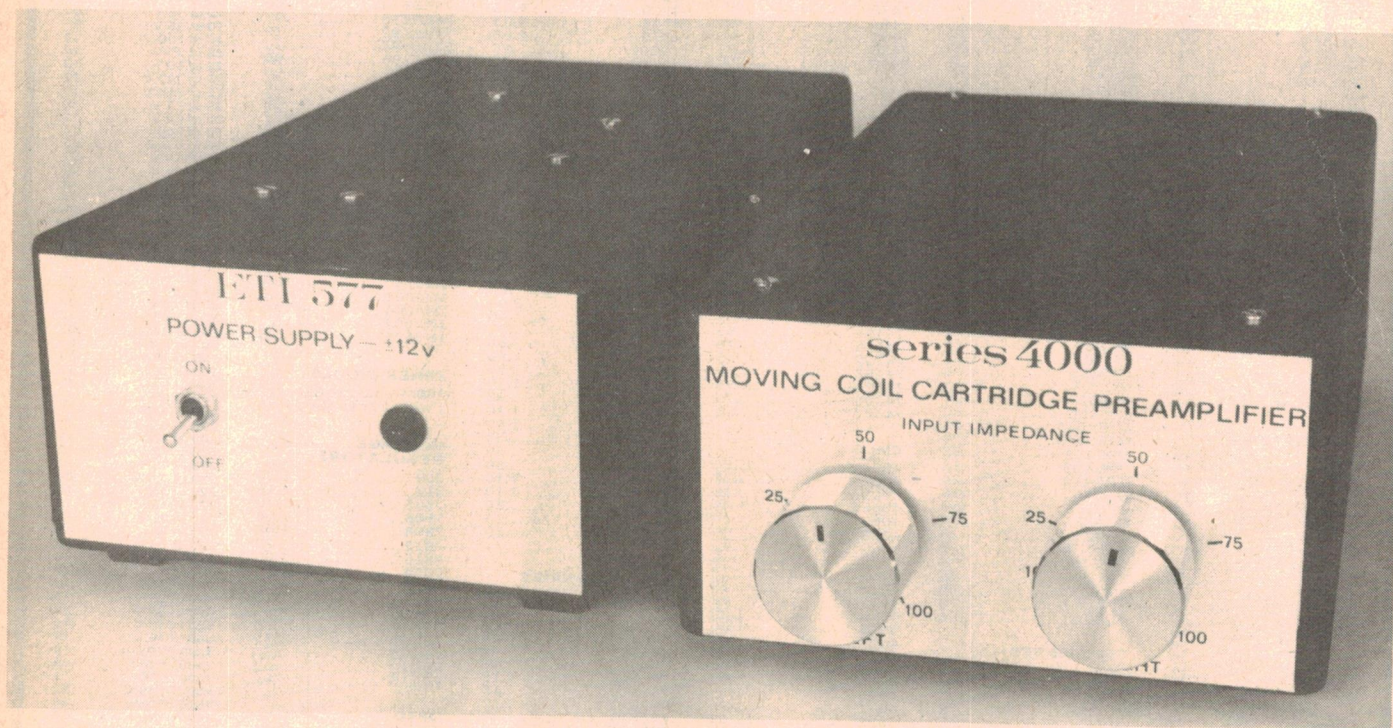

OVER THE LAST several years there has been a dramatic increase in the number of moving coil cartridges released. The design of this type of cartridge results in a number of advantages over the more usual phono cartridge which works on a moving magnet principle.

Modulations on the wall of the record are tracked with a diamond stylus attached to a long arm called a cantilever. In the moving-magnet cartridge a small magnet is attached to the cantilever so that stylus movement causes movement of the magnet. Two pick-up coils are mounted close to the

magnet so that the windings of the coils intersect the lines of magnetic flux from the magnet. As the stylus moves the magnetic flux seen by the pick-up coils varies in direct proportion to the stylus movement, and small electrical signals are generated in the coils.

The moving-coil cartridge works in a similar way but inverts the roles of the pick-up coils and magnet. The magnet assembly is held stationary while the pick-up coils are mounted on the cantilever assembly and move with the stylus modulations (hence the name 'moving coil').

The pick-up coils are reduced

drastically in size and weight compared to the coils used in moving magnet cartridges. This results in a total cantilever weight that is much smaller than in the typical moving magnet cartridge. Since the weight is greatly reduced the ability of the stylus to react to transients is increased and an overall improvement in signal accuracy results. Moving coil cartridges generally have superior frequency response characteristics and improved phase response at high frequencies. But they also have disadvantages.

The small pick-up coils have a very low impedance resulting in much lower

signal levels than available from normal phono cartridges. In fact, the voltages present on the typical moving-coil cartridge at a recording velocity of 10 cm/sec can be in the order of 150 μ V! This is generally insufficient to drive an amplifier to anything like full power. Furthermore, since the output level is some 30 dB below that expected by the amplifier then a great reduction in the signal-to-noise ratio will result. An amplifier with a short circuit signal to noise ratio of 80 dB for example, which is quite a good figure, will end up with a signal noise ratio of about 50 dB — which is distinctly *bad*.

The internal impedance of moving-coil cartridges is around 5 ohms and to achieve the low recommended load impedance required it is clearly not satisfactory to simply load down the input of the average phono input with a resistor since this does nothing to overcome the signal-to-noise ratio problems.

The solution to these problems is to insert some voltage gain between the output of the cartridge and the phono input. This can be done in two ways. Firstly, it is possible to use a transformer to boost the voltages up to the desired level and they are capable of very good results. But, transformers are still limited in transient performance and noise. To obtain the necessary voltage gain the turns ratio must be relatively high. Since the impedance ratio is related to the square of the turns ratio, the output impedance must, of necessity, be high also — usually around 30 k for a 50 Ω input impedance. This is substantially higher than the output impedance of normal phono cartridges and degrades the noise figure of the phono input stage. A solution to this is to use a pre-amplifier instead of a transformer to achieve the necessary voltage gain.

Preamp requirements

Preamplifiers have their disadvantages also. The biggest problem by far is the design of an extremely low noise input stage with the correct input impedance to load the cartridge according to the manufacturers' recommendations. The distortion must be kept to a minimum and the frequency response should be as flat as possible. These design goals are not unique to a moving coil cartridge preamplifier but they are difficult to achieve owing to the very low output voltage of the moving coil cartridge.

The required low input impedance can be achieved in several ways. Firstly, we can make the input stage a common

SPECIFICATIONS — ETI 473 moving coil cartridge preamp.

Gain	28 dB (x 25 approx).
Frequency response	29 Hz to 48 kHz \pm 1 dB.
Input impedance	Adjustable 3.3 to 100 ohms.
Noise	Total equivalent input noise 0.3 nV/Hz. Over a 20 kHz noise bandwidth—42nV. Signal-to-noise ratio, with respect to an input level of 150 μ V: -71dB.
Total Harmonic distortion.	With respect to an input level of 0.2mV, unmeasurable (below noise). Calculated to be 0.0015% (see text). Rising to 0.015% for a 30 mV input signal at 1 kHz.
Channel separation	Better than 61 dB.
Input overload margin	better than 80 dB.

base configuration. In this type of circuit the input is connected to the emitter of the transistor so that the input impedance is determined by the emitter resistor in parallel with the base-emitter junction of the input transistor, which can be quite low. However, this does not solve the problem of input stage noise.

The other possibility, and the one I elected to use in this design, is common emitter configuration. The impedance of the base-emitter junction of a bipolar transistor is a function of the amount of current flowing in the emitter of the transistor. This will be largely determined by the collector current and not by the base current, which will contribute only a small amount of the total emitter current. A study of base-emitter turn-on characteristics shows that the impedance of the base-emitter junction is approximately equal to:

$$\frac{26\beta}{I_e \text{ (mA)}}$$

where ' β ' is the small signal current gain of the transistor.

and ' I_e ' is the current in the emitter of the transistor in mA.

So, to reduce the input impedance of the first stage it is simply necessary to increase the emitter current. But this increases the current density in the input transistors, increasing the noise generated by the input stage.

To understand why this happens it is necessary to look more closely at the causes of noise.

Noise

There are two main sources of noise in transistors: shot noise and 1/f noise. Shot noise is the main cause of noise at middle and high frequencies and is generated when an electron attempts to cross a potential barrier. It is therefore directly related to the amount of charge flowing in the device. More specifically, it is given by the equation:

$$I_s^2 = 2qI_{dc}B \text{ (amps)}^2$$

(mean shot noise current)

where 'q' is the charge of an electron, in coulombs

' I_{dc} ' is the dc current in amps and 'B' is the noise bandwidth in Hz.

1/f noise has a random amplitude like shot noise but its spectral density has a 1/f characteristic. This means that the noise amplitude increases as frequency decreases and becomes the dominant source of noise at low frequencies. As with shot noise, its equation reveals that it is directly related to the current flowing in the transistor.

$$I_f^2 = K \frac{(I_{dc})^a}{f} B$$

where ' I_{dc} ' is the dc current in amps 'K' and 'a' are constants that are a function of the particular device


'f' is the frequency in Hz

and 'B' is the noise bandwidth.

Notice that as I_{dc} is increased, so too is the 1/f noise (I_f^2)

It is clear from this that, in order to keep noise generated by shot and 1/f noise to a minimum, it is necessary to keep the current density in the input stage low. But, as we saw earlier, to obtain the necessary low input impedance we have to increase the emitter current. The solution to this is to use several transistors in parallel to form the input device. This decreases the current density in each of the transistors since the necessary emitter current can be shared by all of the input devices. It also places the impedances of the base-emitter junctions in parallel, further decreasing the input impedance of the first stage. Furthermore, since each transistor is a completely independent noise generator their noise voltage will tend to reduce each other (a process too complex to examine in detail here).

Project 473

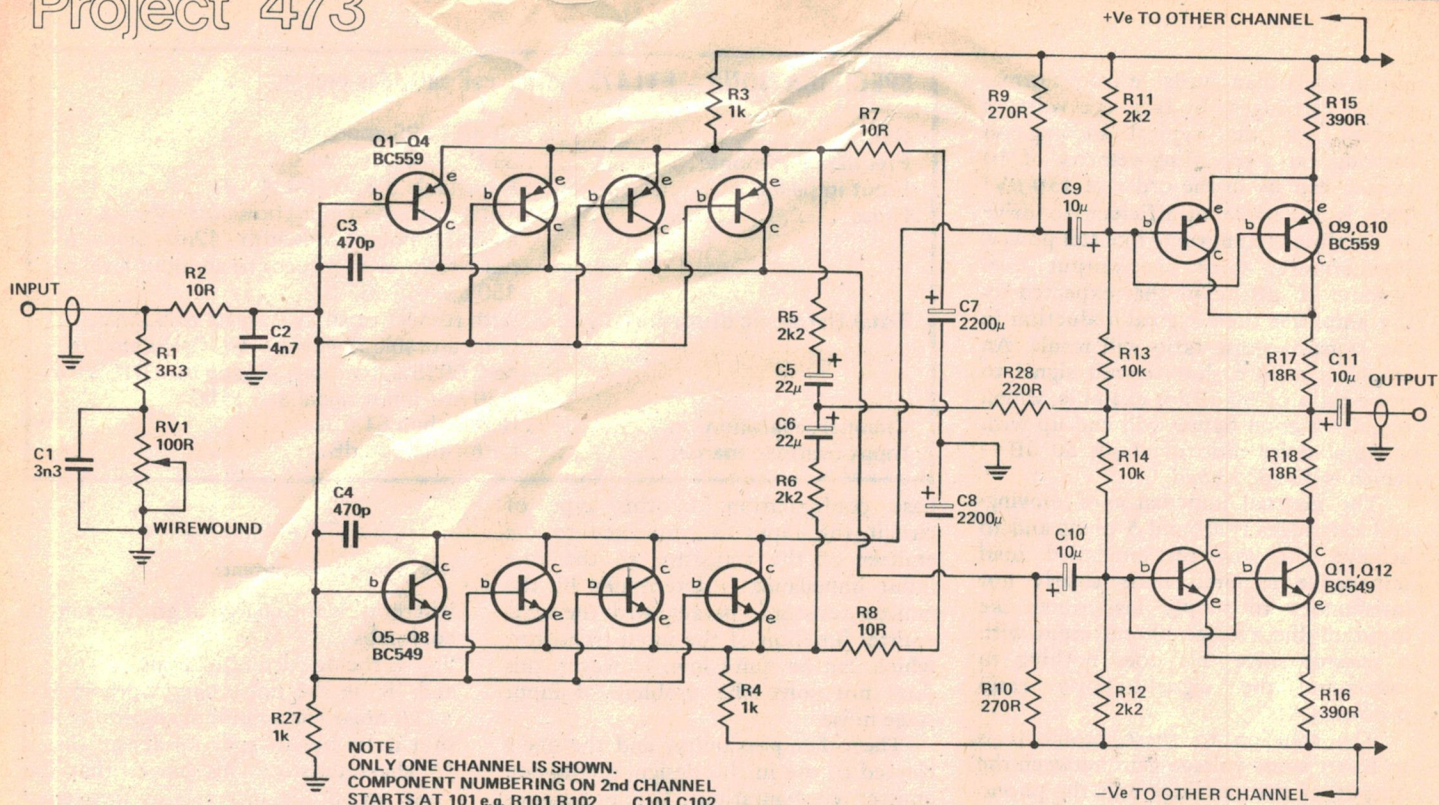

HOW IT WORKS – ETI473

The input stage consists of Q1 to Q8 plus associated circuitry. Q1 to Q4 and Q5 to Q8 are in parallel to reduce the current density providing a low input impedance stage having very low noise. A detailed account of how this works is given in the text.

Capacitor C1 and C2 fix the upper frequency roll-off characteristics as well as shunting the input with the desired load capacitance for the moving-coil cartridge. The configuration of R1 and R2, C1 and C2 was found to give the best loading for a variety of moving-coil cartridges.

The potentiometer RV1 allows the input impedance to be varied over the range most commonly recommended by cartridge manufacturers.

Negative feedback is applied via the network consisting of R28, capacitors C5 and C6 and resistors R5 and R6. Some degenerative feedback for the input stage is applied to the first stage by the

emitter resistors R7 and R8. Capacitors C9 and C10 are coupling capacitors to the second stage while bias for this stage is determined by R11, R12, R13 and R14.

The power supply consists of a series regulator Q13 and Q14. The potential dividers R21/R23 and R22/R24 divide the voltage present at the output of the regulator and drive the transistors Q15 and Q16, and the LEDs. The transistor base-emitter junction in series with the LED will drop 0.6 + 1.65 volts. Therefore, whenever the voltage present at the centre of the potential divider tries to increase above 2.3 volts the transistor increasingly, conducts decreasing drive to the pass transistors Q13 and Q14.

This is a relatively low noise regulator since the voltage reference is LED and not a zener diode which is a noisy device. Resistors R19 and R20, together with capacitors C12 and C13 form 6 dB per octave low-pass filters on the supply rails to further reduce noise that may be generated by the regulated supply. . .

This configuration works very well and the noise levels of this preamplifier rival any of the commercially available units.

To see just how difficult it is to obtain a satisfactory signal to noise ratio at these signal levels it is necessary to look at another form of noise called 'thermal noise'. This is caused by the agitation of charged particles in any conductor due to their temperature. Every passive component will generate thermal noise and short of dunking the

whole thing in liquid helium to cool it off, there is simply no way of getting rid of it. Thermal noise is given by the equation:

$$e_R^2 = 4kTRB \text{ volts}^2$$

where 'T' is the temperature in degrees Kelvin (K).

'R' is the value of the resistance.

'B' is the noise bandwidth

'k' is Boltzmann's constant, equal to 1.38×10^{-23} W-sec/K.

From this equation we can calculate the theoretical noise that will be generated by the moving coil cartridge itself. This clearly is the absolute lowest noise figure that is possible with the input stage generating no noise of its own (which is very unlikely!).


If we let the temperature of the transistor be 300 Kelvin (i.e.: mean atmospheric temperature) and the noise bandwidth be 20 kHz (the hi-fi audio band), then since the dc resistance of the cartridge is about 5 ohms the equation becomes:

$$e_R^2 = 4 \times (1.38 \times 10^{-23}) \times 300 \times 5 \times (20 \times 10^3)$$

$$\text{Therefore } e_R = 4.07 \times 10^{-8} \text{ volts or } 41 \text{ nV.}$$

So, the thermal noise of the cartridge itself is 41 nV.

Actually, this calculation is not quite right since the noise bandwidth is defined as having a 'brick wall' response. An amplifier with 3 dB point of 20 kHz that is falling at a rate of 6 dB per octave will actually have a noise bandwidth much greater than 20 kHz. Furthermore, if we want to be able to quote noise figures to enable comparison between different input stages, it is valuable to quote noise voltages independently of noise bandwidth. This can be done quite easily by dividing the noise voltage by the square root of the bandwidth. The dimensions of this new figure will be "volts per root Hz",

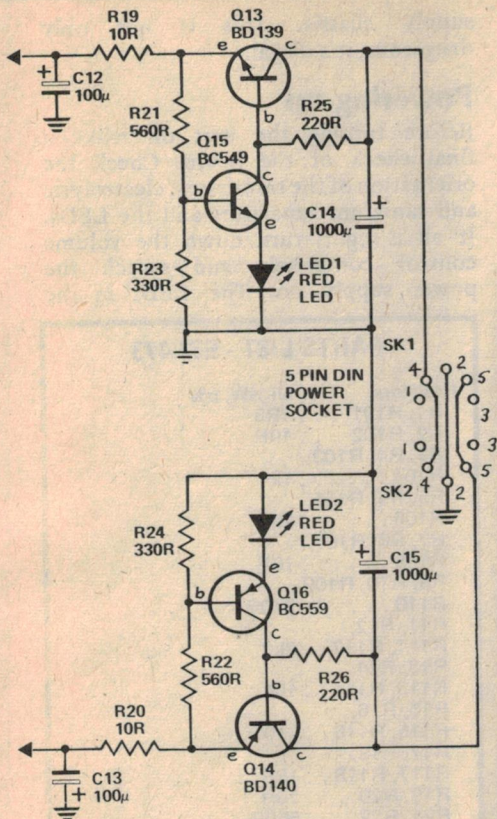

and our result for the thermal noise of a moving coil cartridge becomes:

$$\sqrt{\frac{41}{20\,000}} \text{ nV}/\sqrt{\text{Hz}}$$

or 0.29 nV/ $\sqrt{\text{Hz}}$

Now, if we are aiming at a signal to noise ratio of 70 dB with respect to a signal voltage of 150 nV (0.15 mV), which is the expected signal level at a recording velocity of 10 cm/sec., then the equivalent input noise of the amplifier will be given by the equation:

$$-70 = 20 \log \left(\frac{N}{0.15 \times 10^{-3}} \right)$$

and is equal to 0.33 nV/ $\sqrt{\text{Hz}}$.

The necessary equivalent input noise is in the same order of magnitude as the noise being generated by the cartridge itself!

Designing an input stage with this sort of noise isn't easy, especially when it is considered that the noise generated by even the quietest transistor is in the order of several nV/ $\sqrt{\text{Hz}}$ for usable emitter current. This is substantially worse than the requirement.

Performance features

The total equivalent input noise of this unit was measured at 0.3 nV/ $\sqrt{\text{Hz}}$. With respect to a noise bandwidth of 20 kHz, this corresponds to an input noise of 42 nV, giving a signal to noise ratio with respect to an input signal of 150 nV

(0.15 mV) of 71 dB. At this level, the noise generated by the cartridge itself will be one of the dominant noise sources.

The circuit uses a symmetrical configuration with NPN and PNP transistors set up in such a way that asymmetrical distortions tend to cancel. Normally distortion products are generated differently for positive and negative signal excursions and this tends to produce second harmonic distortion products. The configuration used in this circuit results in very low second and third harmonic distortion. This has enabled a total harmonic distortion figure of around 0.0015% to be obtained.

The problem with quoting distortion figures of this order is that they are too low to be measured directly, being well hidden under the noise level. The only way a figure can be obtained is to remove the overall negative feedback, measure the distortion and then divide by the gain difference when the feedback is reapplied. Unfortunately, feedback does not affect all the distortion products equally, but the figure is still meaningful.

Another advantage of the symmetrical design of the input stage is that it does away with the need for an input capacitor. This is a definite advantage when dealing with low input impedances since the value of the capacitor would have had to be very large to obtain a flat frequency response at low frequencies.

The signal voltages present in the pre-amplifier are naturally extremely low and for this reason the power supply has been kept as a separate unit to reduce the possibility of 50 Hz induction from the power transformer.

A voltage regulator supplies the necessary ± 6 volts. As it is critical to achieve low noise it is important that the regulator does not put noise onto the supply rails which would degrade the noise performance of the unit. Normally the voltage reference used for regulators of this type is a zener diode but, as the zener is reverse biased, it generates a comparatively large amount of noise. In this design an LED was used as the voltage reference. A red LED operated in the forward-biased mode drops a constant 1.65 volts and generates very little noise.

Construction

Construction is relatively straightforward since most components are on the mounted pc board. Other construction methods are possible but performance may not match that of


our prototype.

Mount the resistors and capacitors first, followed by the transistors. Since there are quite a few transistors on the board placed close to each other, don't make the mistake I did and get them mixed up! Cut the necessary lengths of shielded cables and solder them onto the board keeping the ends as short as possible. Solder the necessary lengths of hookup cable to the board and after checking all components mount the board in the chassis.

I used a diecast aluminium box and quite frankly wish I hadn't. The shielding to external magnetic fields really isn't good enough. I found I had to be careful where the preamp was placed or it would pick up hum from the magnetic field produced by the power amp's transformer. Use a steel box if you can, if not, just be careful where it is placed.

Once the board is mounted in the chassis, the pots and rear panel hardware can be mounted and the wiring completed according to the wiring layout diagram shown. Here again I came unstuck. The first system I used to ground the shielded cables caused a monumental hum loop (and I still don't really understand why!). The final method tried is shown in the wiring diagram and this works very well. The shielded cables coming from the outputs on the board have only one of their shields connected to the output RCA sockets which are wired together and connected to the chassis at the ground terminal. This type of terminal is supplied with the necessary hardware to insulate them from the chassis. In this case however, we want the terminal to connect firmly to the case to provide the necessary ground connection. It is important that the RCA sockets be insulated from the case and that the ground connection made to them is according to the wiring diagram. If the unit is going to be used with the recommended power supply there should be no hum problems. This power supply, ETI 557, is described later in this issue. It is wired so that the 0 volt line is not connected to the chassis of the power supply. This is important, otherwise a hum loop around the units' mains grounds will result. If you wish to use a power supply other than the 577 then it will be necessary to ensure that the 0 volt line from the supply does not connect to the power supply chassis. Do not 'cure' the problem by disconnecting the ground wire at the 240 volt plug as this will remove any ground connection from the power

Project 473

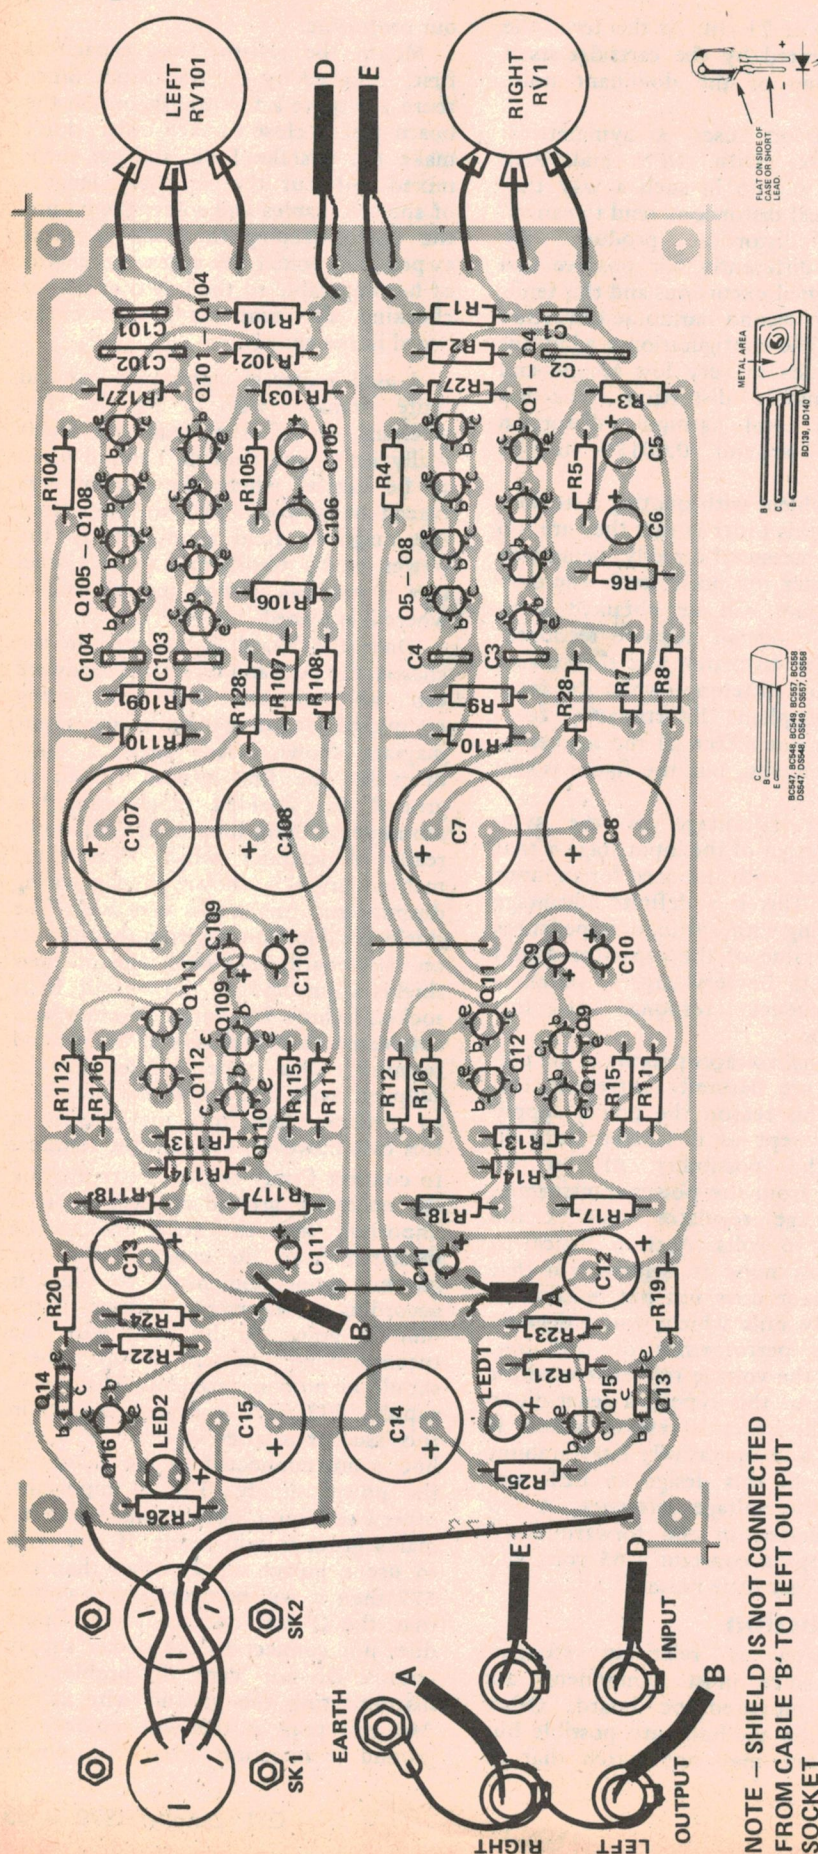

supply chassis. This is not only dangerous, it's illegal.

Powering up

Before turning the unit on make a final check of the board. Check the orientation of the transistors, electrolytic and tantalum capacitors and the LEDs. If all is right, turn down the volume control completely and switch the power supply on. The LEDs in the

PARTS LIST - ETI 473

Resistors

all 1/2W, 5%

R1, R101 . . . 3R3
R2, R102 . . . 10R
R3, R4, R103,
R104 1k
R5, R6, R105,
R106 2k2
R7, R8, R107,
R108 10R
R9, R10, R109,
R110 270R
R11, R12,
R111, R112 . . 2k2
R13, R14,
R113, R114 . . 10k
R15, R16,
R115, R116 . . 390R
R17, R18,
R117, R118 . . 18R
R19, R20 . . . 10R
R21, R22 . . . 560R
R23, R24 . . . 330R
R25, R26 . . . 220R
R27, R127 . . 1k
R28, R128 . . . 220R

Capacitors

C1, C101 3n3 ceramic
C2, C102 4n7 ceramic
C3, C4, C103,
C104 470p ceramic
C5, C6, C105,
C106 22μF 16V tantalum
C7, C8, C107,
C108 2200μF 25V electro
C9-C11,
C109-C111 . . 10μF 16V tantalum
C12, C13 . . . 100μF 25V electro
C14, C15 . . . 1000μF 25V electro

Transistors

Use only types specified - substitutes may result in inferior performance.

Q1-Q4,
Q101-Q104 . . BC559
Q5-Q8,
Q105-Q108 . . BC549
Q9, Q10,
Q109, Q110 . . BC559
Q11, Q12,
Q111, Q112 . . BC549
Q13 BD139
Q14 BD140
Q15 BC549
Q16 BC559


LED1, LED2 . . standard red LED

Potentiometers

RV1, RV101 . . 100R wirewound linear


Miscellaneous

SK1, SK2 . . . 5 Pin DIN socket
Four RCA sockets (insulated from case),
One black terminal, mains lead, plug and
mains cord securing grommet, two knobs,
box to suit, 190 x 60 x 110 mm.

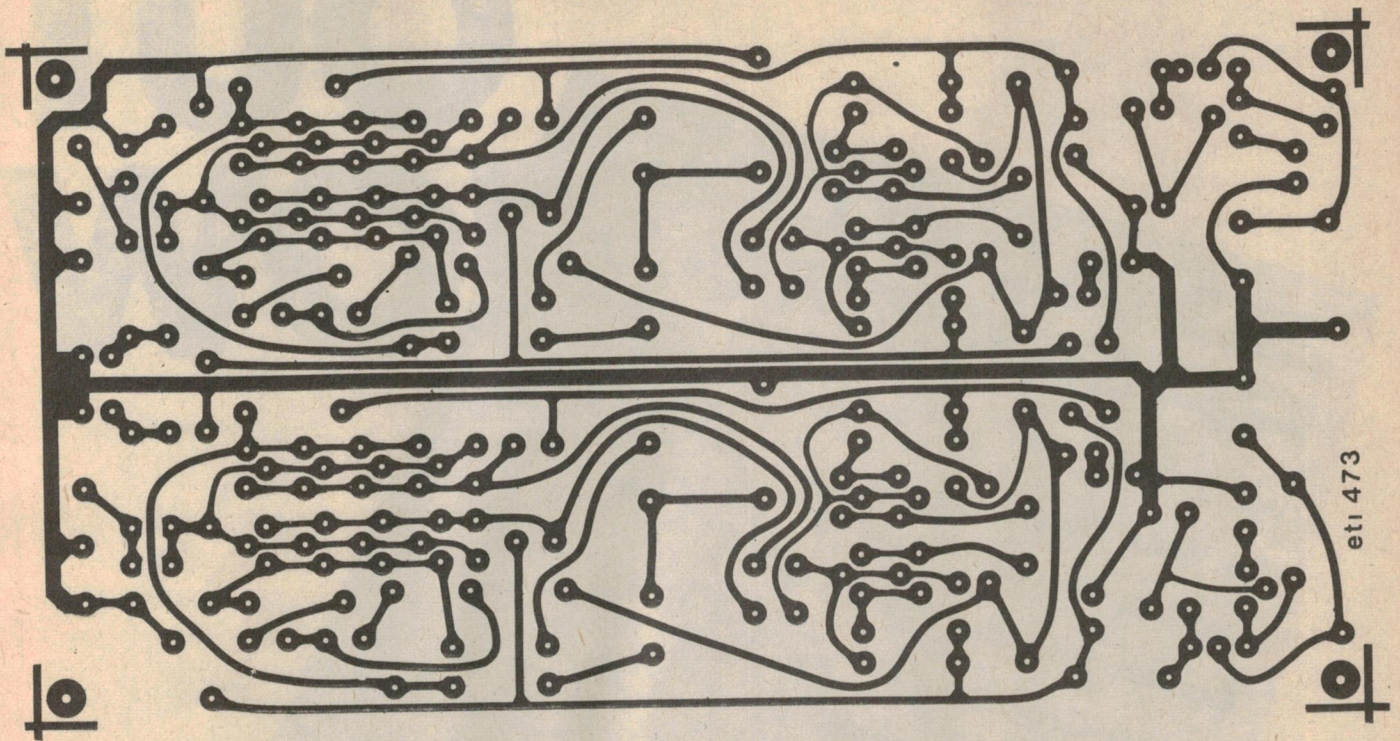


preamp's regulator should come on immediately. I used standard RCA to RCA cables from the output of the preamp to the phono input and had some trouble with hum induction into the leads. Fortunately, we had been sent a set of Audio-Technica type AT620 cables for evaluation several days before and these cured the problem completely.

Perhaps I am biased, but the sound quality of this preamp is extremely good! Using a Nakamichi MC1000 cartridge, this preamp showed distinct improvement over the transformer I was using previously. There is an openness that never existed before and the bass end showed a great improvement being firmer and much more defined. I trust you'll be as satisfied with your project as I have been.

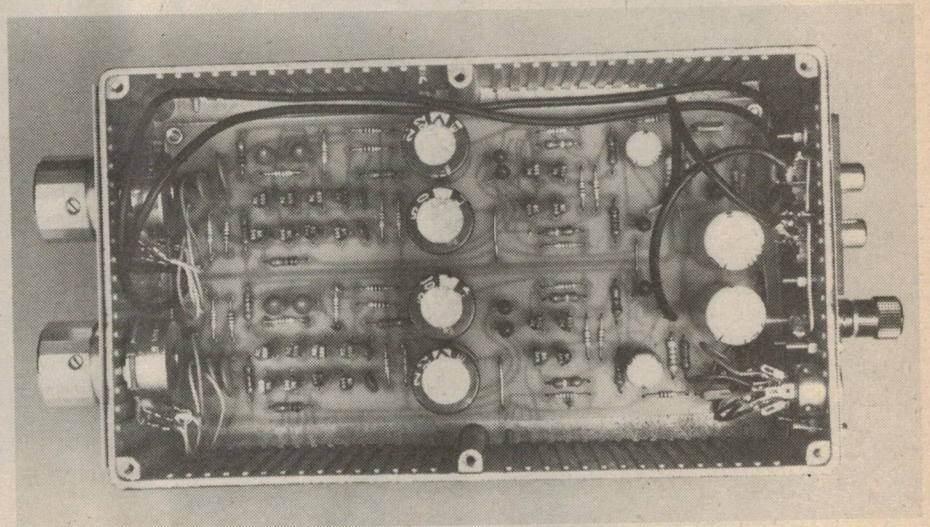

series 4000 MOVING COIL CARTRIDGE PREAMPLIFIER

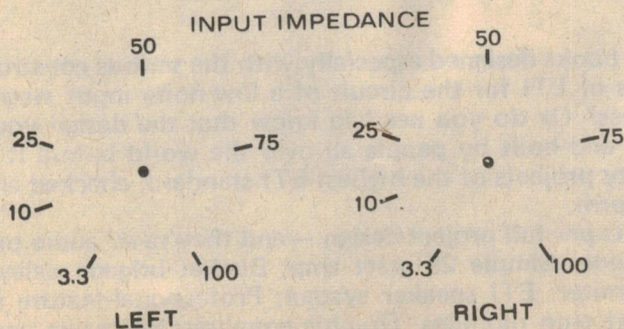

OUT NOW

30 AUDIO PROJECTS

INCLUDING -

25 Watt Amp

General Purpose Preamp

Bucket Brigade Delay Line

Active Crossover

Compressor Expander

Tape Noise Limiter

Transmission Line Speaker

ETI Master Mixer

Graphic Equalizer

50/100 Watt Amp Modules

From Electronics Today International

Thirty Audio Projects is the latest in our line of books designed especially with the serious constructor in mind. Ever found yourself leafing through back-issues of ETI for the circuit of a low-noise input stage? Or looking for some information on bucket brigade devices? Or do you need to know that the design you're using has been checked and re-checked for circuit errors and built by people all over the world before it is published? Thirty Audio Projects contains just that — thirty projects of the highest ETI standard, checked and re-checked and then presented in a compact and complete form.

The price is \$3.95 — that's under fifteen cents per full project design — and they're *all* audio projects, thirty of our most sought-after designs. Projects include: Simple 25 watt amp; Bucket brigade delay line, Active crossover; Compressor/expander; Tape noise limiter; ETI speaker system; Professional-feature mixer; Howl-round suppressor; the ever-popular 50/100 watt amp modules, Graphic equaliser; Spectrum analyser; Audio millivoltmeter.

TASMAN

ELECTRONICS

12 Victoria Street, Coburg,
3058. Ph: (03) 354-5062

OPEN: Mon-Thur 9am to 5.30pm. Fri 9am to 9pm. Sat 9am to 12 noon. MAIL ORDER SERVICE (Stock items — same-day despatch) Pls add \$1 min P&P.

TRANSISTORS —

AC127 . . . 90	BC549 . . . 19	MPF102 . . . 60	2N3300 . . . 85	2N5459 . . . 55	PN3567 . . . 18
AC128 . . . 90	BC557 . . . 20	TIP31A . . . 65	2N3638 . . . 25	2N5462 . . . 90	PN3568 . . . 18
AD149 . . . 2.10	BC558 . . . 20	TIP31C . . . 80	2N3542 . . . 30	2N5485 . . . 60	PN3569 . . . 18
BC107 . . . 35	BC559 . . . 20	TIP32C . . . 85	2N3702 . . . 20	2N5871 . . . 1.70	PN3638 . . . 18
BC108 . . . 35	BD131 . . . 65	2N2219 . . . 50	2N3704 . . . 30	2N5872 . . . 2.25	PN3638A . . . 22
BC108C . . . 39	BD139 . . . 59	2N2222A . . . 35	2N3740 . . . 1.60	2N5873 . . . 1.70	PN3641 . . . 20
BC109 . . . 35	BD140 . . . 59	2N2368 . . . 25	2N3904 . . . 25	2N5874 . . . 1.85	PN3642 . . . 20
BC109C . . . 40	BD262 . . . 1.20	2N2646 . . . 1.00	2N4030 . . . 1.00	2N6124 . . . 1.20	PN3643 . . . 20
BC177 . . . 35	BD263 . . . 1.20	2N2647 . . . 1.20	2N4032 . . . 80	2N6126 . . . 1.30	PN3644 . . . 20
BC318 . . . 22	BFY84 . . . 82	2N2904 . . . 50	2N4033 . . . 1.00	2N6129 . . . 1.40	PN3645 . . . 22
BC319 . . . 22	BFY50 . . . 85	2N2905 . . . 50	2N4036 . . . 1.20	2N6130 . . . 1.30	PN3646 . . . 22
BC320 . . . 22	BFY51 . . . 85	2N2905A . . . 50	2N4037 . . . 1.30	2N6132 . . . 1.60	PN3693 . . . 29
BC327 . . . 30	BF115 . . . 65	2N2907 . . . 50	2N4231 . . . 1.20	2N6134 . . . 1.70	PN3694 . . . 29
BC337 . . . 30	MJ802 . . . 3.60	2N3053 . . . 55	2N4234 . . . 2.10	MP3565 . . . 18	PN4121 . . . 35
BC338 . . . 30	MJ2955 . . . 90	2N3054 . . . 90	2N4238 . . . 1.90	MP3568 . . . 19	PN4248 . . . 29
BC547 . . . 19	MJ4502 . . . 3.60	2N3055 . . . 69	2N5088 . . . 30	PN3565 . . . 18	PN4250 . . . 29
BC548 . . . 19	MJE2955 . . . 1.49	2N3107 . . . 1.20	2N5458 . . . 50	PN3566 . . . 18	PN4355 . . . 29

74LS LOW POWER TTL SERIES —

74LS00 . . . 20	74LS15 . . . 75	74LS73 . . . 60	74LS113 . . . 50	74LS174 . . . 65	74LS251 . . . 85
74LS01 . . . 30	74LS16 . . . 60	74LS74 . . . 40	74LS114 . . . 55	74LS175 . . . 90	74LS253 . . . 85
74LS02 . . . 30	74LS20 . . . 30	74LS75 . . . 50	74LS125 . . . 70	74LS190 . . . 1.60	74LS257 . . . 75
74LS03 . . . 25	74LS21 . . . 30	74LS78 . . . 65	74LS133 . . . 30	74LS191 . . . 1.30	74LS259 . . . 2.20
74LS04 . . . 25	74LS27 . . . 30	74LS85 . . . 1.40	74LS138 . . . 1.10	74LS192 . . . 1.15	74LS279 . . . 70
74LS05 . . . 30	74LS28 . . . 35	74LS86 . . . 60	74LS151 . . . 1.00	74LS193 . . . 1.00	74LS290 . . . 1.30
74LS08 . . . 30	74LS30 . . . 30	74LS90 . . . 60	74LS157 . . . 75	74LS194 . . . 1.20	74LS365 . . . 80
74LS09 . . . 30	74LS32 . . . 30	74LS92 . . . 1.00	74LS160 . . . 70	74LS195 . . . 1.00	74LS366 . . . 80
74LS10 . . . 20	74LS37 . . . 40	74LS93 . . . 85	74LS163 . . . 80	74LS196 . . . 1.30	74LS367 . . . 70
74LS11 . . . 35	74LS38 . . . 40	74LS95 . . . 1.00	74LS164 . . . 1.40	74LS197 . . . 1.60	74LS368 . . . 65
74LS12 . . . 30	74LS40 . . . 30	74LS107 . . . 65	74LS165 . . . 1.40	74LS221 . . . 1.50	
74LS14 . . . 80	74LS42 . . . 45	74LS109 . . . 50	74LS169 . . . 1.90	74LS247 . . . 1.95	

CMOS —

4000 . . . 25	4020 . . . 1.40	4046 . . . 2.20	4076 . . . 1.75	4528 . . . 1.40	74C20 . . . 35
4001 . . . 25	4021 . . . 1.30	4049 . . . 70	4077 . . . 30	4553 . . . 6.90	74C48 . . . 2.50
4002 . . . 25	4022 . . . 1.30	4050 . . . 75	4078 . . . 30	4555 . . . 1.00	74C73 . . . 1.10
4007 . . . 30	4023 . . . 30	4051 . . . 1.20	4081 . . . 30	4581 . . . 3.50	74C76 . . . 95
4008 . . . 1.20	4024 . . . 1.00	4052 . . . 1.20	4082 . . . 30	4582 . . . 1.40	74C90 . . . 1.40
4011 . . . 25	4025 . . . 30	4053 . . . 1.20	4093 . . . 70	4584 . . . 1.00	74C93 . . . 1.40
4012 . . . 30	4027 . . . 70	4060 . . . 1.50	4441 . . . 95	40014 . . . 90	74C175 . . . 1.70
4013 . . . 65	4028 . . . 1.00	4066 . . . 90	4502 . . . 1.40	40097 . . . 1.00	74C192 . . . 1.90
4014 . . . 1.40	4035 . . . 1.20	4068 . . . 35	4506 . . . 70	40098 . . . 1.20	74C193 . . . 2.10
4015 . . . 1.20	4040 . . . 1.40	4069 . . . 30	4510 . . . 1.50	74C02 . . . 35	
4016 . . . 60	4042 . . . 1.20	4070 . . . 30	4511 . . . 1.30	74C04 . . . 35	
4017 . . . 1.30	4043 . . . 1.00	4071 . . . 30	4518 . . . 1.50	74C08 . . . 35	
4018 . . . 1.30	4044 . . . 1.00	4072 . . . 30	4520 . . . 1.40	74C10 . . . 35	

7400 SERIES TTL —

7400 . . . N/A	7414 . . . 60	7439 . . . 50	7473 . . . 55	7493 . . . 50	74154 . . . 1.40
7401 . . . 25	7416 . . . 60	7440 . . . 30	7474 . . . 35	7494 . . . 1.15	74157 . . . 1.40
7402 . . . 25	7417 . . . 65	7442 . . . 80	7475 . . . 45	7495 . . . 1.00	74160 . . . 1.70
7403 . . . 25	7420 . . . 25	7447 . . . 90	7476 . . . 40	74100 . . . 2.00	74165 . . . 1.70
7404 . . . 25	7421 . . . 30	7448 . . . 1.10	7480 . . . 1.00	74107 . . . 70	74172 . . . 1.40
7405 . . . 30	7422 . . . 35	7450 . . . 30	7483 . . . 1.40	74121 . . . 70	74173 . . . 2.60
7406 . . . 60	7426 . . . 40	7451 . . . 30	7485 . . . 1.40	74123 . . . 85	74175 . . . 1.20
7407 . . . 45	7427 . . . 40	7453 . . . 30	7486 . . . 55	74132 . . . 1.30	74180 . . . 1.50
7408 . . . 25	7430 . . . 30	7454 . . . 30	7489 . . . 2.90	74145 . . . 1.50	74188 . . . 3.00
7409 . . . 25	7432 . . . 30	7460 . . . 30	7490 . . . 40	74150 . . . 1.50	74192 . . . 1.80
7410 . . . 25	7437 . . . 40	7470 . . . 50	7491 . . . 1.00	74151 . . . 1.40	74193 . . . 1.80
7413 . . . 55	7438 . . . 40	7472 . . . 55	7492 . . . 80	74153 . . . 1.40	74367 . . . 80

VOLTAGE REGULATORS —

7805 . . . 1.00	78H05 . . . 7.50	78L15 . . . 40	7912 . . . 1.60	7905K . . . 2.95	78CB . . . 2.40
7812 . . . 1.00	78H12 . . . 7.50	78L18 . . . 40	7915 . . . 1.60	79L03 . . . 80	723 . . . 55
7815 . . . 1.00	78H15 . . . 7.95	78L24 . . . 40	7918 . . . 1.60	79L15 . . . 80	309K . . . 1.90
7818 . . . 1.00	78L05 . . . 40	7905 . . . 1.60	7924 . . . 1.60	79L18 . . . 80	317K . . . 2.90
7824 . . . 1.00	78L12 . . . 40	7908 . . . 1.60	79HG . . . 10.80	79L24 . . . 80	

DIODES —

AAV30 . . . 40	OA91 . . . 15	1N3493R . . . 1.70	1N4004 . . . 10	1N4148 . . . 06	1N5404 . . . 40
OA90 . . . 15	1N3493 . . . 1.70	1N4002 . . . 10	1N4007 . . . 20	1N5401 . . . 40	1N5408 . . . 80

BRIDGE RECTIFIERS —

W02 . . . 75	VM48(Dip) . . . 1.50	MDA201 . . . 95	MDA3501 . . . 3.40
--------------	----------------------	-----------------	--------------------

ZENER DIODES —

1/2W, 3.3V-33V, all . . . 19,	1W, 3.3V-33V, all . . . 30,	2 1/2W, 8.2V-18V all . . . 65
-------------------------------	-----------------------------	-------------------------------

SCR's/TRIACS —

C103YY . . . 80	C106Y . . . 65	C106D . . . 75	C106E . . . 70	C122D . . . 1.30	SC141D . . . 1.30
-----------------	----------------	----------------	----------------	------------------	-------------------

LINEAR IC's —

301 . . . 40	380N14 . . . 1.50	555 . . . 35	747 . . . 1.00	MC1494L . . . 6.65	TL082 . . . 1.20
307 . . . 70	381 . . . 2.30	556 . . . 1.20	748 . . . 60	RC4136 . . . 1.45	TL084 . . . 2.30
308 . . . 1.20	382 . . . 2.00	565CH . . . 3.30	CA3046 . . . 1.65	TL071 . . . 80	709 . . . 70
311 . . . 70	3900 . . . 95	567CH . . . 3.00	CA3130 . . . 1.50	TL080 . . . 1.20	318 . . . 3.25
324 . . . 1.00	3909 . . . 1.30	741 . . . 30	CA3140 . . . 1.50	TL081 . . . 70	

MICRO ETC —

SYP2102A-4 . . . 1.90	TMS1000 . . . 7.95	2708 . . . 14.00	93448 . . . 10.50	1488 . . . 1.00
-----------------------	--------------------	------------------	-------------------	-----------------

OPTO —

9368 . . . 2.30	FND357 . . . 1.40	DL747 . . . 3.50	LED yel . . . 30	LED TH209 18 MCT2 . . . 75
FND500 . . . 1.40	LED red . . . 20	LED green . . . 30	LED flashing . . . 20	

RESISTORS —

1/4W WE24 . . . 03	1W E12 . . . 07	5W W/Wound . . . 25	Min. Skeleton Presets . . . 18
Min. Cermet Trimpots . . . 48	Min Multiturn Trimpots . . . 1.45		

TANTALUM

6.3V 47uf . . . 25	2.2uf . . . 08
16V 4.7uf . . . 20	3.3uf . . . 06
25V 10uf . . . 25	4.7uf . . . 06
35V 0.1uf . . . 15	10uf . . . 08
	22uf . . . 13
	33uf . . . 15
	47uf . . . 12
	100uf . . . 16
	220uf . . . 23
	470uf . . . 60
	63V 0.47uf . . . 08
	1uf . . . 08
	2.2uf . . . 08
	4.7uf . . . 10
	10uf . . . 12
	25uf . . . 15
	47uf . . . 16
	100uf . . . 23
	220uf . . . 37
	330uf . . . 40
	470uf . . . 77

CERAMICS

1pf-0.004 7uf . . . 06	0.001uf-0.018 . . . 10
.0068-.01, 63V . . . 06	0.022uf-0.033uf . . . 11
.022uf . . . 08	0.039uf-0.056uf . . . 13
.047uf . . . 12	0.068uf/0.082uf . . . 16
.1uf . . . 18	0.1uf . . . 17
.22uf . . . 25	0.12uf/0.18uf . . . 20
.47uf . . . 25	0.22uf . . . 30

TRIMMER

5pf-65pf	0.27uf 250V . . . 30
variable . . . 30	0.33uf 250V . . . 34
	0.39uf 250V . . . 48
	0.47uf 250V . . . 50
	1uf 250V . . . 75
	0.04uf 630V . . . 35
	0.47uf 630V . . . 85

SUPPRESSOR

NS5 0.5uf . . . 60	0.04uf 630V . . . 35
NNS30 3uf . . . 2.00	0.47uf 630V . . . 85

RG CAN TYPE —

2500uf 35V . . . 1.50	0.04uf 630V . . . 35
5600uf 40V . . . 2.25	0.47uf 630V . . . 85
6800uf 50V . . . 5.20	

RB S/E Electro.

Cap. —	Cap. —
6.3V 47uf . . . 20	2500uf 35V . . . 1.50
10V 4.7uf . . . 08	5600uf 40V . . . 2.25
22uf . . . 10	6800uf 50V . . . 5.20
100uf . . . 12	
10V 10uf . . . 08	
22uf . . . 12	
33uf . . . 08	
47uf . . . 12	
100uf . . . 15	
220uf . . . 15	
470uf . . . 16	
640uf . . . 42	
1000uf . . . 32	
2200uf . . . 50	
2500uf . . . 62	
25V 1.5uf . . . 08	
2.2uf . . . 08	
3.3uf . . . 08	
4.7uf . . . 08	
10uf . . . 08	
22uf . . . 08	
25uf . . . 12	
33uf . . . 10	
47uf . . . 10	
100uf . . . 18	
220uf . . . 24	
330uf . . . 24	
470uf . . . 32	
1000uf . . . 48	
35V 2.2uf . . . 08	
3.3uf . . . 08	
10uf . . . 11	
100uf . . . 18	
220uf . . . 21	
1000uf . . . 53	
2000uf . . . 71	
2200uf . . . 88	
50V 4.7uf . . . 08	
1uf . . . 06	

FUSE- HOLDERS —

3AG size, Panel	1/1.5/2/3/4/5A . . . 10
Mount, screw cap	Type M205
FS1 . . . 49	(20mm)
FS2 . . . 99	0.25/0.315/0.4
In Line Type . . . 28	0.5A . . . 30
Chassis Mount . . . 46	0.63/1/1.6/2
PCB Fuse Clips . . . 06	3.15A . . . 20

FUSES — (3AG)

0.25/0.5/0.75A . . . 16	1/1.5/2/3/4/5A . . . 10
1/1.5/2/3/4/5A . . . 10	Type M205
Type M205	(20mm)
0.25/0.315/0.4	0.5A . . . 30
0.5A . . . 30	0.63/1/1.6/2
0.63/1/1.6/2	3.15A . . . 20

HEATSINKS —

Some of AUSTRALIA'S LOWEST COMPONENT PRICES

Note:: Regular Prices not temporary specials — keep us in mind for that next order. (Diggerman Electronics)



POTS 38c
(LINEAR 1/4" ALUM. SHAFT)

Linear potentiometers rotary carbon 38c ea. 500 Ohm, 1K, 5K, 10K, 25K, 50K, 100K, 250K, 500K, 1M, 2M.

Quality Large red LEDs well diffused wide viewing angle. 17c each, \$1.50 per 10, \$110/K Quality MOUNTING CLIPS 5c ea. \$4/100

LEDS
\$12 a 100
17c each



TRIMPOTS 15c
(10mm)

Values: 100, 250, 500 Ohm, 1K, 2K, 5K, 10K, 25K, 50K, 100K, 250K, 500K, 1M, 2M

Trade/govt./S.T. exempt: welcome. Send for special lists (e.g. \$26 a 100 pots and \$99 a 1000 LEDs plus tax if applicable. Small quantities also.

TRADE ENTRANCE

Schools Credit Okay

BC 107
BC 108
BC 109
13c



METAL CAN TRANSISTOR

BC 108 - 13c
10 for \$1.20
100 for \$11

1 Amp. DIODES
50V 1N4001 - 6c
100V 1N4002 - 7c
400V 1N4004 - 8c
1000V 1N4007 - 12c
10% off 100 SAME

\$4 a 100 SIGNAL DIODE IN4148

\$30 a 1000 5c each

ZENER DIODES: 15c each 400 mW 5% E24 values 3V to 33V



5c ELECTROS
(UPRIGHT)


(per 100 prices in brackets)
Cap. 16V 25V 50V
0.47 uF thru to all all all
10uF 5c(\$3 1/2) 6c(\$3 3/4) 7c(\$4)
22uF 6c(\$3 3/4) 7c(\$4) 8c(\$5)
33uF 8c(\$4) 9c(\$5) 10c(\$6)
47uF 9c(\$5) 10c(\$6) 11c(\$7)
100uF 10c(\$6) 12c(\$7) 14c(\$11)
220uF 12c(\$8) 16c(\$10) 35c(\$17)
470uF 16c(\$12) 22c(\$16) 45c(\$30)
1000uF 22c(\$18) 30c(\$25) 75c(\$50)
1000uF/16V axial — 20c ea. \$8 per 50
2200uF/50V PCB — 95c ea. \$9 per 10
Full axial price list — SAE



5c POLYESTER
FILM CAPS

E12 10% 100V

.001 - 5c	.01 - 5c	.1 - 10c
.0012 - 5c	.012 - 6c	.12 - 11c
.0015 - 5c	.015 - 6c	.15 - 12c
.0018 - 5c	.018 - 6c	.18 - 14c
.0022 - 5c	.022 - 6c	.22 - 15c
.0027 - 5c	.027 - 6c	.27 - 16c
.0033 - 5c	.033 - 7c	.33 - 18c
.0039 - 5c	.039 - 7c	.39 - 19c
.0047 - 5c	.047 - 7c	.47 - 20c
.0056 - 5c	.056 - 8c	
.0068 - 5c	.068 - 8c	All values
.0082 - 5c	.082 - 9c	in uF
		10% off 100 same uF




SCRs C106Y1 40c C122E \$1.20

SCRs:
0.8A 30V C103Y — 35
0.8A 200V C103B — 60
4A 30V C106Y1 — 40
4A 400V C106D1 — 75
8A 400V C122D — \$1.05
8A 500V C122E — \$1.20

TRIACS:
6A 400V SC141D — \$1.30
10A 400V SC146D — \$1.50
DIAC ST2 — 35
Chart to identify leads — 10c
Plus trigger info.

25 A 400V
SC260D TRIAC
C37D SCR
EA. \$2.50



2c RESISTORS 1/4W
\$1.80 per 100
SAME RESISTANCE

Our 3 year old price still current. Opposition hoped we would go broke but our price remains at 2c ea. 1 Ohm to 10 M 1/4W 5% E12 carb. film.

APPROX. SIZE:
1/4W miniature metal glaze
1 Ohm to 1M 5% E12
1M2 to 10M carb. film (larger)

RESISTORS 3c Some carb film instead
\$2.50 per 100
SAME RESISTANCE

CONSISTANTLY LOW PRICES


Keep electronics a hobby and not a luxury, compare our prices and buy from us. Same day turnaround service (unless swamped). All goods top quality and new. No minimum order. One P/P charge of 45c regardless of quantity. Advert current 3 months for late readers

CONSISTANTLY BETTER SERVICE

THE BEST BUY IN WATCHES



SOLAR POWERED
LCD WATCH
with rechargeable battery.
Worth over \$100. But our price includes postage
ONLY \$69
Truly solar powered.
Daily need 2 minutes full sunlight electric light also charges.
Stainless steel.
5% off two or more

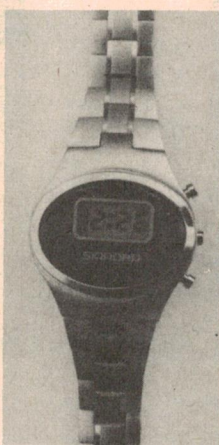

LADIES LCD WATCH
4 digit 5 function
Gold plated or Stainless steel.
ONLY \$49 includes postage
We reckon the best style available.
5% off two or more

JEWELLERS QUALITY - EXCEEDS EXPECTATION

BEST STYLE WE HAVE SEEN

Both watches feature:- 12 months guarantee-digits constantly displayed. Hour, minutes, seconds, month, date. Nightlight Satisfaction guaranteed or return within 14 days. Competable trade discounts. Agents wanted every town.

WANT TO MAKE A FORTUNE ? BE A MILLIONAIRE ?

Most millionaires are self made - here's how Start building your fortune today by sending for our free brochure on:-

- STARTING MILLIONAIRES SUCCESS KIT
- MAIL ORDER RICHES SUCCESS KIT
- ZERO CASH SUCCESS TECHNIQUES
- REAL ESTATE SUCCESS KIT

- and many more including books on
- HOW TO BORROW YOUR WAY TO A GREAT FORTUNE
- SMART MONEY SHORT CUTS TO BECOMING RICH

INTERNATIONAL NEW PRODUCTS

150 NEW PRODUCTS, INVENTIONS, MAIL ORDER ITEMS, IMPORT EXPORT OFFERS, WHOLESALE CATALOGUE SOURCES, Illustrated (This item suitable business use mostly).

Dealer for world famous WHITES metal detectors Best selling detectors in Australia. Brochures 10c

Sorry our special reference July Issue still under study. Instead we offer, while stocks last:-

RESISTOR SELLOUT

\$1 per 100 pack same resistance 1/4W 5%
1 Ohm to 1M stocked at ad booking
All values must go - new brand coming

DIGGERMAN ELECTRONICS

P.O. BOX 33, CORAMBA, N.S.W. 2466

A general purpose, dual 12 V supply

David Tilbrook

Whilst this supply was designed specifically to power the Series 4000 moving-coil cartridge preamp it should find application in many electronic projects.



Our prototype was housed in a diecast box to match that used for our Series 4000 moving-coil cartridge preamp, although any suitable box may be used if the power supply is intended for another application. Scotchcal front panels should be available from kit suppliers or separately from Radio Despatch Service in Sydney.

THIS POWER SUPPLY provides the ± 12 volts needed by the Series 4000 moving coil cartridge preamplifier. We intend designing a range of hi-fi system 'add-ons' like the M.C. preamp and rather than have a power supply in each unit they will be powered from this supply. This decreases the cost of building the units and just as importantly removes the major source of hum from within the chassis.

The supply delivers positive and negative 12V dc at 1A while the IC series regulators provide short circuit and temperature protection. These regu-

lators have a tendency to oscillate at around 3 MHz and for this reason must have their output pins bypassed to ground through an appropriate capacitor. If they are allowed to oscillate the device quickly overheats and its thermal protection cuts in.

The regulators are mounted onto the chassis which acts as a heat sink. If the recommended power transformer is used, the voltage after rectification is approximately 17 volts. The regulators must drop 5 volts at a worst-case current of one amp, so they are dissipating a maximum of five watts which is well within their ratings.

Construction



The power transformer used in the prototype was a Ferguson type PL30/40 VA. This is one of their low profile transformers and fits easily into the die-cast aluminium box. The printed circuit board has been designed to slot into the grooves in this box.

Assembly of the pc board is not difficult as it has relatively few components. If you are using the same box we did it is easier to solder pc board pins onto the board, slot the board into place, bolting the regulators down, and then make the necessary wiring interconnections. Both regulators must be insulated from the case using the appropriate mounting hardware. The case of these regulators is connected to pin 2. For the 7812 this is the ground connection, and accidental connection to case will cause a hum loop when the unit is connected to the moving coil cartridge pre-amp. In the 7912, pin 2 is the input to the regulator and as such has 17 volts directly from the bridge rectifier connected to it. Accidental connection of this to ground will probably damage the rectifier diodes, so check with a multimeter that the case of this regulator is well insulated. ►



Rear view of the power supply showing placement of the major components.

Project 577

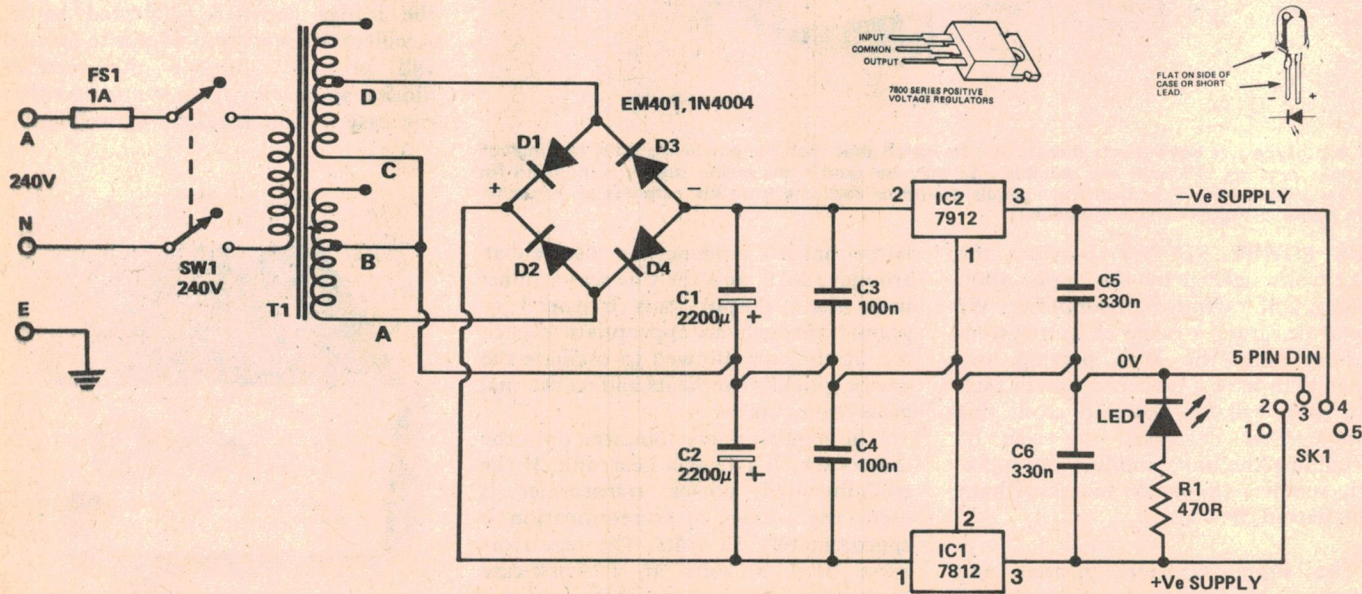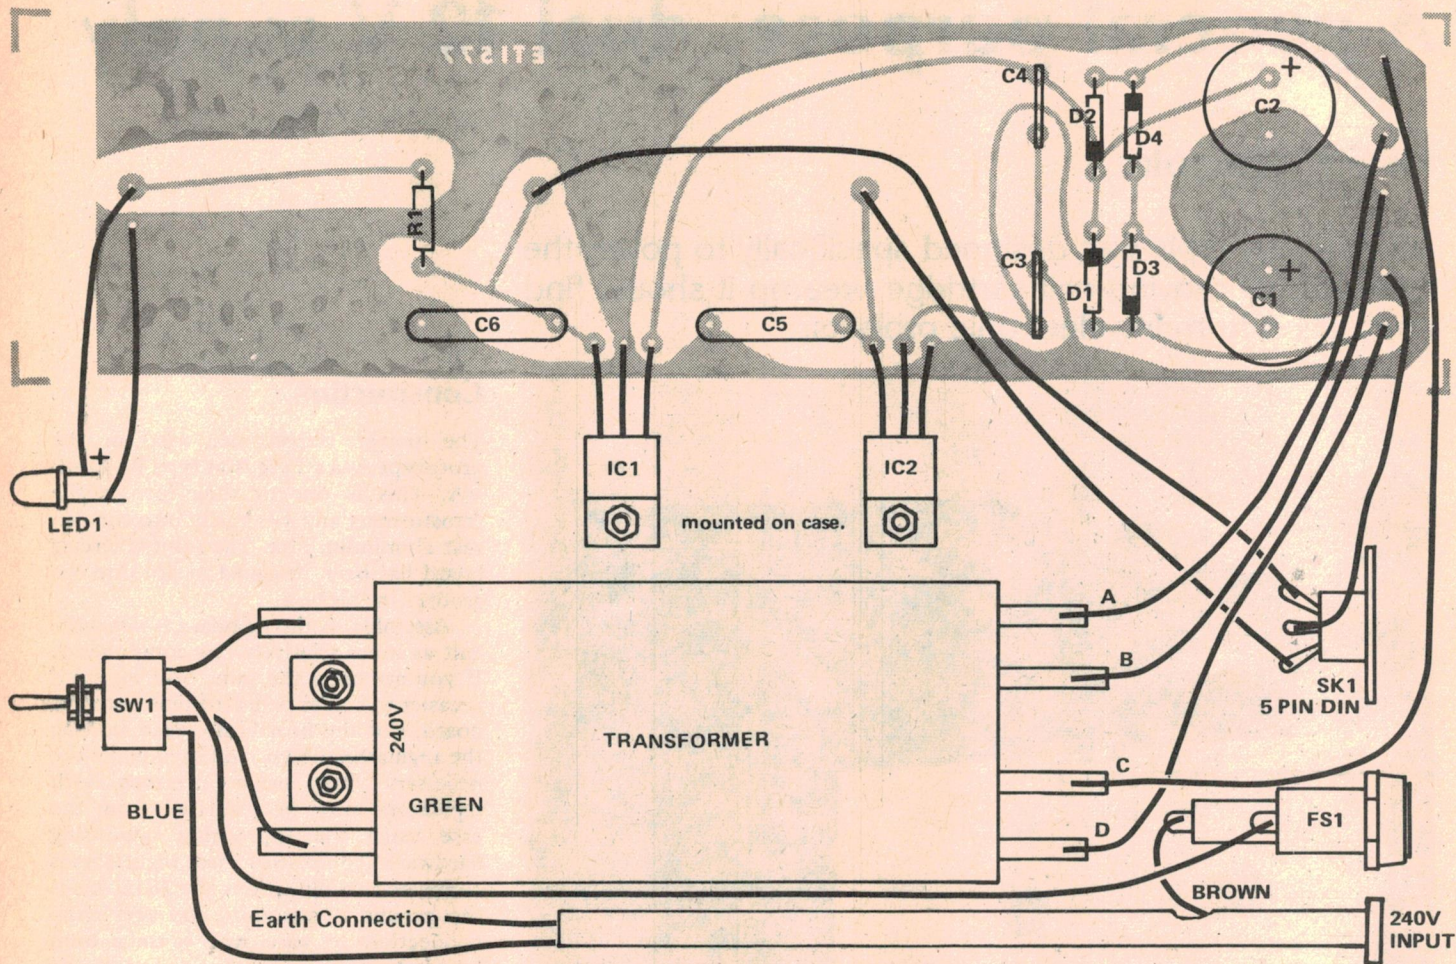

ETI 577

HOW IT WORKS — ETI 577

Mains 240 Vac is applied to the primary of the transformer via a 1A fuse. The transformer secondary consists of two 15 V windings with tapings at 12 V. The 12 V tapping of one is joined to the 0 V of the other — this junction (effectively a centre-tap) forming the volt rail.

A bridge rectifier D1-D4 rectifies the ac voltage from the transformer and supplies around 17 volts to the inputs of the regulator ICs. Capacitors C1-C4 filter the input to the regulators while C5 and C6 ensure high frequency stability of the regulators.

The IC regulators provide a stable, regulated output very close to the specified 12 Vdc and can supply up to one amp of dc current. Overload and thermal protection is provided internally on the IC chip. These regulators are convenient, inexpensive and require the minimum number of components.

PARTS LIST - ETI 577

Resistors all ½W, 5%
R1 470R


Capacitors
C1, C2 2200µF 25V electro
C3, C4 100n greencap
C5, C6 330n greencap

Semiconductors
D1-D4 IN4004, EM401 or sim
LED1 Red led, TIL220R or sim

IC1 7812 or LM340-12 volt-
age regulator (positive)
IC2 7912 or LM320-12 volt-
age regulator (negative)

Miscellaneous
T1 transformer, 15V-0-15V,
1.3 amps (Ferguson
PL30/40VA)
SW1 DPDT 240V switch
F1 1A, 3AG type fuse
SK1 Chassis mounting 5 pin
DIN socket

Chassis mounting 3AG fuse holder, 5 pin
DIN plug, 240V mains plug, 240V/3 core
cable, rubber mains cable grommet, Die-
cast aluminium box 190 x 60 x 110 mm.

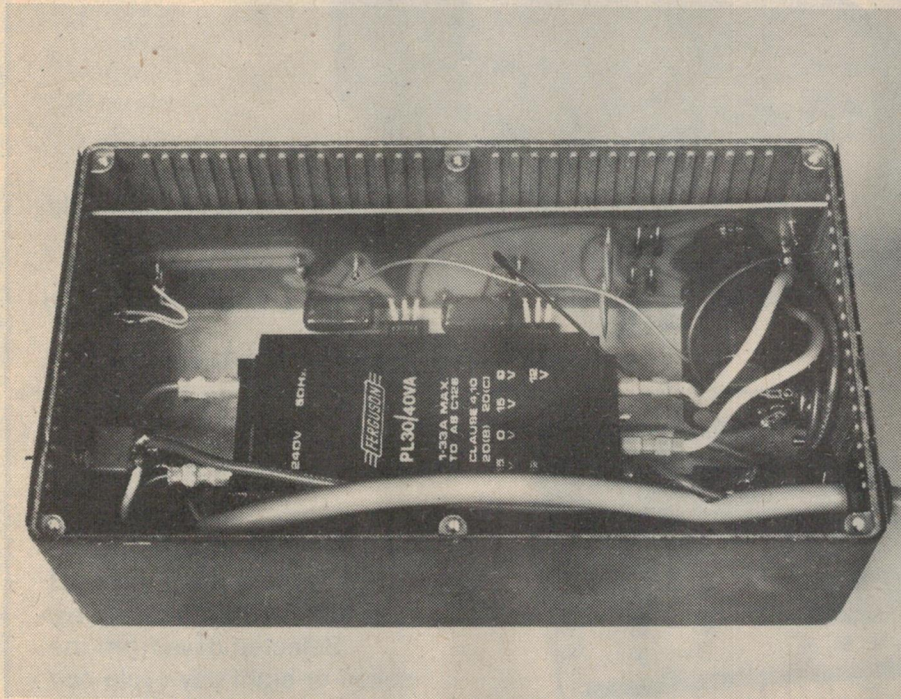

Internal view of the power supply showing how the pc board was mounted, the position of the power transformer and the general wiring arrangement. General parts placement is not at all critical and a variety of layouts is possible. Be sure to insulate the regulator ICs.

ated from the chassis before powering up.

The LED is mounted onto the front panel with a standard LED mounting grommet and connected to the board by two short lengths of hook-up cable.

Make absolutely certain that all 240 volt connections are secure and that the mains cable ground lead is connected to chassis as shown in the wiring diagram. The mains flex must be secured to the chassis, either with a clamp-type grommet where it enters the box or with a cable clamp on the inside.

Before applying power to the unit make a final check of the board and all connections to the power transformer. Check the 240 volt connections and ensure that the regulators are satisfactorily insulated from the chassis. If all is correct, turn the power supply on. The LED on the front panel should come on immediately. Check the voltage present on the output DIN socket which should be very close to 12 volts (certainly within 0.25 V). Make sure the positive and negative supply connections terminate on the correct DIN socket pins. ●

ALL ELECTRONIC COMPONENTS

That's our name . . . that's our game!!!

MAJOR STOCKISTS OF ALL GENERAL RADIO AND ELECTRONIC COMPONENTS

Only "recognised brands" and top-quality components stocked. Resistors (incl. large industrial types) capacitors, semi-conductor devices, switches, meters, valves, metalwork, front panels, plugs, sockets, cable connectors, transformers, speakers, etc. Prompt and efficient attention through our mail order department. Major stockist of all ETI & EA kits — you name it — we will quote.


ETI AND EA KITSET SPECIALISTS — TOP QUALITY, LOW PRICES

LEARN WHILE YOU BUILD

JOIN THE GOLD RUSH \$57.86

(Includes wire and cable but not woodwork). Plus P & P \$5.00

Compares with locaters 10 times the price!

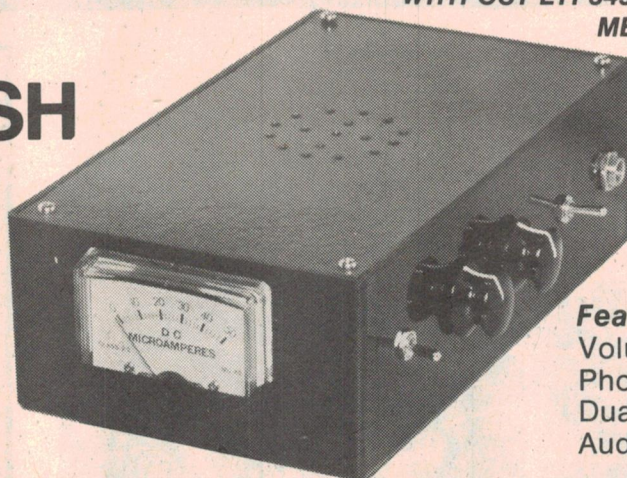

WITH OUT ETI 549 INDUCTION BALANCE METAL LOCATER KITSET*

Features include:

Volume & Level controls
Phone Jack
Dual Sensitivity Range
Audio & Meter indication

**As featured in ETI May 1977 and ETI Simple Projects No 2.*

Stac Timer ETI 650

\$113.50

(inc Tax)

plus \$5.00 P & P



This unit has four different programmable outputs, clock controlled switch-on/switch-off times.

Selected days from the seven or eight day cycle can be "skipped".

Ideal for operating air conditioning, fish tanks, hi-fi systems, tape recorders, slide & movie projectors and laboratory control etc.

YOU NAME IT — WE'VE PROBABLY GOT IT!

For part of our range refer to EA November 1978.

WE HAVE — one of the biggest ranges of kits, parts & PCB's in Australia
WE HAVE — over 300 different types of IC's
WE HAVE — over 250 different types of transistors

SPECIAL SERVICE FOR SCHOOLS — EVERYTHING THE YOUNG ELECTRONIC STUDENT WOULD NEED
FOR FULL LIST OF KIT SETS REFER TO ETI JULY 1979.

E. D. & E. (SALES) PTY. LTD., NOW

ALL ELECTRONIC COMPONENTS

118 LONSDALE STREET, MELBOURNE, VIC. 3000. TEL: 662-3506.

Check out these sophisticated kits from Denmark

JostyKits... Denmark's finest, offer the kind of innovative design inside and outside that you'd expect from Scandinavia. Created by qualified electronic engineers, they feature solid-state space age technology advanced enough for the most

demanding kit builder. Each comes with a comprehensive instruction booklet. Whether you're a novice or experienced builder — JostyKits will give you hours of satisfaction in construction and performance!

Audio

AF300 AUDIO AMPLIFIER

A real work-horse, this universal power amp has a wide range of applications such as car radio, record players and small receivers.

Due to its well designed electronic circuit, the AF300 can be used over wide voltage ranges without deterioration of the specification parameters.

Kit AF300 — \$25.00

AF340 40 WATT AUDIO AMPLIFIER MODULE

High quality 20-20,000 Hz, 37w RMS with low distortion.

Kit AG340 — \$35.00

FM Tuners

HF325-2 QUALITY FM TUNER MODULE

The HF325 is a complete high quality FM tuner of professional standing. The tuner unit is ready-made and pretrimmed, making it child's play to assemble. Tuning range 88-108 MHz, operating voltage 12-55 ac. Kit HF325 — \$79.00

Stereo decoder HF 310

HF310 FM RECEIVER

The HF310 is a very reasonable priced HF FM tuner. Fully trimmed, the sensitivity according to IHF standards is better than 10uV. Features 60 dB S/N ratio and low harmonic distortion.

Kit HF310 — \$49.00

HF330 STEREO DECODER

Gives 40-45 dB channel separation, just add to a good quality FM receiver. Kit HF330 — \$24.00

Pre-amps (RF)

HF395 RF PREAMPLIFIER

Gain 30dB to 20 MHz, 10 dB to 100 MHz and 5 dB to 226 MHz. Ideal to boost reception on short-wave receivers. Kit HF 395 — \$6.00

HF385 VHF/UHF ANTENNA PREAMP

Superb quality with two aerial inputs and one down lead which simultaneously supplies current from the power supply. Frequency range 40-250 MHz and 400-820 MHz. Gain 9-18 dB, depending on frequency. Kit 385 — \$30.00. Box B850 — \$6.00.

New quality stereo kits

Complete system (excluding speakers) with attractive Scandinavian designed cabinet

SY 310 15 w stereo kit
\$230.00

SY340 37W stereo kit
\$289.00

Light Shows

AT465 LIGHT SHOW

Turn your music into light. Simply connect this 3 channel light show to the audio terminals of your amplifier and this quality kit does the rest for you!

Kit AT465 — \$64.00

Attractive box and knobs B6065 — \$25.00

AT468 4 CHANNEL LIGHT SHOW

This superb kit drives 4 lights (400w per channel) from the audio amplifier output. Kit AT468 — \$75.00. Attractive box and knobs B3265 — \$48.00

AT365 LIGHT SHOW

This quality kit uses microphone input instead of connection to the audio output. 1599w max.

Kit AT365 — \$69.00

Box and knobs B3265 — \$48.00

FM Transmitter

HF65 FM TRANSMITTER 60-148 MHz

Will run 5w output with heat sink. Ideal for signal testing of for a miniature transmitter which could be received on a standard FM receiver. Kit HF65 — \$9.00.

Receiver Converter

HF305 VHF CONVERTER

Converts FM 105-148 MHz to 105 MHz.

Kit HF305 — \$28.00

Box B3405 attractive chassis kit — \$24.00

AM Receiver

HF61 MEDIUM WAVE

RECEIVER 540-1600 KHz receiver complete with ferrite coil antenna. Kit HF61 — \$9.00

Power Supplies

NT415 LAB POWER SUPPLY

0-30V 1 amp well-regulated supply for professional use. Complete with box and transformer.

Kit NT415 — \$128.00

NT300 LABORATORY POWER SUPPLY

2-30V High quality supply, regulated 2-30V dc at 2 amps with overload protection. Complete with box and transformer. Kit NT300 — \$110.00

Quick assembly kits

JK01 GENERAL PURPOSE AMP 0.5w \$18.00

JK02 MICROPHONE AMPLIFIER \$18.00

JK03 SINE WAVE GENERATOR

20-20,000 Hz. \$30.00

JK04 FM TUNER 88-108 MHz. \$30.00

JK05 27 MHz RECEIVER. \$33.00

JK06 27 MHz TRANSMITTER. \$29.00

JK07 DUAL TONE DECODER FOR

R/C MODELS. \$43.00

JK08 330Vac LIGHT OPERATED RELAY. \$19.00

JK09 SIREN KIT inc. SPEAKER. \$19.00

JK10 PHOTOGRAPHIC TIMER 240 Vac. \$23.00

JK101 CAR BURGLAR ALARM KIT. \$55.00

New Kits

AT347 Electronic Roulette. \$54.00

AT350 2 amp triac light controller. \$12.00

AT357 Touch-control light dimmer. \$33.00

AT356 6 amp AC regulator. \$27.00

MI-360 Multivibrator, sq. wave to 10MHz. \$6.00

SY-310 15w stereo amplifier kit. \$230.00

SY-340 37W stereo amplifier kit. \$289.00

VICOM

Mail Orders: Direct to VICOM, 68 Eastern Rd., Sth. Melbourne, Vic. 3205. Enclose \$1 extra for handling and postage costs.

JostyKits are available now from:

Sydney: Custom Communications, 6 Orchardleigh St. Yennora. Ph. 631-3544.

Radio Despatch Service
869 George St
Sydney Ph. 211 0816

Adelaide: Hamtronics,
Goodwood Rd, Kingspark,
Ph. 272-8417. Port Adelaide.

International Communications Systems, 75-77 Dale St., Port Adelaide. Ph. 47-3688.
Melbourne: Eastern Communications, 898 Riversdale Rd Camberwell. Ph. 836 8635.

Tasman Electronics,
12 Victoria St, Coburg.
Ph. 354 5062.
J.H. McGraths & Co. P/L,
208 Little Lonsdale St,
Ph. 663 3736.

Brisbane: Delsound,
1 Wickham Tce.-
Ph. 229 6155.
Launceston: Advanced Electronics, 5A Quadrant,
Ph. 31 7075, Tasmanian Hi-Fi Company, 87A Brisbane St, Ph. 31 5815.

Sydney 681 3544
Adelaide 43 7981
Gold Coast 32 2644
Canberra 31 6685
Melbourne 836 8635
Perth 321 3047
Geelong 78 9660
Rockhampton 28 2843
Wagga 21 2125


Hobart 43 6337
Cairns 54 1035
Launceston 44 3882
Brisbane 38 4480
Wellington (N.Z.) 28 7946



RADIO PARTS GROUP

THE CATALOGUE PRICE MAILING SERVICE

Over many years we have developed an effective computerised service and catalogue which has become the reference book for the electronics trade. Order your copy now and increase your product knowledge and efficiency.

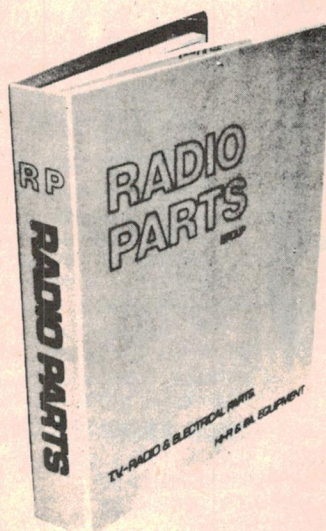

COMPREHENSIVE CATALOGUE

A fully illustrated reference book with more than 12,000 lines described in detail

NOW
AVAILABLE
AT
\$3.95
PER COPY

TECHNICAL SEMICONDUCTOR CATALOGUE

The Radio Parts Group "off the Shelf" stock catalogue

A new catalogue containing specifications, technical drawings, circuit details and application notes on the widest range of semiconductor devices stocked in Australia. Over 2500 devices are listed and described with a quick reference indexing system of fast, easy product referral.

SECTION ONE — DIODES

General purpose — rectifier — switching — zener, varicap — tunnel, bridges, SCR's — SCS's Triacs — Diacs

SECTION TWO — TRANSISTORS

NPN — PNP Germanium — silicon-unijunction — ET — Darlington

SECTION THREE — OPTO ELECTRONICS

LED's — Displays — Couplers — photo transistors LDR's

SECTION FOUR — LINEAR

Regulators — OP Amps/Buffers — voltage comparitors, Audio and TV circuits

SECTION FIVE — DIGITAL

T.T.L. (7400, 74L500 SERIES)

SECTION SIX — CMOS

(74C and 4000 SERIES)

SECTION SEVEN — MOS/LSI

Clocks, counters/timers — organ circuits, TV circuits etc.

SECTION EIGHT — INTERFACE

Display drivers — MOS Memory etc.

SECTION NINE — MEMORY

MOS RAMS — BI POLAR RAMS — CMOS RAMS — MOS EPROMS — BI POLAR PROMS — MOS ROMS — BI POLAR ROMS, SHIFT REGISTERS ETC.

SECTION TEN — MICROCOMPUTERS

SC/MP — PACE — 8080A — STARPLEX — INSTRUCTOR 50

FOR YOUR ANNUAL SUBSCRIPTION OF \$20 YOU WILL RECEIVE:-

- 4 illustrated catalogue sections (AVAILABLE NOW!)
- A new heavy-duty, long-lasting silver polypropylene cover fitted with a magazine holder with 6 metal rods for easy insertion of each section and price list.
- Up-dated computerised price services.
- Monthly specials lists, manufacturers' surplus stock offers and the latest information on new products.
- Current valve and semi-conductor availability lists

PLUS FREE

TECHNICAL SEMICONDUCTOR CATALOGUE

562 Spencer Street, West Melbourne, Phone (03) 329-7888
1103 Dandenong Road, East Malvern Phone (03) 211-8122

A universal process timer

Phil Wait

This simple timer has myriad applications in electronic and photographic work. It features a LED display that "counts down", indicating elapsed time, that is readily visible in daylight or in a darkroom.

VARIOUS PROCESSES in fabricating electronic projects require timing a chemical reaction or process — developing photoresist in making printed circuit boards being a prime example.



Following the completion of our darkroom here at ETI which we use for making negatives and printed circuit boards, it was decided a simple timer was needed to control the light source used for exposure. Because different times are used for exposing film, printed circuit photoresist and Scotchcal, the timer had to have switchable ranges which could be pre-set between a fraction of a second and ten minutes. Some form of elapsed time indication was considered necessary for the longer exposures as was some form of fine adjustment for either slightly under- or over-exposing the film. Finally, the unit had to switch 240 volts at several amps to control a bank of UV-fluoro tubes used for exposing photoresist.

Someone then suggested it would make a good project — after all, there's very little we do here that many of our readers don't do themselves at home.



In fact, this timer is not just limited to the applications we use it for, but can be used to control anything from an egg timer to an injection moulding machine. Judging from some of the calls we get from readers, this timer should find its way into all sorts of applications.

The technique

The easiest way of producing a time delay is by using a 555 timer IC, but a glance at the data sheet shows that it should not be used for periods in excess of 100 seconds. By using the 555 as an oscillator and feeding its output into a 4017 counter/decoder IC the maximum

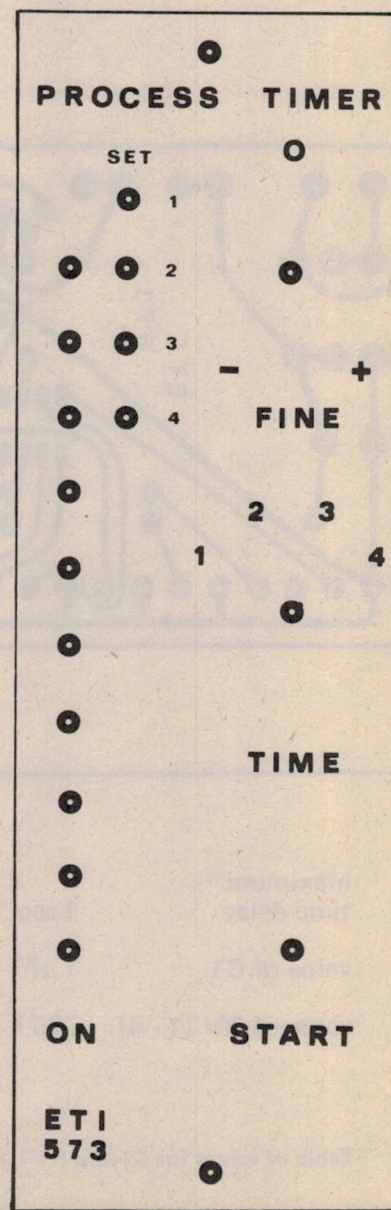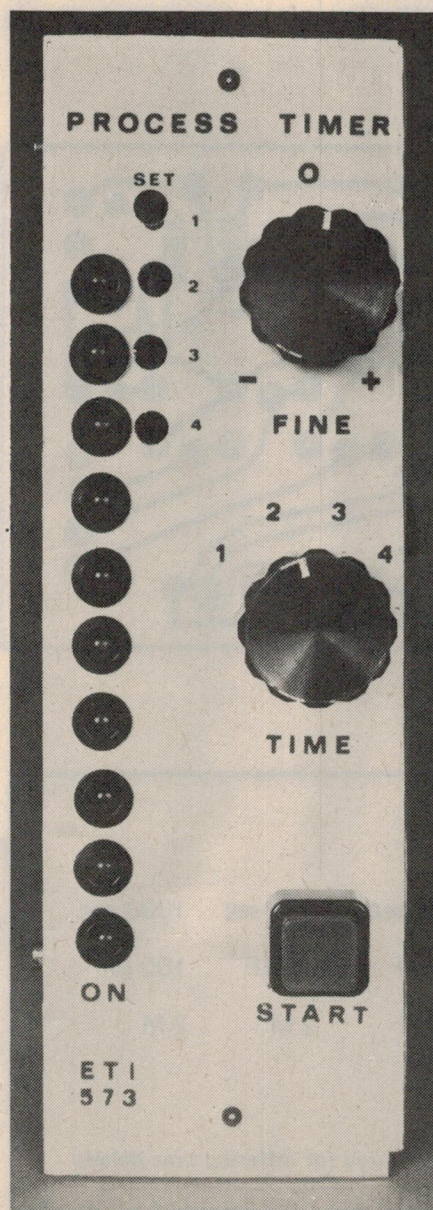

Project 573

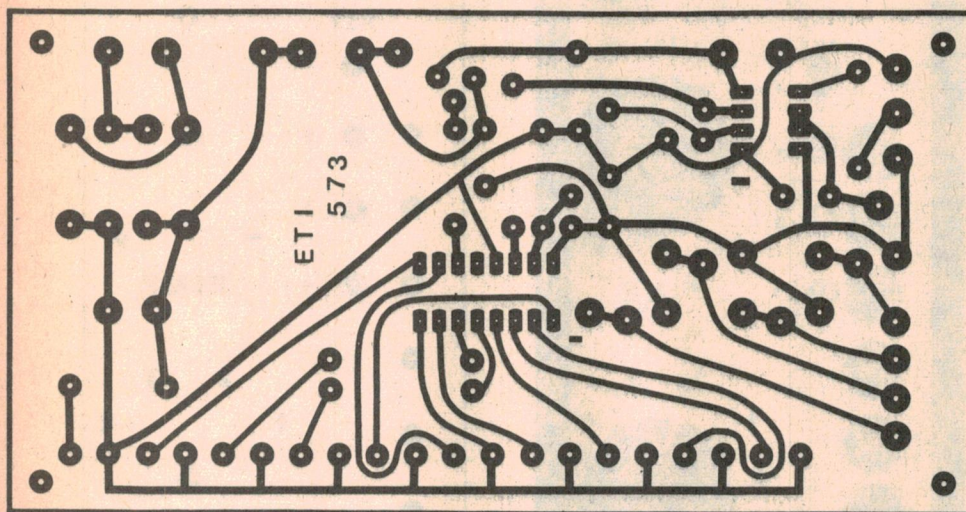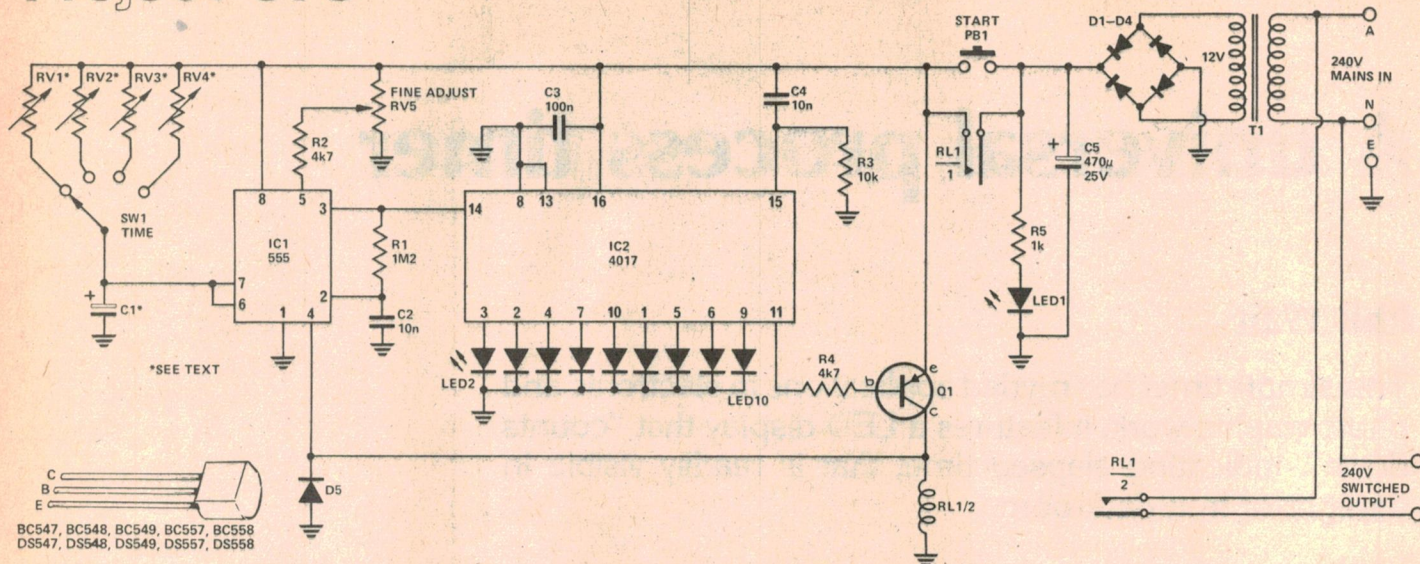

Maximum time delay	1 sec	10 sec	100 sec	1000 sec
value of C1	1 μ F	1 μ F	10 μ F	100 μ F
value of RV (1 - 4)	200 k	2 M	2 M	2 M

Table of values for C1 and RV1 - RV4 required for differing time delays

timing period can be increased ten fold. The unused decoded outputs can then be connected to a column of LEDs which will give an indication of elapsed time.

Each pulse from a 555 clocks the 4017, moving a high level along its ten decoder outputs, lighting each of the LEDs in turn. When the high level reaches the last output it is used to operate the relay and thus the time delay has been multiplied by ten.

A permanently-lit LED has been included at the bottom of the row to show when the unit is on. This also gives a better indication of elapsed time in a darkroom, as the LEDs can be seen to step towards a reference light.

Four time ranges have been provided with a trim pot on each one for easy adjustment. The table gives the values for each trim pot and C1, for a variety of times. The minimum time is limited by the time taken for the relay to operate, maximum time by the limitation of the 555. In practice, times from 100 mS to twenty minutes can be achieved. For very short times the time elapsed indication will not be much use and the LEDs can be left off the board.

Fine adjustment of the timing is achieved by adjusting the threshold voltage on pin 5 of the 555. When the voltage on pin 5 reaches a set value, the output (pin 3) of the 555 goes 'low' (i.e. the 555 triggers). This voltage is normally set at two-thirds the value of the supply rail, fixing the time during the charging cycle of C1 when the 555 triggers.

If the threshold voltage is increased, the time taken for C1 to charge to the required value increases, and the frequency of oscillation decreases. Thus, the total timing period is increased.

What device you want to control

HOW IT WORKS — ETI573

The timer consists of a 555 timer IC used as an oscillator driving a 4017 counter/decoder IC, the decoded outputs being used to drive a row of LEDs and switch a relay.


The timing period is set by the frequency of oscillation of ICI. This is dependent on the time constant of RV1-RV4 and C1. As either of these components are increased in value the time constant will increase and the frequency of oscillation decrease. Fine frequency adjustment is provided by RV5 which adjusts the threshold voltage on pin 5 of the 555. This voltage is normally set at two thirds of the supply voltage, but here it is adjusted varying the required voltage across C1 to the 555.

Output from the 555 is fed to the clock input of the 4017. After each pulse a different decoded output of the 4017 goes high, lighting each LED in turn. After the tenth clock pulse the output on pin 11 of the 4017 goes high. We shall come to what that does shortly.

When power is first applied, the relay contacts RL1/1 are open and the bottom LED (LED 1) is lit. When the 'start' button is pressed the 4017 is reset to zero by a positive pulse applied to pin 15. This pulse is provided from R3 and C4. Pin 11 goes low, turning on the PNP transistor Q1, and the relay operates. The now closed relay contacts (RL1/1) short out the start button and sustain the power after the start button has been released. The transistor also drives the reset line of the 555 (pin 4) which commences to oscillate. This ensures accurate timing of the first cycle.

On the tenth pulse from the 55 pin 11 of the 4017 goes high, turning off Q1, stopping the oscillator, and the relay is de-energised. The contacts RL1/1 open removing the supply to the timer returning it to its original condition, ready for the next sequence.

During the timing period, the second set of contacts RL1/2 close and can be used to switch up to 5A using the relay specified.

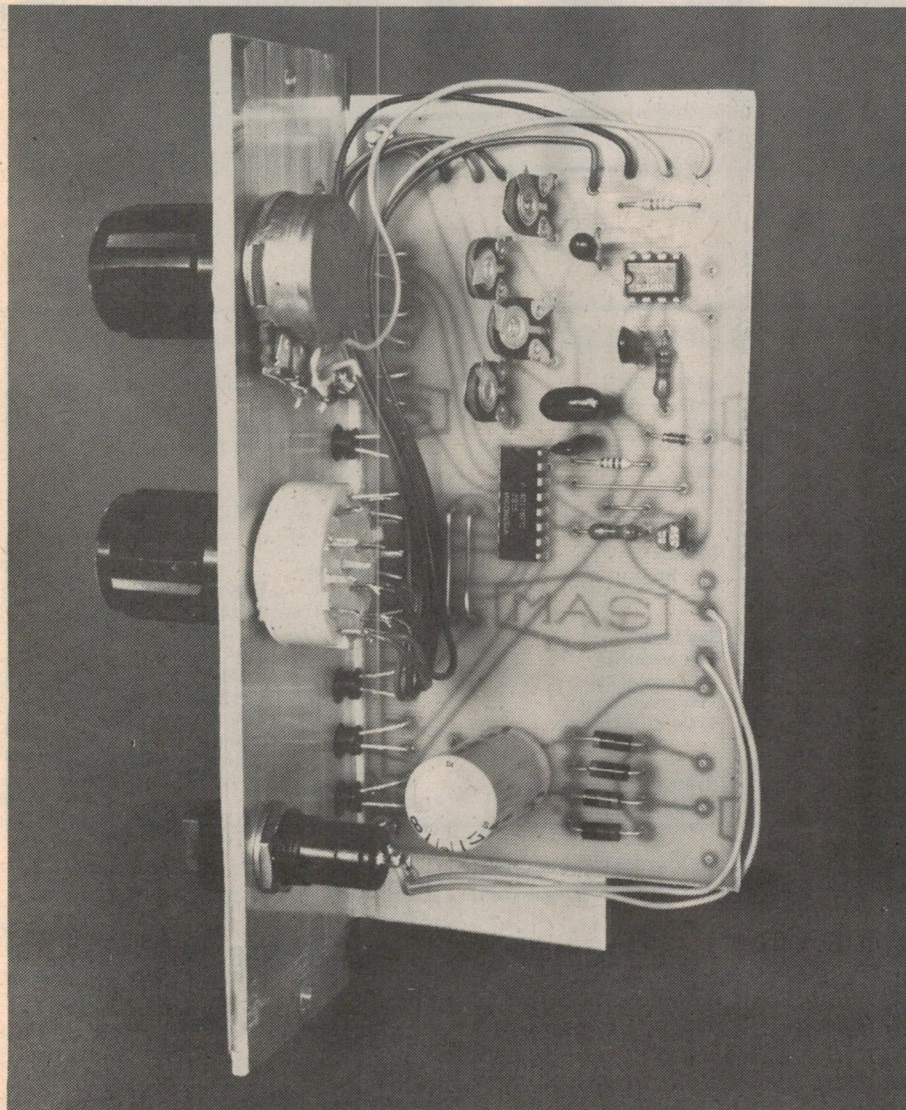

electronics today
INTERNATIONAL


Synergistic Beer Drinking

WITH ONE BOUND, HE
WAS BY HER SIDE.
NORMA FELT HIS HOT
BREATH ON HER CHEEK
AS HE RIPPED THE
THIN SILK FROM.....

OH...OOH!



On the second Wednesday of each month, at about 6 p.m., the ETI staff and readers meet at the Bayswater Hotel, in Bayswater Road, Rushcutters Bay, (just up from the Rushcutter Bowl) to discuss electronics (or anything) over a few beers. Why don't you come along?

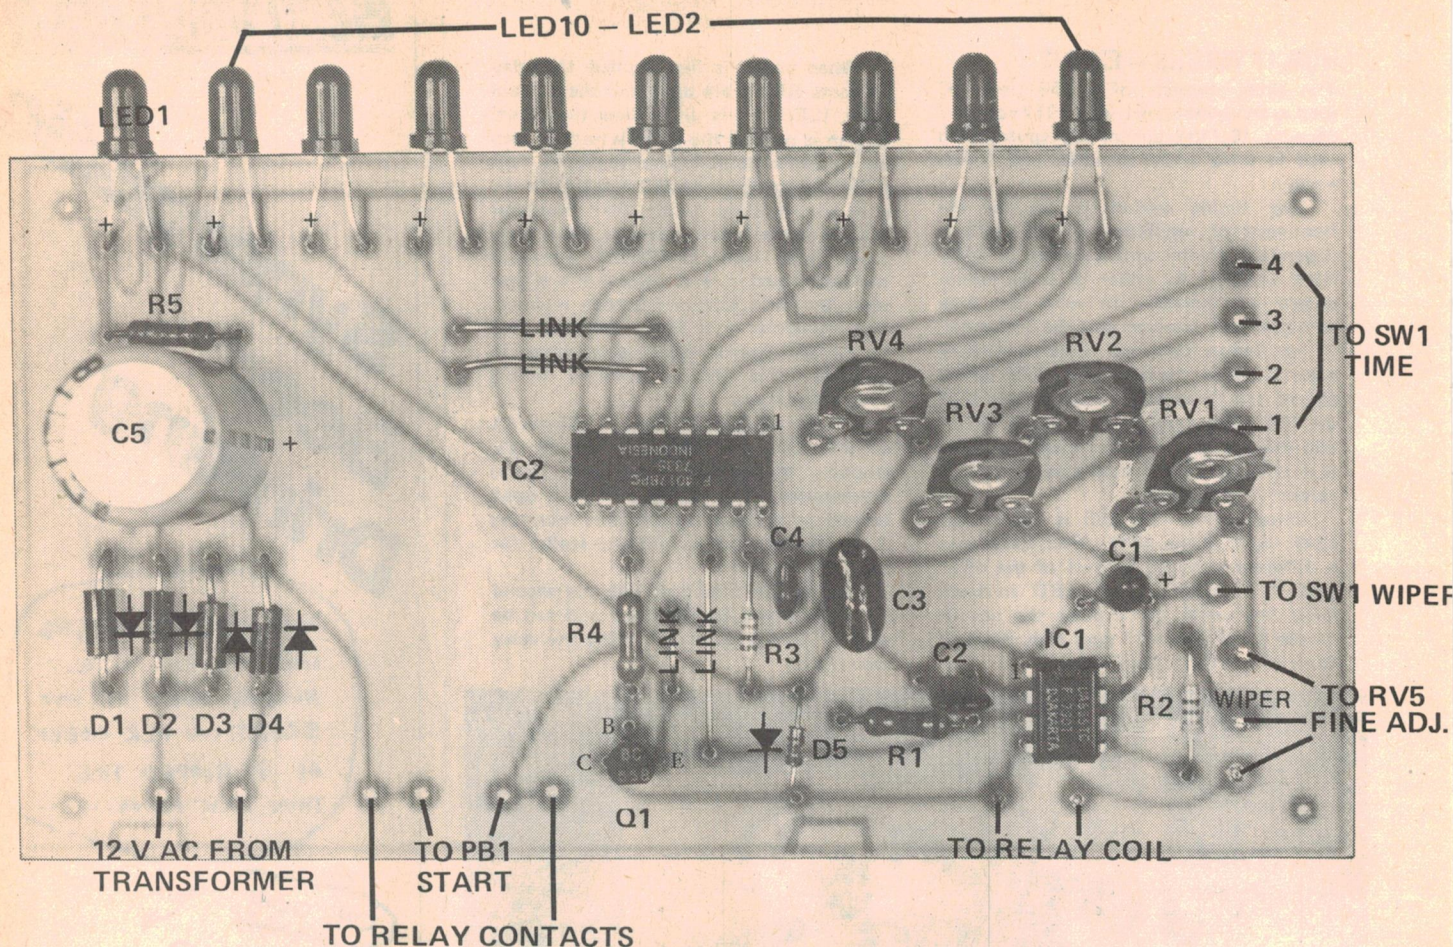

with the timer will determine the type of relay you use. This unit is capable of driving quite large relays, however, we used a commonly available Omron type having contacts rated at 10 amps.

Construction

First, you will have to determine from the table the correct values of RV1-RV4 and C1 to provide the times you want for your application.

Next, mount all the components taking care to correctly orientate the semiconductors. The LEDs are best mounted by inserting them into their holes and bending them over flush with the edge of the pc board. The photo shows the way I mounted the LEDs.

The completed unit can be mounted in a variety of ways to suit individual applications. Either in a box, together with its relay and a mains female output socket for the switched output, or on a panel with a remote transformer and relay as I did.

To mount the unit against a front panel, drill a row of ten holes for the LEDs and four holes to line up with the trim pots for screwdriver adjustment of the timing. The start button, timing switch and fine adjustment pot can be mounted anywhere convenient. The pc

PARTS LIST - ETI 573

Resistors

all $\frac{1}{4}W$, 5%
 R1 1M2
 R2 4k7
 R3 10k
 R4 4k7
 R5 1k

Potentiometers

RV1-RV4... See text
 RV5 10k lin pot

Capacitors

C1 See text
 C2 10n greencap
 C3 100n greencap
 C4 10n greencap
 C5 470 μ 25V electro

Semiconductors

D1-D4. IN4004 or sim Power Diode

D5 IN914 or sim

Q1 BC558, BC178, DS558

IC1 555

IC2 4017

LED1-

LED10..... TIL220R or sim LED

Miscellaneous

SW1. One pole, four pos. oak switch
 PB1. Momentary Push Button
 T1. 12V, one amp transformer (Ferguson type PS12/15 VA or sim.)
 RL1. 12V relay with two changeover contacts, Omron type LY2 or sim
 ETI 573 pc board, knobs, suitable box or bracket.

board should be mounted against the panel so the LEDs protrude through the holes.

Setting up

Having assembled the unit, all that remains is to calibrate the ranges. This is easily done with the aid of the second hand of a watch. For shorter times, say under five seconds, an oscilloscope is best.

Simply monitor the positive supply after the relay contacts RL1/1 and measure the time the contacts operate. For other purposes it may be best to set the ranges by trial and error, such as when the unit is being used for a pc board or Scotchcal development timer. In either case, the fine adjustment control should be set in its mid position when calibrating.




KNOCK-OUT VALUE

+ MAD PRICES

OCTOBER BEST BUYS

SAVE YOU HEAPS.

AUDIO
5CH STEREO
MIKE MIXERS



\$69 WITHOUT CUE FACILITY
\$85 WITH CUE FACILITY

THE DISCO WORLD'S BEST SELLER!
2 Hi-Le. mike inputs • 2 Mag-Ceramic phono inputs • Tape-Tuner Inputs • Twin VU meters • Compact 26x20x6-5cm • 2V Batteries, ext. DC in socket • Stereo Mono operation • Independent CUE for each channel • BUY NOW - introductory prices

BARGAIN BUYS

5 Metres **SPEAKER CABLE** Colour-Coded 50c
INTERCOMS, 2 way To Cables 12c
DIP PLUGS 14-pin 15c
Top Quality Gold plated pins
MONO Rec/Play HEADS only 4-50c
MONO Erase HEADS popular 2-50c
12v Motorised **CAR AERIAL** 16c
Top quality chromed, reduced from \$21
LOCK-DOWN CAR AERIAL 3c
TURNTABLE BASES 3c
Were \$7.50, sorry personal shoppers only!
Push-Button TUNER FOR CARS 2.00
4 Cells, perm. battery Tuner, sync. dyno
Cassette Rec. DRIVE BELTS EA \$1.00
Suits most popular tape recorders
TV TUNER Made by GEAR! 5c
12 Channels, 9 Biscuits
5" HI-FI Midrange Speaker 2 for 7c
TWIN-CONE, 8/15A, 4KHz-19KHz
EDGE CONNECTOR 80 way for PCs 1.00c
Top quality with reducer 2 for 1.00c
5x TO-3 MOUNTING KITS 5 for 5c
Includes mica washers, bushes, screws, nuts!
50x PLASTIC POT-WASHERS 1.00c
12Vdc RELAYS SPDT 170a coils Hermetically sealed 1.00c
In-dash Car Speaker FADERS 2.00c
Balance front/rear speakers (A) STEREO type
200 ASSORTED HARDWARE PAK 2.00c
Mixed nuts, bolts, screws, washers etc.
10 G.P. KNOBS black, brown, or white 1c
10 Way Comparator SWITCH 4-50c
10 Interlocked SPDT 150stat switches, was 16.50

COMPUTER * BOARD SALE

A SPECIAL PACK OF 10
BOARDS WITH APPROX
600 PARTS FOR \$5
LESS THAN 1c PER ITEM FOR:
300 RESISTORS mostly 2% TOL. IDEAL FOR
220 DIODES Various germ. IDEAL FOR
70 TRANS ToS and silicon perma. HOBBYISTS,
30 ELECTROS highest quality EXPERIMENTERS.

5" TV TUBE
150C84 \$5.95
NEW! LAST FEW. 2 for \$11 or

BELOW COST
T-Table 7" 240v PLAYER
\$6
BUILD THE KIDS A STEREO
THESE T-TABLES WERE OVER \$12

SOCKET SPECIAL
14 PIN 16 PIN
DIL 5 for \$1 4 for \$1
PLUGS 14 or 16 PIN to suit 10c

Speakers
2 1/2" 4x4" 15w 1.50
5" 3.5w 1.50
5 1/2" 4" 1.50
6 1/2" 15w 1.95

\$12 100,000uF
16Vw QUALITY
ELECTROS 10+
New Siemens \$10 EA

MINI H.D. RELAY
700Ω COIL, 10 AMP
CHANGEOVER CONTACTS
\$1 ea or 10 for \$8

ETI-470, 471 AMP KITS
ETI-470 - 60W POWER AMP 19.95
KIT incl heatsink etc
ETI-471 - SERIES 440 STEREO 16.00
PRE-AMP KIT incl 16.00
POWER SUPPLY KIT complete 33.00
All quality parts supplied as per parts lists.

PHILIPS TRIPLERS
FOR COLOUR TV QTY
Pho 6-41-444 1.99
As used in Pye, Philips,
Krisler etc and most
German colour TVs. 10 + \$10 EA

4 POLE 6 POS. ROTARY SWITCH
Famous 'DAR' brand
by MSR std. 4 shaft

Telescopic Aerial
FOR PORTABLE TVs
TOTAL LENGTH 3' 6"
ONLY 1.75c

Jackpot No 3
Hundreds of useful parts
Over 2Kgm 100%
A New jackpot box full of 100's
of samples, specials, end-of-line
specials, manufacturers over-run

WOW! HIGH QUALITY 4mm STACKING BANANA PLUGS
No soldering needed!
Spring-loaded terminals
plus 2 stacking holes!
Usually worth DOUBLE

AY3-8500 TV GAMES IC
by GENERAL for 6 GAMES
New, prime quality ICs.
Now build your own TV
game at lowest cost!

MEL-12 PHOTO-DARLINGTON TRANSISTORS
SCOOP PURCHASE
NEW PRIME SPECS. \$1 EA

20W STEREO AMP
BASS, TREBLE, BAL, VOLUME
10w RMS in 8Ω, 500mV
input for Xtal or Ceramic
cartridge, 0-5% distortion.
AMPLIFIER ONLY \$19.95
MAG. PRE-AMP KIT \$8.50
SPARES & CIRCUIT AVAIL!
BUY NOW! LAST FEW AVAILABLE

Jackpot No 3
Hundreds of useful parts
Over 2Kgm 100%
A New jackpot box full of 100's
of samples, specials, end-of-line
specials, manufacturers over-run

2W+2W STEREO AMPLIFIERS
Volume, tone control
all parts on PCB
2x LM-380 ICs
12V-18V supply, add
only transformer if
required (extra \$4.50), 100mV input, T.H.D.
1% at 1KHz at 1-5W. Ideal mounting under
turntable for cheap home stereo!

SUPER SAVERS

ENGINE ANALYZER
MEASURE VOLTS
0-16, AMPS 0-60
RPM 0-12000/160
00, POINTS TEST
DWELL ANGLE etc
TEST 4, 6 or 8 CYLINDER

LIGHT DIMMER KITS
OR MOTOR SPEED CONTROL
700 watt capability
WITH RFI SUPPRESSION 2 FOR \$9.00

PUSH-BUTTON DIALER
5w MEMORY (not approved)
EASILY FITTED

6 Watt STEREO AMP
3w+3w Amplifier
with wood-grain
base suit BSR or Garrard
turntable. Volume, Bass,
Treble controls, h/phone
3 din sockets, 8-15a spkr's.
All parts and instructions
supplied, easy to install.

BEAMS
for 27MHz
Easy convert
to Ham Bands
4x Gain
6 Element Dual 105
4 Element Quad 135
PRICE

6-5mm Line Skt 15c
5-5mm Panel Skt 10c
6-5mm Line Skt 10c
Mono 40c Ster 55c
2-1mm DC plug 15c
2-1mm DC Skt 20c
6-5mm Stereo 40c
Panel sockets 40c
RCR twin panel 30c

New
Products
Elec. Aust **DREAM 6800**

COMPLETE KIT + INSTRUCTIONS
• Fibreglass PCB with component overlay,
• Pre-programmed 2708 • Base, perspex
cover, mounting hardware, all parts
supplied as in parts list.

WITHOUT KEYBOARD \$122.50 \$135 incl 5/7ax
WITH DIGITRAN \$135.50 \$149 incl 5/7ax
KLOOG3 KEYBOARD \$35.50 \$38.50 incl 5/7ax
KIT incl. chassis
OPTIONAL RF MODULATOR ONLY \$3.50

EXTRA LOUD! LATEST ELECTRONIC SIREN MODULE
12v for cars 8w output
EASY TO INSTALL FOR ALARM
MODULE ONLY \$19.99
WITH SPEAKER \$29.99

New 'HORNY' SPEAKERS
FOR SIRENS, ALARMS, or PA
3 1/2" 5W Metal \$8.25
5 1/4" 8W Plastic \$10.50
HEAVY DUTY MODELS
6" 15W All Metal \$21.50
8" W " \$25.75
8 1/2" W " \$25.75
12" 25W " \$38.50
BEST QUALITY, FULLY C'TEED
PA AMPS, MIKES ETC. AVAIL!

12v DIGITAL CAR CLOCKS
ALARM - GREEN DISPLAY
AM/PM - ABOVE/BELOW DASH

THE REVOLUTIONARY COMPACT QUARTZ CLOCK WITH BIG PERFORMANCE! \$24

SUPER-MINI 50W SPEAKERS
Suitable for CARS (with metal
kits included) or for HOME
use - solid matt black paint
aluminium - 4x 2way
speaker boxes
ONLY 176x112x112mm SIZE - REDUCED FROM \$169
75-20,000Hz, 4" FREE-EDGE WOOFER, 1" DOME
CHEAPER THAN A KIT!

20w POWER BOOSTER FOR STEREO
NEW AT THIS PRICE! \$16
AMPLIFY YOUR CAR RADIO/
STEREO - 2x 10w RMS POWER
4 TO 8Ω. INPUT AND OUTPUT
Distortion 0-2%, 11-16v Oper.
Easy to install under dash, out
of sight - Full parts supplied.

LED 2V BEZELS 60c 70c
6-5mm INSULATED MONO 45c
PHONO SOCKETS STEREO 65c


LATEST MINI FANS
for Computers etc!
3" PIXIE 75x75x30mm
4" WAFER 105x105x30mm
110v/240v models
SAE for data

BUY • ALL TEST GEAR AND SELL
• Elect. Parts STOCKS ONLY!
• Elect. MAGAZINES
BACK ISSUES 1970 ON
EA EA ETI, BUY 50c SELL 31c
Just send copies to Sfrathfield NSW rail. We mail
to you

MAD MAL PRE-PAK electronics
P.O. Box 43, CROYDON 2132
718 Parramatta Rd, Croydon N.S.W.
Ph: 797-6144 P/POST 10% ORDER VALUE

Supa-Specials

THE ETI COLLECTION

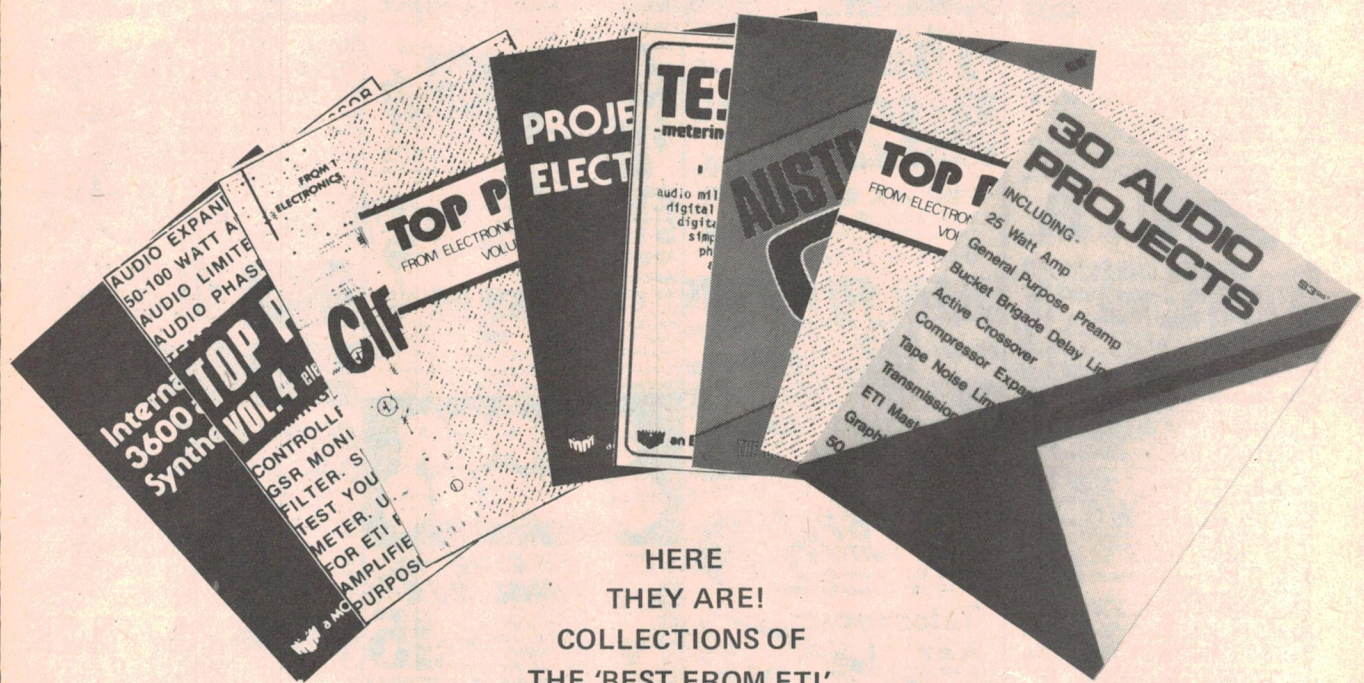

HERE
THEY ARE!
COLLECTIONS OF
THE 'BEST FROM ETI'

Forget leather-cased editions of Moby Dick, papyrus printings of ancient classics and first editions of Gone With the Wind! The dedicated electronics enthusiast puts an investment on his bookshelf with the ETI Collection — an investment in hours of pleasure in building and using projects that are backed by one of the world's largest electronics magazines.

From electronic music, through audio, to CB radio, the ETI Collection ranges the whole field of electronics.

How to Order

The books in this collection are available from most newsagents or directly from ETI. The only exception is the International Synthesizer book which is only available from us and a limited number of specialist suppliers — it is not sold by newsagents. Send your order, enclosing a cheque or money order (and including postage where appropriate), to:

**Electronics Today International
Subscriptions Department
15 Boundary Street
Rushcutters Bay, NSW 2011**

Test Gear

Your confidence to tackle more complex projects will increase dramatically if you have the right test equipment to troubleshoot, fault-find and generally understand the operation of the circuits you build. Why not build your own test equipment, saving money and learning as you go?

Contents include: Audio Level Meter, Impedance Meter, Audio Millivoltmeter, Simple Frequency Counter, Phase Meter, Temperature Meter, Audio Signal Generator, Audio Noise Generator, Tone Burst Generator, Crosshatch/dot Generator, RF Signal Generator, Logic Probe, Logic Pulser, Logic Tester, Simple CMOS Tester, Transistor Tester, Linear IC Tester, and many more.

Available from newsagents or directly from ETI.

Price: \$3.00 plus 45 cents post and packing.

ETI Circuits No. 2

This giant compendium of circuits has been assembled from the 'Ideas for Experimenters' section of Electronics Today and is packed full of ideas and suggestions for the experimenter. The chapter headings cover Alarms, Amplifiers, Automobile, Batteries, Comparators, Conversion Tables, Crossovers, Crystal Oscillators, Detectors, Digital, Filters and so on.

Whenever you're looking for a circuit, this is the book to turn to.

Price: \$2.95 plus 45 cents post and packing.

30 Audio Projects

For the Audiophile who wants good sound at a good price plus the satisfaction of having built it himself, 30 Audio Projects is required reading. The contents include our most popular audio projects: 25 watt Amp, General Purpose Preamp, Bucket Brigade Delay Line, Active Crossover, Compressor Expander, Tape Noise Limiter, Transmission Line Speaker System, Master Mixer, Graphic Equalizer and the 50/100 Watt Amp Modules.

If you're building up a system from scratch, or if you're contemplating some additions for your system, you'll find them here. Available from newsagents or directly from ETI.

Price: \$3.95 plus 70 cents postage and packing in NSW (80 cents in other states).

Top Projects Vol. 4

Available from newsagents or directly from Electronics Today International this book, published in June 1977, contains the following projects: Audio Expander/Compressor, 50/100 Watt Amp Modules, Stereo Amplifier, Dynamic Noise Filter, Audio Phaser, Audio Limiter, TV Game, Swimming Pool Alarm, Temperature Alarm, Active Antenna, GSR Monitor, Universal Timer, Mini-Organ, GP Power Supply, Temperature Meter, Train Controller, Car 'Scope Testing.

Price: \$3.00 plus 45 cents postage and packing.

Simple Projects Vol. 2

A collection of some of our most popular, less complex projects. Includes: Induction Balance Metal Detector, Train Controller, Telephone Bell Extender, Photographic Strobe, Transistor Tester, Selecta-game, Breakdown Beacon, Simple Loudness Control, Touch Switch, Courtesy Light Extender, Rev Monitor/counter, Auto-amp, Car Alarm, General Purpose Power Supply, Code Practice Oscillator, Emergency Flash, Drill Speed Controller, Three Simple Receivers, One-transistor Radio, Mini-organ, Accentuated Beat Metronome, Active Antenna, Simple Intercoms, as well as constructional information, and lots of helpful data on component markings and values.

Available from newsagents or directly from ETI.

Price: \$2.95 plus 45 cents post and packing.

Top Projects Vol. 5

Once again, this 'Best of ETI' publication is available from many newsagents or directly from ETI. Published in 1978 it is crammed with projects: Shutter Speed Timer, Ultrasonic Switch, Accentuated Beat Metronome, Marine Gas Alarm, House Alarm, White Line Follower, Induction Balance Metal Detector, Photographic Strobe, Simple Compressor/expander and CB Power Supply.

Price: \$3.00 plus 45 cents post and packing.


PROJECT BUILDERS DON'T RISK IT!

For safety's sake use
transformers designed to
Australian Standard Codes
like
Ferguson Transformers

TWO POPULAR RANGES


20/40/60VA Low Profile

A compact range with ratings from 6 to 40V and a 20VA multi-tap.



5VA PCB Mounting

Designed to standard 0.1" grid. Double insulated, very compact with ratings from 4.5V, 1.11A upto 40V at 0.13A.



MADE IN
AUSTRALIA
TO AUSTRALIAN
STANDARDS

Available from Electrical and
Electronic Stores or write to;


FERGUSON

FERGUSON TRANSFORMERS PTY LTD
331 High Street, Chatswood N.S.W. 2067

The electromyogram — part 2.

David Tilbrook

This month we present construction details and some suggestions on using the instrument

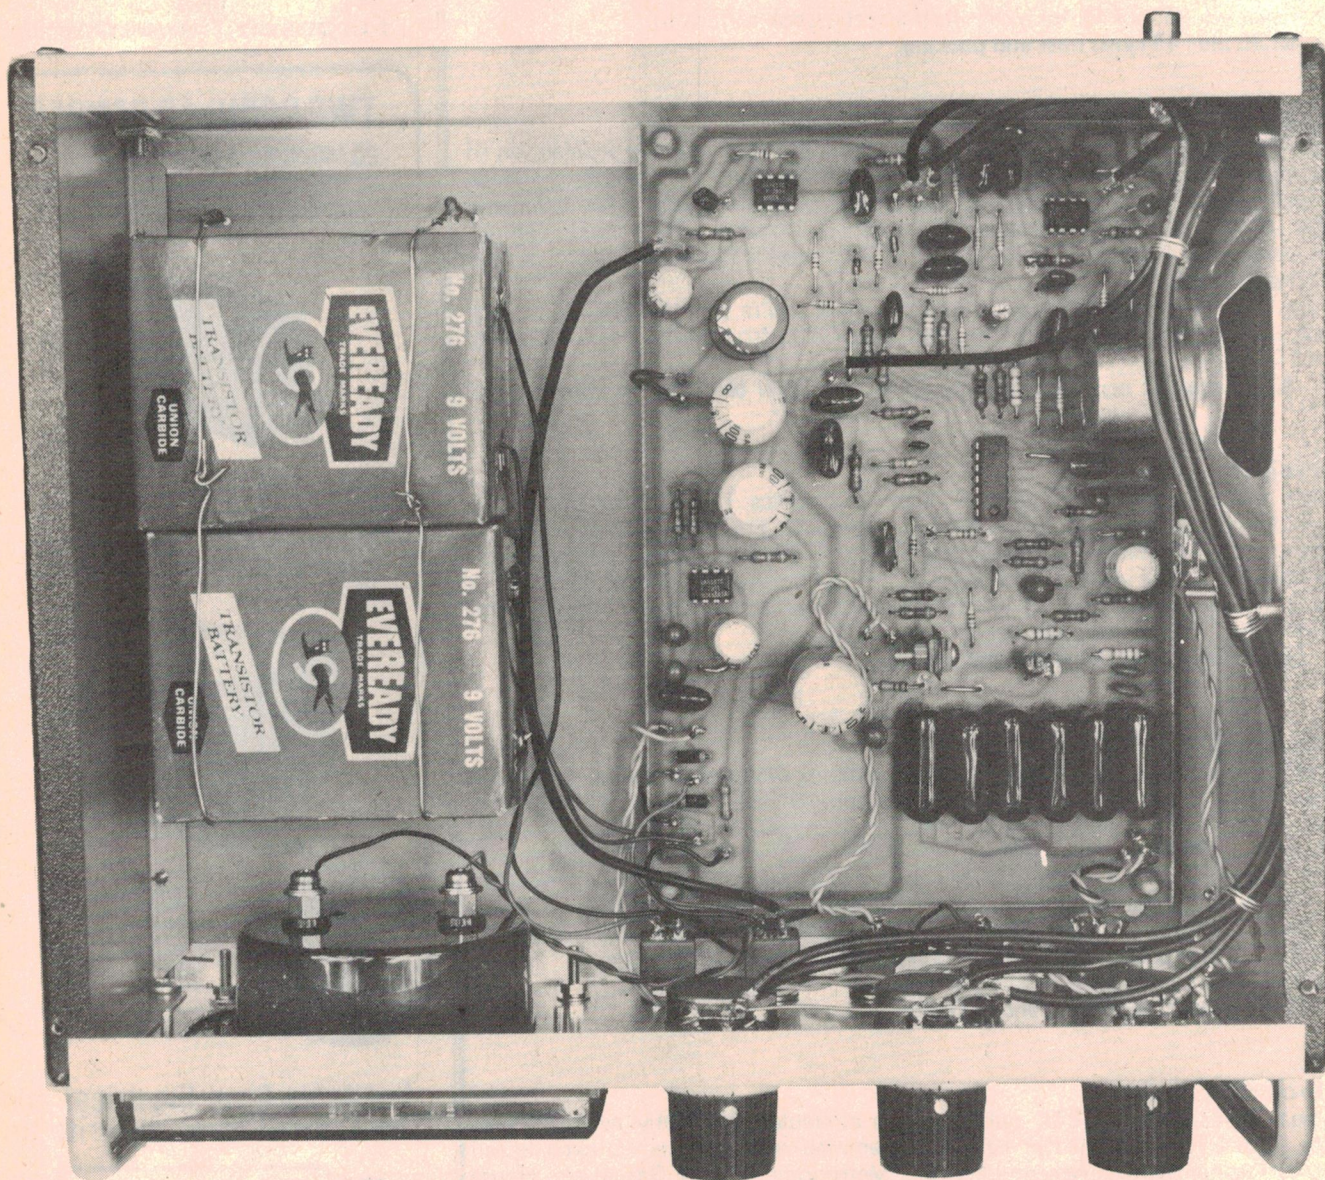



OUR PROTOTYPE was housed in a Horwood instrument case measuring 254 mm wide by 203 mm deep by 102 mm high. These are available from quite a few component suppliers but any box with similar dimensions should suffice. The advantage of this particular case is that it is supplied with steel top, bottom and side panels which provide better shielding from stray hum fields than does aluminium.

Construction is best commenced with the pc board. This method of construction is recommended as layout of the various stages is critical to avoid feedback or interaction between stages as one LM3900 package does sterling service in several parts of the circuit!

Assembly of the pc board should start with the resistors and capacitors. I found it easier to leave the six 1 μ F input capacitors until the input transistors (Q1-Q4) were mounted. Be sure to check the polarity of the electrolytic and tantalum capacitors.

Finish loading the pc board by inserting the diodes, transistors and ICs. The input transistor pair, Q1 and Q2, must be mounted so that their flat faces are touching to provide thermal coupling. The best way to do this, to avoid straining anything, is to solder only the collectors and emitters of Q1 and Q2 at first. Smear some thermal paste on the two flats and then tie the two transistors together using a link of enamelled (coil) wire — this prevents the possibility of shorts to the transistor leads should the loop slip off at some time. Tighten the loop by taking the

ends in a pair of pliers and twisting until the transistors are held tightly together. Once this is done, solder the base leads.

The two BD140s, Q3 and Q4, also need to be mounted together. As they are in TO-126 packages they may be bolted together. It is necessary to use an insulating washer between them to prevent the collector contacts touching. Use thermal paste to improve the thermal coupling.

Once these devices are mounted, six 1 μ F input capacitors may be soldered into place.

If you use pc board pins, the external connections to the board may be made after it is mounted in the case, otherwise, now is the time to attach all the leads going to the externally-mounted components.

As high gain stages are used in several places, the circuit is sensitive to noise or signals radiated from other parts of the board. The 555 VCO output can be especially troublesome, so use shielded cable to connect the output of the 555 to the volume control. The only resistor not mounted on the pc board (R50) is mounted between the wiper terminal of the volume control and one of the loudspeaker terminals.

There are a number of other connections that should be made with shielded cable and these are shown in the wiring diagram.

There is sufficient room inside the cabinet to accommodate a variety of 9 V batteries. The type of connection to the battery will depend on the particular style of battery used.

The speaker is mounted on one side of the cabinet and the monitor output (and RCA coax socket) is mounted on the back.


On the front panel, the switches should be mounted first, followed by the pots and the meter. Juggle the pc board into the case last.

Electrode construction

Although the common mode rejection of the input is better than 100 dB this will be degraded drastically if the contact to the skin is not good enough. To enable the input stage CMRR to effectively reduce 50 Hz hum it is necessary to ensure that the hum is exactly the same level on both inputs. For this reason the construction of the electrodes is very important.

The diagram on page 65 shows the electrodes we built. Three lengths of shielded cable were used (RG174 coax). The two input leads are made by soldering the centre conductor of the shielded cable to small metal discs about the size of 5c pieces. Cut the earth braid back enough so that it cannot touch the electrode. The braids of the two input cables are connected to pin 2 of the five-pin DIN plug (the grounded pin). This pin is also connected to the shield of the third cable which becomes the ground electrode. The centre conductor of this cable is not used and the other end of the braid is soldered to another metal disc. Use a slightly larger disc (about the size of a 10c piece) as this helps to ensure a good ground connection to the body.

H — TO MONITOR OUTPUT
RCA SOCKET ON BACK PANEL

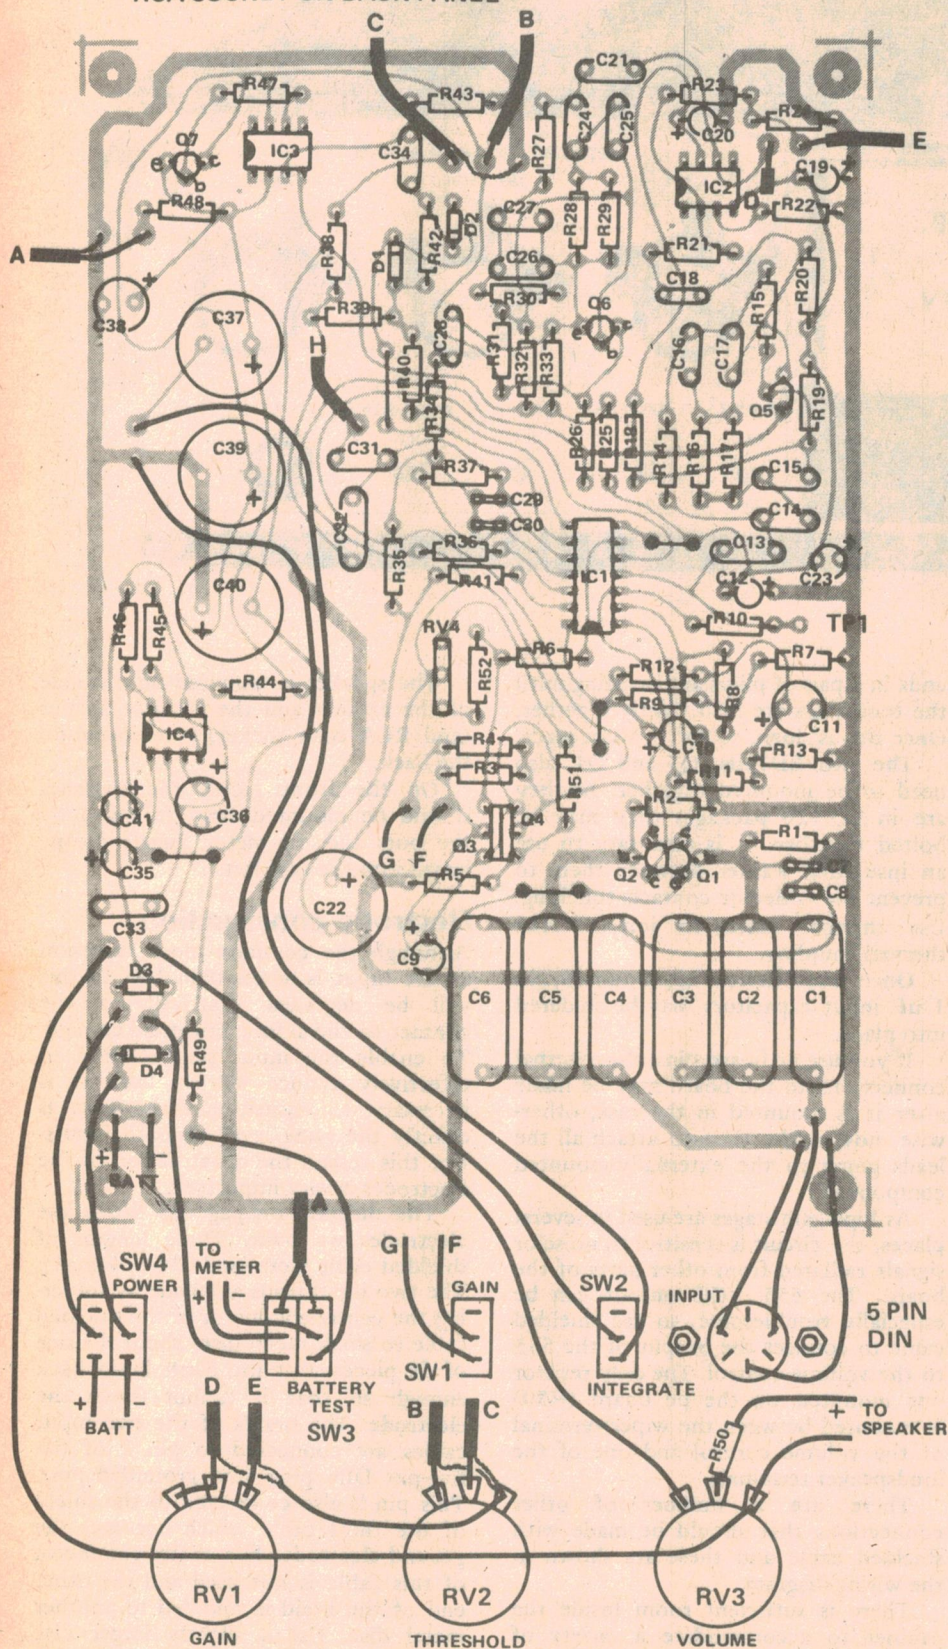


How to use it

Before powering up, check the pc board. Check the orientation of all the polarised components — electrolytic and tantalum capacitors, transistors, ICs and diodes. If everything is all right, switch the unit on with the battery switch in the test position. With 9 V batteries the meter should read about 9. If the battery switch is now switched off the meter should immediately fall to zero, provided the gain control is turned fully down. If the volume control is turned to full on a slow clicking should be heard. Now, measure the voltage (with respect to earth) at the test point (TP1) at the output IC1a (pin 4). With the x10 switch in the x1 position adjust the preset pot to obtain zero volts.


If the gain control is now increased, the meter reading will move along with the frequency of the clicks.

Now, advance the threshold control and the meter reading and click frequency should decrease. This threshold control works by varying the minimum signal required to cause a meter response. The higher the threshold control is set, the higher the input signal must be to cause a meter response. The threshold can be set just above the noise level so that even a very small input signal can be detected.


The electrodes can now be connected to the body and plugged in. The ideal way to secure the electrodes to your skin is to use a band of Velcro (Tm) tape, although we found Band-aids okay. If all three electrodes are placed reasonably close to each other along the inside of the arm (earth between the others) they can be secured in place all

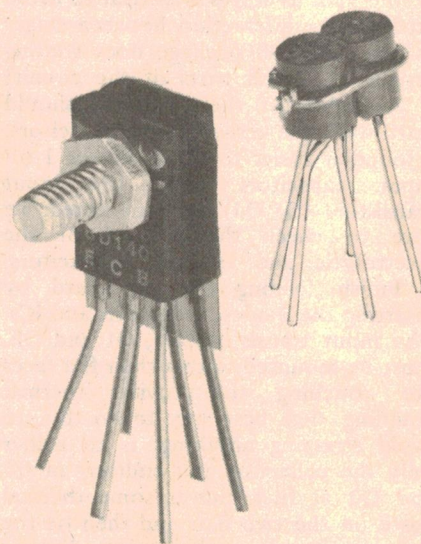

Thermal stabilisation is achieved by mounting the input transistors together as shown and described in the text. Note the insulating piece between the BD140s.

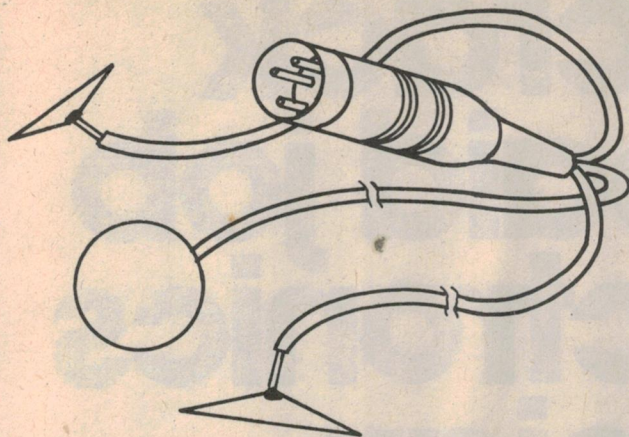

The three electrodes.

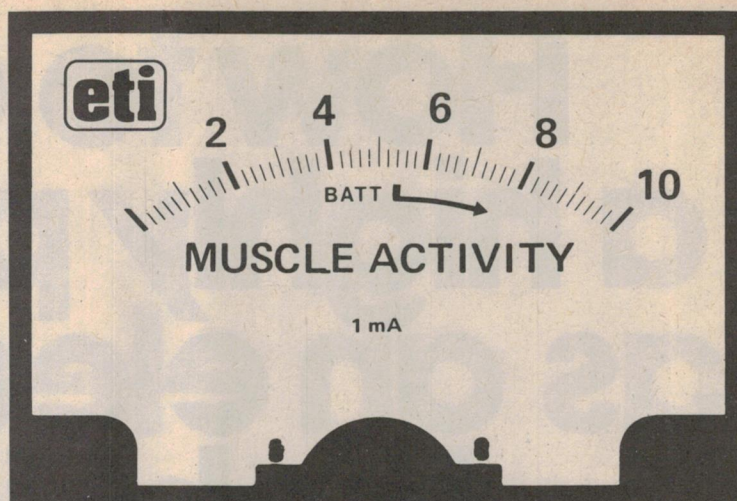

Full size reproduction of the meter scale.

at once with a single wide band of Velcro wrapped right around the arm. Some electrode paste may be used between the electrodes and the skin to improve the contact. This is available from some distributing chemists and medical suppliers, although it is relatively expensive. We found moistening the electrode to be a good alternative.

Once the electrodes are attached to the arm and plugged into the EMG monitor a reading should be easily obtained. Start with the gain and threshold controls set fully anti-clockwise, the gain switch in the X1 position and the integrate switch off.

If the arm is tensed the meter should indicate muscle activity readily. With these settings the EMG is really acting as a strength meter. Relaxing the arm, the gain switch can be switched to the x10 position and the gain control slowly increased. With each gain increase, the threshold can be increased slightly to cancel any increase in noise that may have occurred, although don't overdo the use of the threshold control until you are familiar with the unit as it is easy to cover up muscle activity as well as noise.

Eventually you should reach a stage such that the gain control can be set at maximum but with muscle activity held

so low that the meter reads about 2 to 3.

This isn't easy! In fact the only person who has been able to do this so far has been Tom Benjamin, the author of our article on biofeedback, and quite a few of us have tried!

Some experimentation with electrode placement will indicate how to get good results on particular muscles.

For some background reading on EMG instruments, an article in the March/April issue of "Physiotherapy Canada" (published by the Canadian Physiotherapy Association) on EMG biofeedback, pages 65 to 72, gives an overview and a very comprehensive list of references.

PARTS LIST - ETI 576

Resistors all ½ watt, 5%

R1, R2	220k
R3	4k7
R4	100R
R5, R6	2M2
R7	4k7
R8	1M
R9	4k7
R10, R11	1M
R12	1k
R13	8k2
R14-R17	47k
R18	220k
R19	270k
R20	10k
R21	100k
R22, R23	1M
R24	10k
R25, R26	100R
R27-R30	47k
R31	220k
R32	270k
R33	10k
R34	330k
R35	560k
R36	5M6
R37	3M3
R38, R39	10k
R40, R41	1M
R42	10k
R43	390k
R44	470k

R45	1k
R46	680R
R47	10k
R48	2k7
R49	18k
R50	27R (mounted on volume pot)

Capacitors

C1-C6	1μ greencap
C7, C8	1n greencap
C9, C10	33μ 16V tantalum
C11	100μ 25V electro
C12	33μ 16V tantalum
C13	100n greencap
C14-C17	68n greencap
C18	22n greencap
C19, C20	33μ 16V tantalum
C21	100n greencap
C22	1000μ 25V electro
C23	33μ 16V tantalum
C24-C27	68n greencap
C28	47n greencap
C29, C30	1n greencap
C31	100n greencap
C32	220n greencap
C33	150n greencap
C34	100n greencap
C35	33μ 16V tantalum
C36	100μ 25V electro
C37	470μ 25V electro
C38	47μ 25V electro
C39, C40	1000μ 25V electro
C41	33μ 16V tantalum

Semiconductors

D1, D2	IN914 or sim
D3, D4	EM401, EM4001, IN4004 or sim
Q1, Q2	BC559, BC179, DS559
Q3, Q4	BD140
Q5-Q7	BC549, BC109, DS549
IC1	LM3900
IC2, IC3	741
IC4	555

Potentiometers

RV1	1M linear
RV2	5k linear
RV3	1k linear
RV4	1k vertical mounting trim pot


Switches

SW1, SW2	SPST miniature toggle
SW3, SW4	DPDT miniature toggle

Miscellaneous

M1	1mA meter, 100 mm x 80 mm, square face MRA 65B or similar;
5-pin DIN socket; 8 ohm small speaker; panel mounting RCA socket; two 9V batteries type 276 or 2364; knobs, instrument case Horwood 203 x 102 x 254 mm or similar; power cord and plug.	

How to crack a highly paid job as an electronics technician.

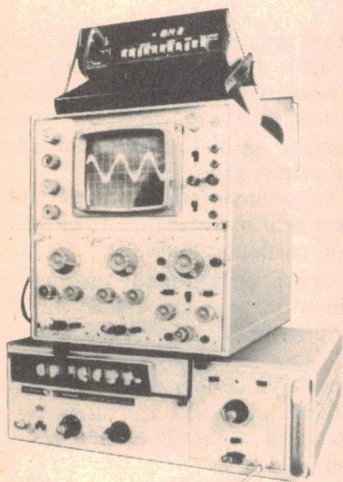

We'll give you excellent training - as good as you'll get anywhere in Australia.

We'll give you free medical, dental and hospital treatment.

We'll provide plenty of good tucker and a comfortable place to stay.

We'll give you substantial leave, and on top of all that, we'll pay you well while you're training.

On your side, you'll give us a period of hard, but interesting and rewarding work. And, when eventually you leave us, you'll find yourself a fully qualified and experienced Electronics Technician. Not a bad thing to be, these days.

So, if electronics is your idea of a great career and you are (at time of entry) approx. 15 to 17 for apprenticeship

and over 17 for an Adult Trainee, join the Navy, Army or Air Force.

Phone us at:

Adelaide 223 2891. Brisbane 226 2626.

Canberra 822 333 Hobart 34 7077.


Melbourne 61 3731. Perth 325 6222.

Sydney 212 1011.

Write to either the Navy, Army or Air Force Electronics Technician Counsellor, GPO Box XYZ in your nearest State Capital City (please

include your date of birth).

**Learn
Electronics
with us.**

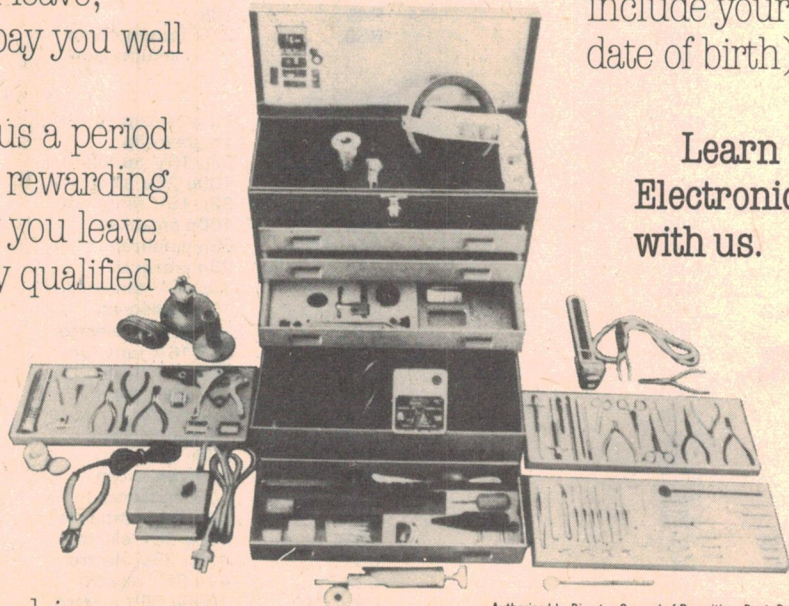

Authorised by Director-General of Recruiting, Dept. Defence.
TSAP15.FP.48

We have a computer system to meet your needs and suit your pocket . . .

The CBM™ Computer Business System

2023 Friction feed

Tractor Feed Printer




2001-16/32



AUTHORISED DEALER

Dual Drive Floppy Disk

2040



CBM™ with built-in VDU and full size typewriter keyboard

16K 2001.16	\$1829
32K 2001.32	\$2199
Dual drive floppy disk, huge 340K 2040	\$2099
Tractor feed printer, 2022	\$1699
Friction feed printer, 2023	\$1499
External cassette	\$149

Free programs to value of 5 percent of order. Full details & coloured brochure available.

Commodore PET

The best personal computer — 8K expandable to 32K.
\$1495

only \$1450


plus a free course in Basic too.
Sales tax exempt price to schools only \$1250.



CANON AX1 and BX1


Self-contained desk computers with fantastic programs for business, farming, etc.

Expandable to VDU, printers, extra disks, etc.



TEXAS PROGRAMMABLE SYSTEMS

STILL ON! The greatest package offer ever!!
A Ti59 and PC100C printer \$685 only \$450.



(\$509 with sales tax). See June ETI for details of software modules and packets, etc. Registered post \$3.50 for NSW, \$5 elsewhere.

FREE ADVISORY SERVICE FOR ALL ETI READERS — phone or write, specifying your requirements. We will send brochures, full details, discount price, leasing, software, etc of suitable systems. If possible we will arrange a demonstration, and we can organise delivery anywhere in Australia.

END-OF-YEAR CALCULATOR SALE — Price list available


Ideal for studies, research, business decisions, statistics, navigation and fun.

ELECTRONIC CALCULATOR DISCOUNTS


Phone (02) 624-8849 (8 am till 3 pm), PO Box 106, Baulkham Hills, NSW. 2153

AUDITEC POWER 25-250 WATTS


001 Mk.2 30 Watts R.M.S. Power Amplifier Module. Load 8 ohms. Less than 0.05 percent T.H.D. Fully short-circuit protected.




018 60 Watts R.M.S. at less than 0.1 percent T.H.D. Load 4 ohms. Fully short-circuit protected.




009 120 Watts R.M.S. at less than 0.1 percent T.H.D. Load 4 ohms. Fully short-circuit protected.



033 Very high quality 100 Watts R.M.S. Power Amplifier for studio work etc. Distortion almost unmeasurable. T.I. distortion almost nil. Produces a subtle difference in sound which has to be heard to be appreciated.



027 250 Watts R.M.S. power amplifier module at less than 0.2 percent T.H.D. Fully short-circuit protected. 8 ohm balanced output.



For descriptive leaflets on these modules call phone or write to:

AUDITEC AUSTRALIA PTY. LTD.
10 Waitara Avenue,
WAITARA, NSW. 2077.
Phone 48-4116.
(Pacific Highway side of Waitara Station)


AUDITEC MAJOR STOCKISTS:

VIC: Zephyr Products, (03) 568-2922
QLD: Delsound Pty. Ltd. (07) 229-6155
SA: Neil Muller Pty. Ltd. (08) 272-8011
WA: Willis Trading Co. Pty. Ltd. (092) 321-7609
ACT: Musique Boutique (062) 81-5255
NT: Darwin Communications Systems (089) 85-3184
Farmer & Davies Electronics Alice Springs 52-2967

OTHER AGENTS:

NSW: Hi-Fi Gallery. Tamworth, (067) 66-2525
Ray Walsh Sound Systems. Albury, (060) 21-1502
President Sound. Wentworthville, (02) 631-6689
W.M.R. Electronics. (02) 605-1203
Dawes Sound Systems. (047) 39-4421
D.R. Hi-Fi & Electronics. Dee Why, (02) 982-7500
Landers Music Centre Pty. Ltd. Orange, (063) 62-6515
QLD: Bundaberg Hi-Fi. Bundaberg, (071) 71-3176
Keller Electronics. Maryborough, (071) 21-4559
R.A.V.E. Mermaid Beach, (075) 38-3331

A FULL RANGE OF PREAMPLIFIERS, MIXERS AND COMPLETE AMPLIFIERS FOR PUBLIC ADDRESS, STUDIO AND HI-FI IS ALSO AVAILABLE

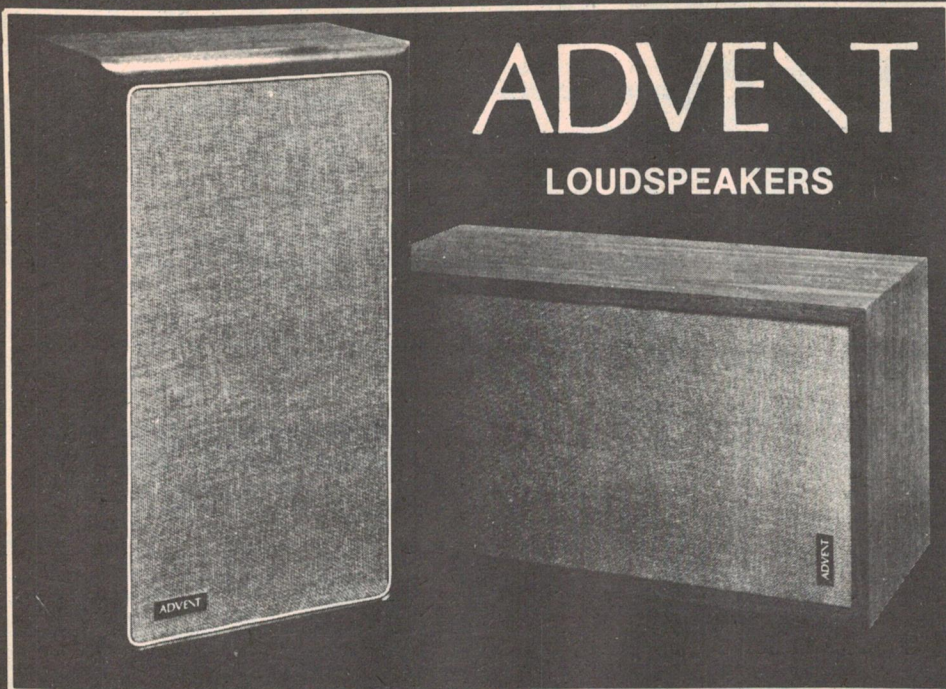

ADVENT

LOUDSPEAKERS

From the new Advent Loudspeaker (N.A.L.S.) to the Advent 3, there are 5 models. State-of-the-art speakers at budget prices.

Australian Distributors:

ADVENT LOUDSPEAKERS,
89 Carnarvon Street, Silverwater, NSW. 2141.
Phone (02) 647-1103.

AVAILABLE AGAIN!

Confirming old friendships with people who know and love them. And making many new friends.

Hear them at:

NSW: AUDIOCOM HI-FI


- Eastwood85-2726
 - North Rocks.....872-3829
 - Lindfield467-1773
- PARK HI-FI
- Sydney26-2798
 - Summer Hill799-2133
- WARRINGAH HI-FI
- Mona Vale.....997-5313

VIC: NATSOUND

- Melbourne.....67-8158
- THE SOUND CRAFTSMAN
- Nth. Caulfield509-2444

QLD: MANDO'S HI-FI

- Toowong371-5977
- SOUND CENTRE
- Coolangatta36-5443
 - Brisbane.....221-0821

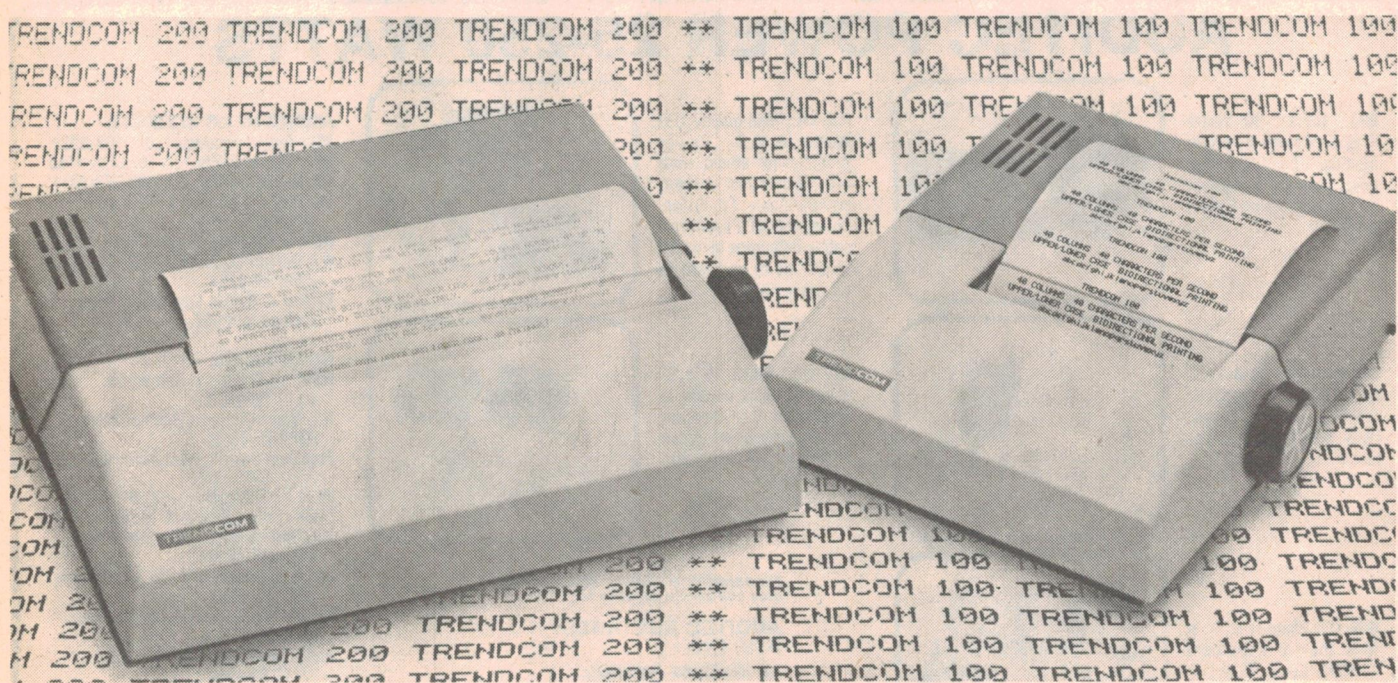

Trendcom 100 \$395

Trendcom 200 \$610

Word Processing from:

COMPUTERWARE

63 Paisley Street, Footscray, Vic. 3011.
(03) 68-4200

*Plus sales tax

Lab Notes

An occasional series in which we discuss interesting circuit techniques, circuits we have tried in our own laboratory but not developed as a project, practical notes on projects, measurement techniques for hobbyists etc.

The ETI-III IC power supply revisited

WE RECENTLY received a letter from a reader who had built a number of our ETI-111 IC Power Supply projects (keen lad . . . Ed.). Now this versatile little unit was first published in our November 1972 issue and subsequently in our 25 Top Projects and Test Gear books.

Based on the common 723 regulator IC, the supply is variable between 1.5 and 15 volts and will deliver up to 1A maximum current. It was designed to be simple to construct with a number of optional configurations (fixed, variable or preset output) and has surprisingly good performance.

Our reader, Mr. T.J. Greenfield, has pointed out a number of drawbacks in the original design — which we think justified in the light of developments since 1972 — which he set out to correct.


The original design called for a regulator IC in a metal can encapsulation. This happened to be the most commonly available type of encapsulation for 723s at that time. These are

now as scarce as tail feathers from a Dodo (or hen's teeth, whichever is the lesser), so Mr. Greenfield has designed another printed circuit to accommodate the standard 14-pin dual-in-line (DIL) package in which 723s are commonly supplied these days.


In addition, the 1972 design had the main 'series pass' transistor, a 2N3055, mounted on a heatsink, which assembly was mounted to the pc board instead of mounting the transistor on the case, but insulated from it. This construction method prevented accidental short-circuiting of the 2N3055 — and subsequent destruction — certainly a consideration, being mindful of the 'universal' nature of the supply and that the project would likely be built by many newcomers to electronics.

Mr. Greenfield has made provision for the 2N3055 (or similar) series pass transistor to be mounted off the pc board. This allows a number of more flexible configurations for the power supply. The flat-pack style TIP3055, in

the TO-220 package, may now be pressed into service — these were not generally available until quite recently, and are very handy for applications such as this. A series pass transistor in this package may be mounted on the case which you might use for this project — providing ►

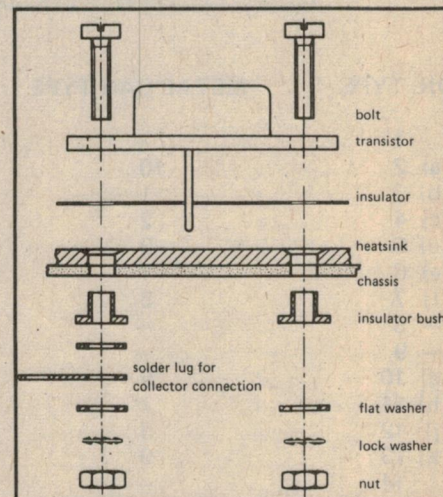


General mounting details for a TO-3 2N3055.

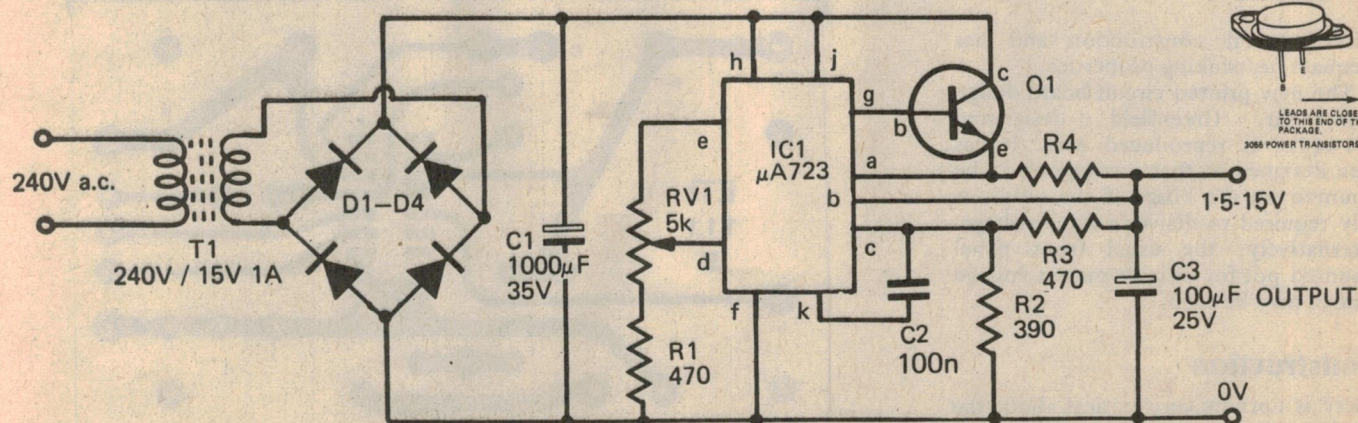

Pin numbers are not shown on the circuit diagram for the regulator IC as either DIL or CAN type packages can be used. A table for pin connections is shown on page 70.

Lab Notes

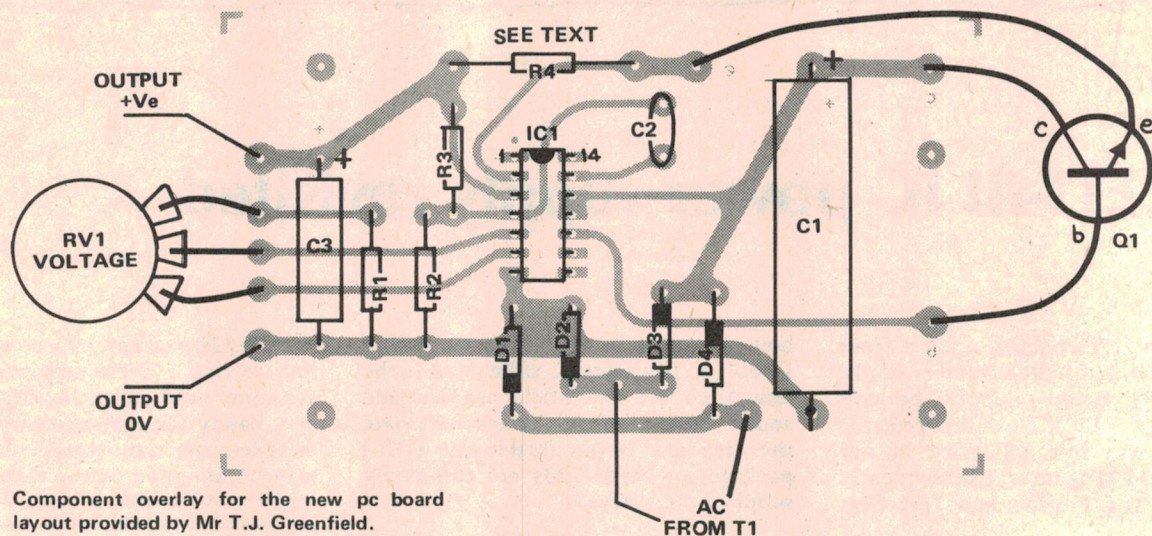

DIL TYPE	METAL CAN TYPE
1	—
a) 2	10
b) 3	1
c) 4	2
d) 5	3
e) 6	4
f) 7	5
— 8	—
— 9	—
g) 10	6
h) 11	7
j) 12	8
k) 13	9
14	—

capacitors is correct. Also, ensure that the series pass transistor (Q1) is correctly connected.

If less than the rated 1A current is all that is required, almost any small metal case used to house the unit should be more than adequate. Even the metal panel of a 'zippy' or 'jiffy' box would be adequate for currents of 300 mA or so.

The 723 alone will deliver as much as 150 mA which is more than adequate for a host of small projects and circuits.

When mounting a TO-220 flat pack series-pass transistor, take care to insulate it electrically — use one of the insulator/mounting kits available (refer

to the diagram to see how it's assembled). See that the mounting bolt, if exposed, is insulated from the metal part of the package to avoid the possibility of a short circuit (the rectifier would be shorted — which may not be good for its health).

Details for mounting a TO-3 style 2N3055 are also given here.

Selecting the current limit

By developing a voltage across pins 10 and 1 of the 723, its output voltage can be made to 'fold back' at a selected load current. That is, the voltage output starts to fall when the limit is


Pin cross connections for DIL and CAN TYPE 723 regulators.

it's of metal construction and has adequate heatsinking properties.

The new printed circuit board design from Mr. Greenfield, designated ETI-111B, is reproduced here. It has been designed so that a trimpot may be mounted on the board if the supply is only required to deliver a fixed voltage. Alternatively, the usual front panel mounted pot for variable output voltage control may be used.

Construction

There is nothing very critical about the construction of this project. Just take the usual precautions and see that the polarity of the diodes and electrolytic

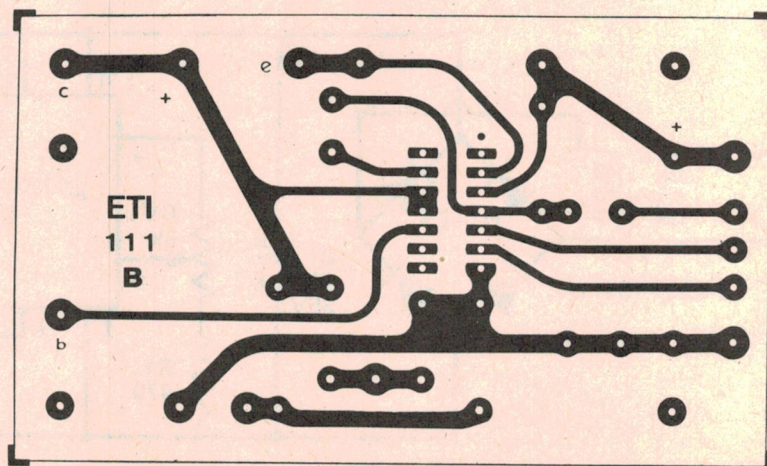

Full size printed circuit board artwork.

PARTS LIST - ETI 111B

Resistors all 1/2W, 5%
 R1 470R
 R2 390R
 R3 470R
 R4 Shunt resistor - see text

RV1 5k lin pot

Capacitors

C1 1000 μ 35V electro
 C2 100n greencap
 C3 100 μ 25V electro


Semiconductors

D1-D4 EM4001 or sim 1A
 power diode
 Q1 2N3055
 IC1 723 Regulator IC

Miscellaneous

T1 15V 1A transformer -
 Ferguson Type PL30/
 15VA or sim

Box to suit, ETI 111B pc board, termin-
 als, mica insulation and insulating bushes
 for transistor, power cord and plug.

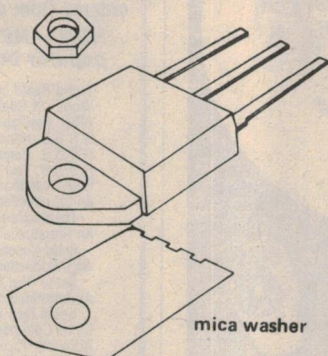

mica washer



insulator bush



TO220 PACKAGE
 Insulator and bolt
 assembly diagram

approached, finally falling to zero and hence protecting the power supply against destruction from overload.

By changing the value of R4 the 'foldback current' can be varied. If the resistor is switched, a number of current ranges may be included in the power supply. If you are testing a circuit which should only draw say 100 mA, the limit can be set just above this current to protect the circuit.

The table gives current limit values for common resistors.

R4	Limit
10R	65 mA
1R	650 mA
0.5R (1/2 ohm)	1.4 A
0.2R (1/5 ohm)	3.2 A

Mr. Greenfield says he has used his ETI-111 projects for: a slot car power supply, mini drill supply, a trickle charger and a general purpose power supply.

It's what you expect from Data Precision.
 Our 3 1/2 digit Model 935 full function DMM gives you
 0.1% accuracy on DC volts, as good as many lab/bench
 instruments, and equally high accuracy on all of its 29 ranges.
 All this comes in a palm-sized, lightweight package that goes
 anywhere to solve your measurement problems.
 It stays accurate too. Guaranteed for a full year
 between calibrations (by only one adjustment!). And even if
 you bang it around or subject it to large overloads —
 the 935 is designed to take it.

**MODEL 935. Unmatched performance
 at an unmatched price: \$149.00***

Available from stock at all Data Precision
 representatives.
 *Plus sales tax



ACCURACY

Where you need it.

DATA PRECISION
 Performance in the field.

Kenelec (Aust.) Pty. Ltd.

48 Henderson Rd, Clayton, Vic. 3168. Tel. (03) 560-1011. NSW (02) 439-3954. SA (08) 223-2420. QLD (07) 262-2223. WA (09) 444-5826.



Yes . . . Down-to-Earth computing at Down-to-Earth prices!!

We are already known for the supply of high quality products such as the George Morrow designed Thinker Toys boards. As **Automation Statham Pty. Ltd** our reputation was for selling these fine S-100 products at realistic prices and being able to back them up. It just seemed that our name was too hard to handle particularly on the phone so now it's welcome to **Planet 3 Systems**.

It's really the same company and we're proud to say the values are the same. Just look at some of these prices and remember that all our kits and assembled boards are FULLY SOCKETED, SOLDER MASKED BOTH SIDES, AND MARKED WITH COMPONENT OVERLAYS. THERE ARE NO OPTIONS IN THIS AREA TO "SUCK YOU IN"

FROM GEORGE MORROW, THINKER TOYS.

16K 4MHz Static Memory	\$299
16K Assembled Memory	\$339
32K 4MHz Static Memory	\$649
32K Assembled Memory	\$699
8K Dynamic 2MHz Memory	\$149

Discus 2D Dual density single disc drive system \$1174. Add on drives for Discus systems (double density) \$820 plus tax. Switchboard I/O board with 2 serial ports, 4 parallel ports, space for 4K of ROM and 4K of RAM \$199 as a kit or \$259 assembled. The optional RAM is only \$70 for 4K.

Optional Disk Software: Available only to Discus buyers are the following well known packages: ● Microsoft Disk Extended Basic \$300 ● Microsoft Fortran \$450 ● 2D CP/M for Discus 2D \$150.

General disk software includes: ● Standard single density CP/M \$125 ● CP/M User's Group Disks each \$10.

SPECIAL DEALS . . . WHILE THEY LAST

We have made arrangements with a U.S. Dealer to obtain supplies of some of the Processor Tech. S-100 boards you cried about when they stopped.

● Boards and manuals (no other parts) ● The famous VDM-1 Video Board 16 X 64 with Hardware Scrolling ● The 8KRA Static RAM board addressable on any 1K boundary ● The highly reliable CUTS 1200 or 300 Baud cassette interface. Each of the above has the original comprehensive manual and sells for only \$60 plus tax. ● Kits for the CUTS board may also still be available and include manuals for the board as well as the CUTER monitor and BASIC supplied on cassette. While they last only \$160.

● Some assembled and tested 8KRA boards are still available for \$140 plus tax. ● There is still a lot of software available to suit systems with CUTS boards and VDM-1 so grab these while you can. As these prices are way down orders will only be accepted with payment in advance for these indent items.

47 BIRCH ST, BANKSTOWN, N.S.W. 2200
PHONE (02) 709-4144. TELEX AA26770

A Division of Automation Statham Pty. Ltd. Trade Mark of Digital Research, U.S.A. All prices plus sales tax.

BOOKS

Just some of the books from the biggest range of radio and electronics books in Australia. If the book you require is not listed below, it can be ordered from us.

NEW - NEW - NEW Latest editions of some of the most popular books on the subject:

World Radio and TV Handbook	\$15.95
World DX Guide — 1st Edition (Ed. J.M. Frost)	\$9.95
ARRL Handbook 1979 edition (available now)	\$13.95
R.S.G.B. Handbook (New Edition) Volume 1	\$21.85
R.S.G.B. Handbook (New Edition) Volume 2	\$18.90
R.S.G.B. Test Equipment for the Radio Amateur	\$19.55
Radio Handbook — 21st edition (New Edition) (William Orr)	\$26.50
An Introduction to Microcomputers — Volume 0 — The Beginner's Book (Adam Osborne)	\$12.80
An Introduction to Microcomputers — Volume 1 — Basic Concepts (Adam Osborne)	\$12.80
An Introduction to Microcomputers — Volume 2 — Some Real Microprocessors (Adam Osborne)	\$29.00
An Introduction to Microcomputers — Volume 3 — Some Real Support Devices (Adam Osborne)	\$19.00
Some Common Basic Programs (Adam Osborne)	\$13.50
Accounts Payable and Accounts Receivable (Adam Osborne)	\$20.80
Payroll with Cost Accounting in Basic (Adam Osborne)	\$20.80
General Ledger (Adam Osborne)	\$20.80
Z80 Programming for Logic Design (Adam Osborne)	\$13.50
6800 Programming for Logic Design (Adam Osborne)	\$13.50
8080 Programming for Logic Design (Adam Osborne)	\$12.55
IC OP-AMP Cookbook (Walter C. Jung)	\$17.50
TTL Cookbook (Lancaster)	\$12.95
TV Typewriter Cookbook (Lancaster)	\$13.50
CMOS Cookbook (Lancaster) 1st Edition 1977	\$14.25
Active Filter Cookbook (Lancaster)	\$19.95
IC Timer Cookbook (Jung)	\$13.50
The Cheap Video Cookbook (Lancaster)	\$7.95
Transistor Specifications Manual — 9th Edition	\$11.95

American Radio Relay League Publications:

All About A.R.R.L. Code Kit	\$12.80
Hints and Kinks for the Radio Amateur	\$7.20
The Radio Amateur's VHF Manual	\$7.20
A.R.R.L. Antenna Handbook	\$8.80
Understanding Amateur Radio	\$8.80
The Radio Amateur's License Manual	\$6.20
A Course in Radio Fundamentals	\$7.20
Specialized Communications Techniques for the Radio Amateur	\$7.20
FM & Repeater for the Radio Amateur	\$8.80
Single Sideband for the Radio Amateur	\$7.20
Ham Radio Operating Guide	\$7.20
Electronics Data Book	\$7.20
Solid State Design for the Radio Amateur	\$12.80
Learning to Work with Integrated Circuits	\$4.00
Getting to Know Oscar from the Ground Up	\$6.20
Tune in the World with Ham Radio	\$13.25

Microcomputers/Microprocessors Books:

Microcomputers/Microprocessing: Hardware, Software and Application (Hilburn & Julich)	\$30.50
Microcomputer Primer (Waite & Pardee)	\$10.75
How to Buy and Use Minicomputers and Microcomputers (W. Barden, Jr.)	\$13.50
How to Program Microcomputers (W. Barden, Jr.)	\$11.95
The 8080A Bugbook — Microcomputer Interfacing and Programming (Sams Publication)	\$14.25
Getting Acquainted with Microcomputers (Lou Frenzel)	\$11.95
Understanding Microcomputers and Small Computer Systems (Scebi Publication)	\$15.40
Microcomputers for Business Applications (W. Barden, Jr.)	\$12.70

Other Titles:

73 Dipole and Long-Wire Antennas (Edward M. Noll)	\$7.50
73 Vertical, Beam and Triangle Antennas (Edward M. Noll)	\$7.50
VHF Handbook for Radio Amateurs (Brier & Orr)	\$9.40
Amateur Radio Techniques — 6th Edition (P. Hawker)	\$9.35
RCA Receiving Tube Manual	\$5.10
COS/MOS Integrated Circuits Manual (RCA)	\$7.95
Electric Guitar Amplifier Handbook (Jack Darr)	\$14.25
Beam Antenna Handbook — New 5th Edition (William I. Orr & Stuart D. Cowan)	\$7.80
Slow Scan Television Handbook (Don C. Miller & Ralph Taggart)	\$7.90
Discrete Databook (National Semiconductor)	\$6.70
Linear Databook (National Semiconductor)	\$6.70
Build Your Own Working Robot (Heiserman)	\$8.50
Listen to Radio Energy, Light and Sound (Calvin R. Graf)	\$7.95
Amateur Antenna Tests and Measurements (Harry D. Hooton)	\$12.25
The Beginner's Handbook of Amateur Radio (Clay Laster)	\$14.20
Getting Acquainted with the IC (Rufus P. Turner)	\$7.00
Learning the Morse Code for Amateur Radio Purposes (Roger Davis)	\$0.60
The Amateur Radio Licence (Novice Study Guide) (Roger Davis)	\$2.40
The Elementary Radio Course (Roger Davis) and The Intermediate Radio Course (Len Whyte)	\$5.60
Manual of Questions and Answers for the Novice Licence — 6th Edition (Keith Howard)	\$6.00

For mail orders please add: \$1.40 Local \$1.75 Interstate

MCGILL'S AUTHORISED NEWSAGENCY PTY. LTD.

187 Elizabeth Street, Melbourne. Phone: 60-1475-6-7

Prices Subject to Alteration



HOW'S YOUR BLOOD PRESSURE?

Take your own
blood pressure
quickly and
accurately in your
own home or office

Introducing the Unitrex Home Blood Pressure Monitoring Kits!

A SPHYGMOMANOMETER can help protect you and your family against one of the most dreaded human killers in the world — heart disease and other illnesses associated with abnormal blood. It is not surprising then that hundreds of thousands of people world-wide are buying their own personal blood pressure monitoring devices — NOT as replacements for regular medical checks. But simply as an extra precaution for peace of mind.

One of the best known home units is the Home Blood Pressure Monitoring Kit from Unitrex. A substantial quantity of these were imported by Australia's Caldor Corporation and sold extensively via chemists — they were also offered via mail order.

Caldor have a number of these units still available which they are offering to our readers for the very low price of \$29.95 — plus \$2.50 post and packing. The kit includes the professional blood pressure unit itself, a nurse's stetho-

scope, a complete instruction book and three month's supply of blood pressure recording forms.

Please note: This offer is made by the Caldor Corporation, 12 Terra Cotta Drive, Blackburn, Vic., 3130. This magazine is acting as a clearing house for orders only. Cheques should be

made out to 'Caldor Offer' and sent together with order to 'Caldor Offer', Electronics Today Int., 15 Boundary Street, Rushcutters Bay, NSW, 2111. ETI will process orders and pass them on to Caldor who will then send out the units by certified mail. Please allow approximately four weeks for delivery.

Caldor Offer

Please send me:

..... Quantity — Unitrex blood pressure monitoring kit/s at \$29.95 each	\$
plus postage at \$2.50 each	\$
TOTAL	\$

Name


Address

.....Postcode

Please make cheques/postal notes payable to 'Caldor Offer' and send C/- Electronics Today International, 15 Boundary Street, Rushcutters Bay, NSW 2111.

'THE S100 BUS STOP'™


ETI 642 S100 16K STATIC RAM



16K, 2114 Low Power chips 1.2 Amps typ. for 16K, 300 or 450 nS, 4K addressing, 4K Write Protect switches, Bank Select, Wait states, plated thru holes, solder mask, see Feb. ETI project for details. **KIT \$299, P&P \$5.**
ASSEMBLED & TESTED \$366 plus \$5 P&P Reg. mail.


S100/6800 CHASSIS

Now with
15 amp
power
supply!



11 slot backplane, fully card guided, 15 Amp power supply, fan, key switch, bench mount, rack mount, anodised alum. Sent FOB IPEC Transport. **BASIC BENCH MOUNT \$196; BASIC RACK MOUNT \$175; ACCESSORIES KIT \$52; S100 POWER SUPPLY \$79. 6800 REGULATED POWER SUPPLY \$104. Assembled price add \$100.**


S100 I/O PORT BOARD



9 Parallel ports (programmable), 1 SERIAL PORT — TTY — RS232 — or TTL, BAUD rate generator 9600 to 75, Fully address decoded, Low Power buffers, Plated thru holes, solder mask. **KIT \$164, A&T \$189, P&P \$3.** Board with 2 Serial Ports available October '79

- S100 Cassette Board available soon.
- S100 16K Eprom board kit...\$90 plus \$3 P&P
- S100 Z80 CPU board kit...\$149 plus \$3 P&P
- S100 FLOPPY DISK CONT. kit \$159. P&P \$3
- S100 Extender termination board\$70
- S100 11 slot Backplane\$36
- S100 100 way connector\$8.00
- S100 WIRE WRAP board\$28.50
- S100 Extender board kit\$33.00
- NUMBER CRUNCHER KIT\$49.50
- PAPER TAPE READER KIT\$69.50
- FRONT PANEL DISPLAY KIT\$87.50
- 8080 SINGLE STEP CONTROL\$21.65
- Muffin Fans 240V\$24.00

UV EPROM ERASERS



New product range. Model LEE/T 15W tube, 120 min timer, up to 40 EPROMS will erase in 10/15 mins. Model MEE/T 8W tube 120 min timer, up to 10 EPROMS will erase in 20/30 mins. Model MEE is the same as MEE/T but with no timer. All erasers are fully assembled and have a safety switch. **LEE/T \$105, MEE/T \$93.50 MEE \$74.00**

DISK DRIVES

SHUGART SA400\$375 P&P \$5
SHUGART SA801/R\$680 P&P \$5

6800 PRODUCTS

6800 Extender Board.....\$33.00
6800 11 slot backplane.....\$36.00
6800 11 slot chassis (basic rack mount)\$175

EPROMS & RAM CHIPS

2708 450 nS GUARANTEED\$12.00
2716 450 nS single supply ex-stock\$47.50
Hitachi 2114 Low Power 450 nS "Super-Rams", 4MHz.....\$8.50

Send 60c in stamps for COMPUTER PRINTOUT CATALOGUE for more details.

ALL PRODUCTS AUSTRALIAN MADE AND EX STOCK (ALMOST). DEALER ENQUIRIES WELCOME

SM ELECTRONICS
MELBOURNE



welcome
here

Give name, no., expiry date & signature for mail order sales.

SM ELECTRONICS

10 Stafford Crt, Doncaster East, Victoria. 3109.
PO Box 19, Doncaster East, 3109. Phone: (03) 842-3950.
DEALER: The Byte Shop, 29 Colbee Crt, Phillip, ACT. 81-5011.
BUILT & TESTED POA. ALL PRICES ADD 15 PERCENT S/T IF APPLICABLE.



ELECTRONICS ENGINEER

General Motors-Holden's Ltd. has an immediate vacancy for an experienced Electronics Product Engineer in the technical centre at Fishermen's Bend.

The successful applicant will be responsible for the design and development of electronic systems and components as elements of the motor car.

Candidates should possess a Degree or Diploma in Electrical or Electronic Engineering coupled with 3-5 years' experience in design and development of electrical and electronic equipment for volume productions. Knowledge of automotive equipment and familiarity with digital and analogue computer techniques is desirable.


This position offers opportunity for advancement and development for the successful applicant in an expanding field with Australia's leading motor manufacturer.

Written applications, including phone no., should be forwarded to:

Supervisor, Salaried Employment,
GENERAL MOTORS-HOLDEN'S LTD.
G.P.O. Box 1714, MELBOURNE, 3001.


SE 164

For precision soldering
Light weight
High power

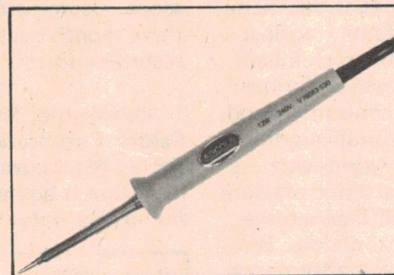

ADCOLA STANDARD

No frills.
Just high performance.
3mm S 30
5mm S 50
Fitted with non-seize tips

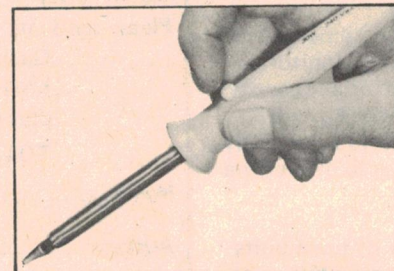

ADCOLA DUOTEMP

Temperature control at your fingertips.
3mm D 30
5mm D 50

Fully automatic 'THERMATIC' also available.

FROM YOUR RADIO PARTS SUPPLIER OR:

(02) 709 5293
(03) 543 5122
(002) 34 2233

(07) 44 0131
(08) 42 6655
(09) 381 550C

ADCOLA

Shoparound

THIS PAGE is to assist readers in the continual search for components, kits and printed circuit boards for ETI projects. If you are looking for a particular component or project — check with our advertisers if it is not mentioned here. Also, for a list of suppliers who stock the ETI projects published over the last 2½ years, our “Kits for Projects” page may always be found on the page immediately before the DREGS page (inside the back cover).

First up this month, a note about our **Induction Balance Metal Locator**, ETI 549 (May 1977 issue) — it seems everyone's gone metal detector mad these days! The Sunday papers have been giving the latest gold rush(es) a good run these last few months and metal detectors have figured in a few ‘finds’. Even if you don't plan on using our metal detector for such speculative ventures, but more mundane/pragmatic applications like finding water pipes in the back garden — the following suggestion will be of interest.

A number of readers, having successfully constructed this project, found the sensitivity control somewhat ‘coarse’ in adjustment. Thinks . . . how to improve it without restricting the overall range? (very necessary). Solution . . . replace it with a ten-turn potentiometer. Simple, but where do you get them? Many frustrated hobbyists have found them to be almost as rare as rocking horse dung (or wing feathers from a Dodo, hen's teeth — etc.).

Fear not dear readers . . . we have cast our net far and wide to the four corners of the land (well, round and about anyway). We found two stores could oblige. Namely:

Radio Despatch Service
869 George Street
Sydney, NSW 2000

and


Stewart Electronics
33 Sunhill Road
Mount Waverley, Vic 3149

They stock the shaft-drive types, required by the project, in a suitable value (5k). Price: around \$6-\$7.

Concerning the item on **Instrument cases** from Adaptive Electronics in last month's Shoparound, the Director, Steve Tusack, advises that they can now supply screen-printed front panels for the **Series 4000** stereo amp. While we're on the subject, David Tilbrook suggests it might be worthwhile putting the Moving-coil Cartridge Preamp, and its power supply, each in a suitable-sized Adaptive case with the steel top and bottom plates as this should improve rejection of


external hum fields.

Having mentioned the subject of front panels, in case you've already forgotten last month's item, Radio Despatch Service advise that they will be able to provide Scotchcal front panels and meter scales for ETI projects in red, blue or black on a silver background. All new projects, and a number of past ones, which use Scotchcal front panels will be stocked.

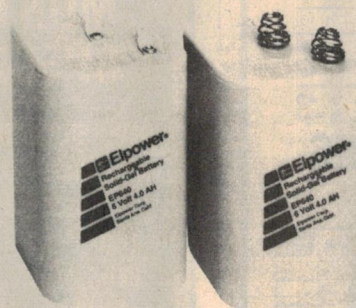

The Elpower 6V lantern battery style gel electrolyte rechargeable batteries (above) and their discharge characteristics (right). Data courtesy Ampec Engineering.

Discharge Characteristics: Discharge Time * vs. Constant Current Drain
*Time required for the closed circuit voltage (CCV) to decrease 0.4 V/cell at room temperature.

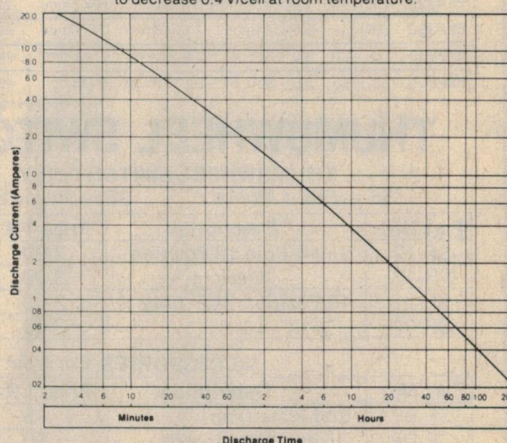

Rechargeable batteries can save you money in the long run. They're particularly attractive if they match the standard Leclanche dry batteries so widely used in a myriad of applications. Ampec Engineering of Sydney are importing a range of rechargeable solid-gel electrolyte batteries in sizes to match the popular dry batteries.

These batteries, made by Elpower, can be charged and discharged from 100 to 1000 times. They can be recharged from a fully discharged state in less than 14 hours, according to the manufacturer. They may be left on float charge without damage and have the marvellous ability to be mounted in any position — the gel electrolyte will not leak.


The most popular sizes — and obviously most useful to constructors — are the 6V lantern style, EP640-21 with spring terminals and the 12V ‘Big Jim’, with screw terminals. Both have a capacity of 4 AH (ampere-hours) about one-tenth that of a car battery, which is plenty for a whole host of battery-operated projects.

The lantern style battery (EP640-21)

costs around \$12. Over their lifetime, these batteries would represent quite some saving over standard dry-cell batteries which cost up to several dollars and may be used only once.

Any charger can be used to recharge the batteries as long as the output voltage is greater than the fully-charged open-circuit voltage of the battery. For a 6V battery the charging voltage should be about 7.5V and the float voltage about 6.75V. For a 12V type, charge and float voltages should be 15V and 13.5V respectively. Charging current should be no more than one-tenth of the battery's AH capacity. The simplest charger would consist of a transformer, diode bridge and current limiting resistor. The limiting resistor should be chosen to limit the current to the correct value for a fully-discharged battery.

A number of suppliers are expected to have stocks shortly but at present they are only available from Radio Despair . . . er, um I mean — Despatch or Martins Laundry . . . oops, that is, Martin de Launay, in Sydney.




CONTINENTAL SPECIALTIES

EXPERIMENTOR (TM) sockets and bus strip, breadboarding for every application.

- Exclusive all-in-one design — 5-point terminals plus two bus strips.
- Choice of 8mm and 15mm centres — accommodate small and large IC's, including microprocessors, PROM's, etc.

- Add-on quad bus strip for data buses, power or signal lines wherever needed.
- Sockets snap together both vertically and horizontally.
- Ultimate in flexibility, adaptability and expandability. At last designers can prototype with standard DIP's and larger packages — all without losing fan-out capabilities.

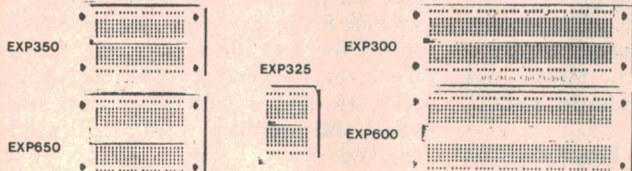

Model No.	Stock No	Length	Width	Center Channel	5 Tie Point Terminals	Bus Strips
EXP300	03-1300	6.0"(152mm)	2.1"(53mm)	.3"(8mm)	94(470)	2(80)
EXP325	03-1325	1.9"(48mm)	2.1"(53mm)	.6"(15mm)	22(110)	2(10)
EXP350	03-1350	3.6"(91mm)	2.1"(53mm)	.3"(8mm)	46(230)	2(40)
EXP600	03-1600	6.0"(152mm)	2.4"(61mm)	.6"(15mm)	94(470)	2(80)
EXP650	03-1650	3.6"(91mm)	2.4"(61mm)	.6"(15mm)	46(230)	2(40)

U.S. Patent Design Number 235,554

THUMBWHEEL SWITCHES

THUMBWHEEL SWITCH ONLY

SF — Front Mount

SR — Rear Mount

Part No.	Description	Price 1-9	Price 10+
SF-12	Single Pole 10 Position	3.00	2.70
SR-12	Decimal	3.00	2.70
SF-21	10 Position BCD only	3.00	2.70
SR-21		3.00	2.70


ACCESSORIES For front mount

Part No.	Description	Price 1-9	Price 10+
SF-EP	End Plate (Pair)	.75	.69
SF-DP	Divider Plate (each)	.50	.45
SF-BB	Blank Body (each)	.50	.45
SF-HB	Half Body (each)	.50	.45


ACCESSORIES For rear mount

Part No.	Description	Price 1-9	Price 10+
SR-EP	End Plates (pair)	.75	.69
SR-DP	Divider Plate (each)	.50	.45
SR-BB	Blank Body (each)	.50	.45
SR-HB	Half Body (each)	.50	.45

SERIES SF Front Mount Assembly



SERIES SR Rear Mount Assembly



PANEL CUT OUT LENGTH L

NO. OF SWITCHES (+ 1 PAIR END PLATES)	L INCHES	L MM
1	0.640	16.25
2	0.955	24.25
3	1.270	32.25
4	1.585	40.25
5	1.890	48.25
6	2.205	56.25
7	2.520	64.25
8	2.835	72.25
9	3.150	80.25
10	3.465	88.25

PANEL THICKNESS REQ.

0.125 ± 0.010"

3.17 ± 0.254 MM

N SWITCH DIVIDER OR 0.315 ± 0.002"

FULL BODY SPACER 8.00 ± 0.127 MM

N END PLATE OR 0.158 ± 0.002"

Z 1/2 BODY SPACER 4.01 ± 0.127 MM

STEWART ELECTRONICS

33 SUNHILL ROAD, MT. WAVERLEY. 3149.

Phone (03) 277-0622
Bankcard accepted.

Telex AA36908.
Mon-Fri 9am to 6pm.
Sat 9am to 12 noon.

Rod Electronics Irving

499 High Street,
Northcote, Melbourne. 3070.
Phone (03) 489-8131.

THIS MONTH'S SPECIALS

10 RED LEDS.....	\$1.40
100 RED LEDS..	\$13.00
10 YELLOW LEDS	\$2.90
100 YELLOW LEDS	\$27.00
10 555.....	\$2.90
10 4016.....	\$4.50
CB547.....	\$0.12
10 BC547.....	\$1.10
7805.....	\$0.90
BC548.....	\$0.15
10 BC548.....	\$1.40
BC549.....	\$1.40
MJ802.....	\$3.60
BU208.....	\$4.90
BU126.....	\$3.90
LM381.....	\$1.75
LM382.....	\$1.75
2114 (450nS).....	\$6.25
2708 EPROM.....	\$12.00
IN4007.....	\$0.15

4N29.....	\$1.10
10 SC141D.....	\$12.00
10 SC151D.....	\$22.00
10 TIP31B.....	\$7.00
10 2N3055.....	\$7.00

CAPACITORS

5600uF 40v.....	\$1.95
6800uF 50v.....	\$4.75
2500uF 50v.....	\$1.95

KITS

ETI 480 100W MODULE KIT includes Heat Sink Bracket.	\$19.75
ETI 480 50W MODULE KIT includes Heat Sink Bracket.	\$16.00
ETI 470 60W MODULE KIT includes output transistors...	\$19.75

NEW PCB's AVAILABLE

DREAM 6800.....	\$9.90
ETI 470.....	\$2.90
ETI 471.....	\$9.90
ETI 472.....	2.90
ETI 549.....	\$2.75

Also in stock: Magnovox speakers, valves, resistors, capacitors, car speakers, extremely wide range of project boards, soldering irons.

MAIL ORDERS: PO Box 135, Northcote, Vic. 3070. Minimum pack and post \$1.00.

Send 40c stamp for 16 page catalogue. We have an extremely wide range of Transistors, IC's etc.

Ideas for Experimenters


Improved sync for the 640 VDU

Having spent some time getting his 640 VDU to produce sync which his modified TV would lock on, Mark Johnson of Wahroonga in Sydney, sent us this remarkably simple modification. This change will improve the stability of the display, particularly on the first lines following the vertical retrace.

True composite television sync has horizontal sync pulses during the vertical retrace. A *simplified* TV sync pulse waveform is shown in A in the diagram here, compared to the original 640 VDU sync in B and the sync produced by this modification in C.

The simple sync pulses generated by the 640 VDU are often not adequate to drive modified TVs which many 640 owners may be using. Whilst the sync pulses produced by this modification are not ideal, life is made a little easier for the TV's horizontal oscillator during retrace (or just after!).

The changes are simple. The diode OR gate, D1 and D2, is replaced by an

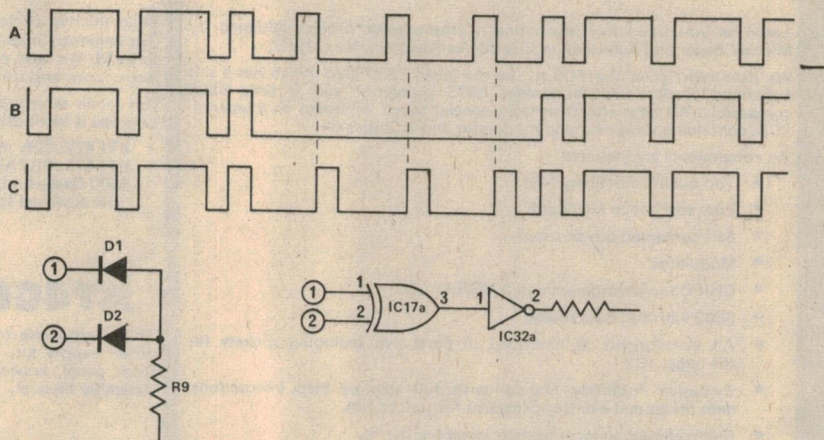


exclusive -OR gate, followed by an inverter. As both the ex-OR and the inverter are available spare in packages on the VDU board, this modification can be made without extra parts or cost!

Diodes D1 and D2 are removed and their cathode pads connected to the inputs of the ex-OR (in IC17) by flying leads. The output of the ex-OR (pin 3, IC17) is linked to the inverter (in IC32) input, the inverter output being returned to the anode pads of D1 and D2.

In normal TV sync, horizontal sync pulses are transmitted during the vertical sync period, allowing continued phase lock of the horizontal oscillator. The ex-OR approximates this characteristic allowing horizontal sync pulses during the vertical retrace. While not ideal, this modification enables quicker phase lock after the retrace, stabilizing the first few lines.

At the same time, without the diode voltage drops, the overall sync magnitude available is a little greater, generally resulting in better locking.

Two-wire relay control

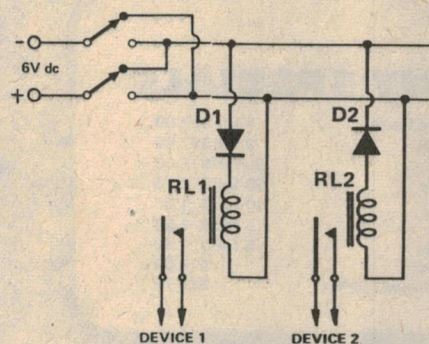

The problem of how to operate two relays independantly from just two wires always produces a lot of head scratching — and not just with beginners! This circuit, from the ETI files, shows how it's done.

The relays RL1 and RL2 are each connected to the two-wire line via a series diode. However, D1 is connected

the opposite way round to D2. A reversing switch at the end of the line, before the dc voltage required to operate the relays, is used to set which relay will be activated. With the dc voltage connected in the polarity shown, and the reversing switch set as indicated, D1 will conduct and current will flow through RL1 which then operates Device 1 connected to its contacts. D2 will be reverse biased and will not conduct. When the reversing switch is set the opposite way D2 will conduct, D1 being reverse biased now, and RL2 will operate.

If you want both relays off for some purpose, the dc voltage will have to be disconnected. The simplest way to do this is to have a three-position two-pole toggle switch, the centre position being 'off'.

Any ideas?

Have you had a bright idea lately, or discovered an interesting circuit modification? We are always looking for items for these pages so naturally, we'd like to hear from you.

We pay between \$5 and \$10 per item — depending on how much work we have to do on it before we publish it.

The sort of items we are seeking, and the ones which other readers would like to see, are novel applications of existing devices, new ways of tackling old problems, hints and tips.

DREAM 6802 —COMPLETE KIT

Learn as you build this fascinating microprocessor project designed by Michael Bauer and published in Electronics Australia, May, 1979.

We have redesigned the PCB to use the latest 6802 chip which has a self contained clock driver (eliminates 6875 problems) and is fully 6800 compatible. We have also designed a special touch keyboard on a separate PCB, containing power supply, modulator and loudspeaker.

All components are included:

- Top quality fibreglass PCB.
- Low cost touch keyboard.
- Self contained power supply.
- Modulator.
- CHIPOS in preprogrammed 2708 EPROM.
- 6802 with full data sheets.
- All components as described in parts list, including sockets for the larger IC's.
- Exclusive Assembly Manual with full step by step instructions, data sheets and exciting programs for you to run.
- Full technical support (details in each kit).

This kit is complete to the last bolt, and requires about 6-8 hours of assembly time for an experienced constructor.

DREAM 6802 **\$149.50 (including Sales Tax).**
Certified Post \$2.50 extra.

EUROCARD 2650

A top quality expandable computer system. For full details see our July, 1979, Catalogue.

	KIT	PCB. ONLY
2650 CPU Card	\$135.00	\$35.00
8K RAM	\$175.00	\$55.00
4/8K ROM CARD	\$120.00	\$35.00
Mother Board		\$20.00
Wire wrap card		\$20.00
19" Rack case	\$ 49.00	

TRS—80 USERS

16K Conversion Kit (8 x 4116 Rams)	\$115.00
BASIC III (for level II 16K) cassette with manual	\$ 45.00
Games Pack I	\$ 24.95

INTERNATIONAL 4000 60W. AMPLIFIER

Build this top performing Hi Fi amplifier as described in ETI, May, 1979. Our engineers have gone to great lengths to make sure this is a real pleasure to build. We have prepared a detailed Assembly Manual with step by step instructions and troubleshooting hints.

Our repair service is available on this kit (full details in each kit). The case supplied is identical to that used in the article but with timber sides.

ETI 470. 60W module kit (2 required)	\$29.50 each.
ETI 471. PREAMP KIT (1 required)	\$47.50. P/P \$2.00.
4000 Case—timber sides prepunched, silk screened front panel	\$45.00. (Freight \$5.00).

AT4000 COMPLETE KIT

This is complete to the last bolt. Includes 2 x 470 kits, 1 x 471 kit, 1 x power supply kit, 4000 case with timber sides, silk screened prepunched front panel, knobs, sockets etc. Also includes our detailed step by step Assembly Manual.

\$179.50. (Freight/packing \$5.00 in Australia).

DG640 VDU

Our most popular product to date. This memory mapped VDU was designed by David Griffiths and published in ETI, March, 1978.

- Features
- 16 line 64 characters.
 - Upper/lower case.
 - Full graphics.
 - Quality plated through hole PCB with gold S100 edge connectors.
 - Detailed manual with software.

DG 640	(Kit)	\$139.50
	Assembled	\$149.00
	PCB with Manual	\$ 35.00
	Certified post	\$ 2.50

COMPONENT SPECIALS

2114 4K Static Rams	4 for \$27.00
2708 EPROMS	2 for \$27.00
IN914 diodes	50 for \$ 2.00
IN4004 diodes	50 for \$ 2.75
RED LEDS	10 for \$ 1.80
555 Timers	5 for \$ 1.50
741 Op Amps	5 for \$ 1.50
SC/MP 11 Chip	\$ 9.95
2650 A-1 high speed 2MHz	\$24.75



MAIL ORDERS TO:
BOX 355, HORNSBY 2077




SHOWROOM: 1A PATTISON AVE., WAITARA 2077

HOURS: 9—5 MONDAY TO SATURDAY

PHONE: (02) 487-2711

Ideas for Experimenters

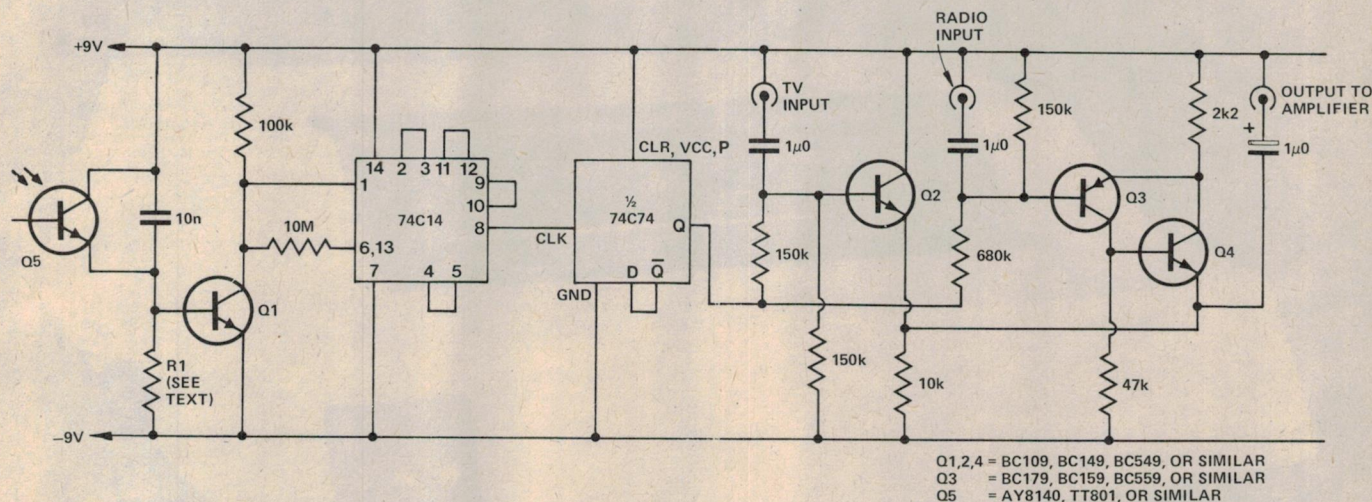

TV ad blanker

If you dislike having to watch TV adverts, then this idea, from **Graham Taylor** of Glen Iris, may be to your liking.

Basically, it's a light-controlled AB switch. When the photo-transistor receives a pulse of light — from a hand torch held by the person watching the TV — it toggles the bistable IC2 and changes the state of its Q output.

Depending on whether this output is at +9 V or -9 V, either the TV sound input or the radio sound input will be fed to the amplifier output. This can either be connected to your hi-fi amplifier or, if you feel capable of tackling it, back into the sound section of your TV set.

Operation is simple. You're watching TV, and suddenly the action is interrupted by a commercial. Quick as a flash, you pick up the torch (which you keep on the coffee table) and point it

at the Ad Blanker, which sits on top of the TV set. The circuit senses the light and cuts off the advert's sound, replacing it with some soothing intermission-like music from the radio. As soon as the ad is over, you fire another light beam at the unit and it reverts to its original state.

The use of this device has another, hidden advantage. Listening to the TV with the radio sound playing instead sometimes produces hilarious combinations.


Pulse compressor

This circuit will prove useful in any application where it is required to reduce the width of a digital pulse by a pre-set amount.

Using only two ICs, it can achieve pulse width reductions up to about 10 milliseconds. The following table gives some examples of the width reduction achieved by using different capacitor values:

Width reduction	C1
3 ms	8 u
5 ms	4 u
9 ms	1 u
9.5 ms	470 n
9.9 ms	100 n

Before the input pulse is applied, the output of IC1c is low and so IC2b's output is high. The circuit output is thus low.

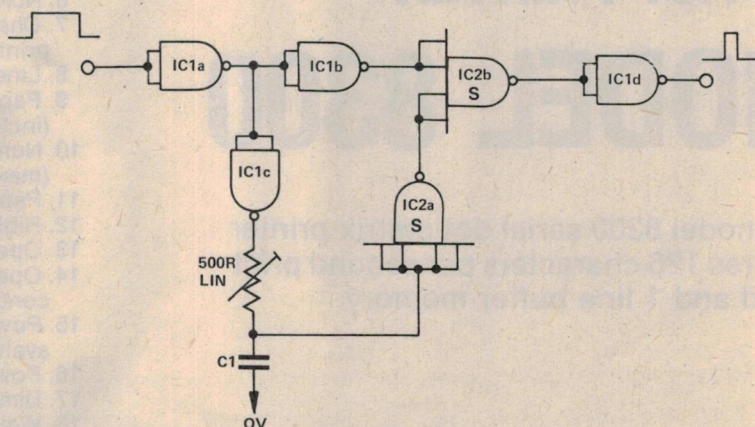

When the input pulse is applied, the output of IC1c starts to rise, but the output of the circuit remains low because of the high on the output of IC2a. When C1 charges to the threshold voltage of IC2a, the output of IC2a will

go low and the output of IC2b will go low while the input to the circuit is still high. Thus the start of the pulse is delayed by the amount of time taken for C1 to charge.



\$ 995 TAX PAID

DOT MATRIX IMPACT PRINTER MODEL 8300

The model 8300 serial dot matrix printer features 125 characters per second print speed and 1 line buffer memory.


1. Print speed: 125 CPS (50 Hz) 60 LPM (50 Hz)
2. Interface: 8 bit parallel-standard RS-232C/TTY-option
3. Data buffer: 1 line
4. Code: ASCII (96 characters)
5. Character font: 7 x 5 dot matrix (7x9 option)
6. Number of columns: 80 column
7. Character spacing: 10 CPI (Enlarged character printing is available)
8. Line spacing: 6 LPI
9. Paper width: Width: from 4.5 inch to 9.5 inch (including sprocket margin)
10. Number of Copies: Original plus 3 copies nominal (max. total thickness 0.013 inch)
11. Paper feed method: Pin feed
12. Ribbon: 13mm width, purple color
13. Operating temperature: 10°C-35°C (50°F-95°F)
14. Operating humidity: 10 percent-80 percent (Non condensed)
15. Power input: 220 or 240 VAC 10 percent/50Hz available
16. Power Consumption: Printing 100W. Non printing 7W
17. Dimension: approx. 449(W) x 375(D) x 185(H) mm
18. Weight: approx. 10Kg

AMPEC ENGINEERING CO. PTY. LTD.

1 Wellington St, Rozelle. 2039. PO Box 132, Rozelle 2039. Ph: (02) 818-1166

Available from: **NSW**; David Reid Electronics, 29-6601. Radio Despatch Service, 211-0191. Electronics (Distributors), 636-6052. Martin De Launay, 29-5834. **Vic**; Radio Parts, 329-7888. Stewart Electronics, 534-3733. Arlin Instruments, 569-6984. Ellistronics, 602-3282. **S. Aust**; Protronics, 212-3111. **W. Aust**; Reserve Electronics, 328-3116. **Qld**; Wilber Sales, 391-5136.

Ideas for Experimenters

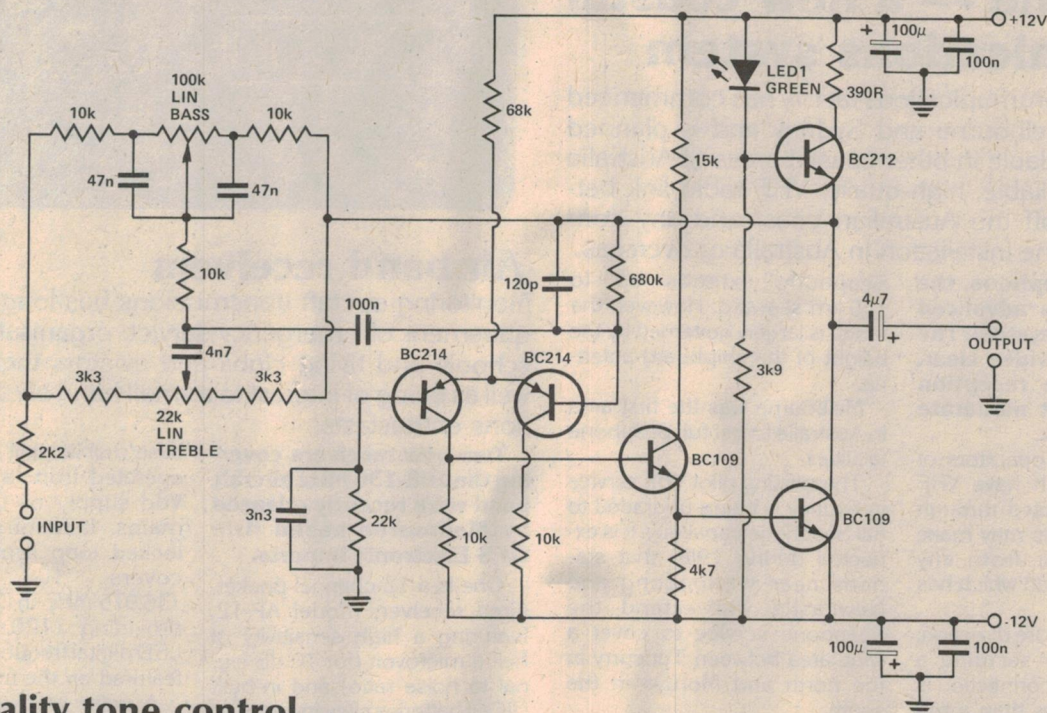

High-quality tone control

When designing a high-quality preamp, the tone control is sometimes a problem. Op amps such as the 741 are commonly used, but have a poor slew rate, give rise to distortion and exhibit rather a high noise figure.



The circuit shown here is based on an

inverting op amp — but using discrete transistors to overcome the above problems. The output stage is driven by a constant current source, biased by a green LED to provide temperature compensation.

With the controls flat, the circuit has

unity gain and the stage may be switched out as required.

The design is suitable for inputs between 100 mV and 1 V, and will provide a good overload margin at low distortion for the accurate reproduction of transients.

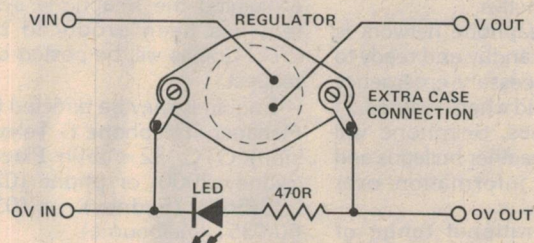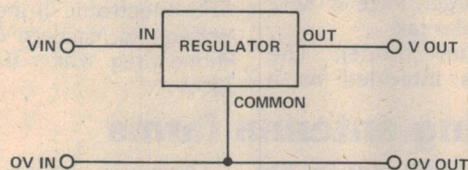

IC Regulator fail-safe

One of the problems with using power supplies based on IC voltage regulators is the chance that the common (case) connection could come adrift. This allows the voltage after the regulator to rise to the full value of the

un-regulated supply. If the supply is driving a board crammed with TTL, the result could be disastrous.

By using the regulator as shown, taking the output from a connection to the case which is separate from the

input connection, the output will always drop to zero if a lead is disconnected.

An LED can be connected as shown to provide an indication of a fault condition.

COMMUNICATIONS

Seaphone — a new coastal communications system

A new public communications facility has commenced operation in Melbourne and Sydney and is planned soon to be available in other coastal areas of Australia to provide a reliable, high-quality VHF radio link between vessels off the Australian coast and any connected telephone installation in Australia or overseas.

Known as Seaphone, the service is OTC's advanced radio telephone system. The use of VHF provides clear, interference-free reception and reliability at moderate installation costs.

Owners and/or operators of marine craft which have VHF equipment connected through Seaphone channels may make direct calls to or from any shore-based location which has a telephone.

In the ship-to-shore direction, the time lapse in securing a person-to-person connection is expected to be less than a minute.

Seaphone also has other important benefits, including marine surveillance. For the protection of marine craft and seafarers in coastal waters, a continuous and disciplined watching system is essential. Seaphone will provide a 24-hour emergency cover for marine craft and their passengers during the hours when volunteer rescue organisations are normally inactive.

OTC's Seaphone network is always on standby and ready to alert the necessary emergency services if and when required. At regular times, Seaphone will broadcast weather bulletins and navigation information over channel 67.

The operational range of

Seaphone extends up to 150 km seaward. However, the range is largely governed by the height of the shipboard antenna.

Melbourne was the first area in Australia to get full Seaphone facilities.

The existing pilot VHF service in Sydney is being upgraded to full Seaphone capability. It is expected during 1980 that stations near Wollongong and Newcastle will extend the Seaphone service to cover a wide area between Tuncurry in the north and Moruya in the south.

Further installations are planned in Perth, Dampier and Port Hedland to provide coverage of the major regions along the west coast of the continent. All locations will have a round-the-clock listening watch on emergency channels.

The Seaphone system, when fully operational, should provide a coastal VHF service comparable with any in the world.

A comprehensive booklet explaining the Seaphone system has been produced by OTC. Copies will be posted on request.

Enquiries may be directed to Manager (Telephone & Television) OTC, 32 Martin Place, Sydney 2000; or phone (02) 230-5681 (Sydney), or (03) 60-0351 (Melbourne).

relevant details.

This is undoubtedly a worthwhile contribution to the radio history of Australia as many amateurs were involved in the early days.

If any readers can assist, please contact The Secretary, Northern Branch WIA, Lucy Lockett VK7NSB, P.O. Box 275, Launceston 7250 Tas.



Air band receivers

Monitoring aircraft transmissions has long been a requirement of emergency service organisations, flying schools and flying clubs and aviators themselves as well as being of interest to a small band of communications enthusiasts.

Two new receivers covering the 108-136 MHz aircraft band were recently released by Melbourne-based firm GFS Electronic Imports.

One is a 12-channel pocket-sized receiver, model AP-12, featuring a high sensitivity of half a microvolt (for 10 dB signal to noise ratio) and in-built NiCad batteries allowing around 24 hours of continuous operation.

The squelch circuit of this receiver is claimed to be highly effective; unlike carrier-operated circuits it is not triggered by ignition noise.

The AP-12 is supplied complete with NiCad batteries, charger, three crystals and a telescopic antenna. Options include a leather carrying case, short rubber antenna and car adapter/charger. Price is \$212 including sales tax.

The other model, The R-1010, is intended as a

base/mobile unit and may be operated from a nominal 12 Vdc supply or the 240 Vac mains. It features a phase-locked loop synthesizer and covers 108 MHz to 136.975 MHz in 25 kHz steps, providing 1120 channels. A LED digital frequency readout is featured on the front panel.

A noise blanker is included and the unit claims a sensitivity of one microvolt for 20 dB signal to noise ratio.

The unit weighs just 3 kg and measures a compact 160 mm wide by 56 mm high by 250 mm deep. It is supplied complete with built-in telescopic antenna (external antenna connector provided) for a price of \$509 including sales tax.

Information on these transceivers can be obtained from GFS Electronic Imports, 15 McKeon Rd, Mitcham Vic 3132. Phone Greg Whiter (03) 873-3939.

Orbiting antenna farms

A US\$100 000 contract has been awarded to Comsat to study the "future generation" of communications satellites called Geostationary Platforms or Orbiting Antenna Farms.

These giant orbiting structures are being envisioned as permanent communications centres which may replace several individual satellites.

They offer potential advantages of increased capabilities, easier maintenance and lower cost, according to Comsat.

Large, high power communications platforms may result in less space congestion, smaller earth stations and a "... wide variety of services to many users at different frequencies".

Awarded by the NASA Space Flight Centre, the Comsat study contract will last nine months. It will include geographical coverage of existing communications satellites, future requirements in America and Europe as well as technological requirements of necessary equipment and antenna configurations.

Amateur history research

Bill Tanner VK7TE is endeavouring to collate a history of all Tasmanian radio amateurs, past and present.

He would like a photo of each, colour if possible, plus a short autobiography covering life activities, hobbies, work etc. Details especially required are: date of amateur qualification, call allotted, calls held and other



Communications computer

The latest in microprocessor technology for the communications hobbyist, is the Tono Theta-7000 communications computer.

Specially designed for the amateur radio operator, the computer offers facilities for both transmission and reception of RTTY, CW and ASCII plus video output for monitoring and a parallel port for a hard-copy printer.

Firmware provided includes the usual housekeeping, cursor and scrolling functions plus the ability to interface with another microprocessor unit.

Information can be recorded

and played back using an external tape recorder.


The unit is imported by Vicom International and is the first of its type ever offered in Australia.

"The Tono is packed with features and tricks not previously available with other units. A number of enterprising amateurs are using the units to completely control their ham shack functions," a Vicom spokesman said.

The Theta-7000 retails at \$739 and is available throughout Australia and New Zealand from the distributors, Vicom International Pty Ltd, via their dealer network.

Antenna positioner claims accuracy to half a degree

The Watkins-Johnson Company's new model WJ-7810-1 heavy duty azimuthal antenna positioner features a claimed positional accuracy of plus or minus 0.5 degrees and a backlash of one-tenth that.

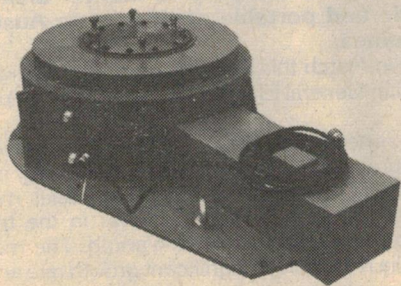

The unit has a slewing speed of one rpm and is operated by a controller complete with computer interface.

The transmission system is an all-gear drive with an in-built lubrication system. The dc motor and control electronics are positioned outside the main

body of the rotator to allow easy service access. The unit includes RF interference suppression to reduce motor and control circuitry noise.

Complete details, including price and delivery, are available from R.H. Cunningham Pty Ltd, branches in Sydney and Melbourne.

Low cost broadband HF antenna

A new broadband antenna now available will be of interest to many users of the HF spectrum.


Rated at 400 W PEP, this low cost antenna gives an omnidirectional pattern and requires no matching adjustment over its operating range of 2MHz to 14MHz.

Installation is extremely simple according to the manufacturers, Antenna Engineering Australia Pty Ltd.

For best results, they say the antenna should be supported at one end, approximately 15m above the ground, by a pole, tree or building. The other end should be supported 2.5m above ground. Length of the antenna, between supports, is only 26m.

The antenna is supplied assembled ready for use, complete with halyard, pulley and installation hardware. A support mast is not included, but a range of models is available to order.

Designated the Model 4104 antenna, it is derived from their family of travelling wave dipoles.



For more information, contact Antenna Engineering Australia Pty Ltd, Garden Street, Kilsyth Victoria 3137, phone (03) 728-1777

The company has available a short form catalogue describing their VHF and UHF base station antennas. The condensed information covers simple groundplane and vertical dipole antennas to high gain omnidirectional colinear arrays, dipole arrays, yagis, corner reflectors and mounting hardware.

Individual data sheets for all new models will be available shortly.



RF power amps


If you're looking to boost the output of your HF or UHF transceiver, these two amplifiers, recently released by I.F.T.A., are worth inspecting.

On the left is the HF version delivering 100 watts PEP and featuring a unique sand-cast heatsink. A power switch is incorporated, along with SWR protection. It is designed to run from a nominal 13.8 Vdc supply. Input-output connectors are on the rear, using SO239 coax sockets.

At right is the UHF model, also powered from 13.8 Vdc, and featuring the same sand-cast heatsink. Standard Belling-Lee input and output connectors are used.

For further information, Contact I.F.T.A. Australia, 1 Greville St, Randwick NSW 2031, (02) 665-8211.

COMMUNICATIONS

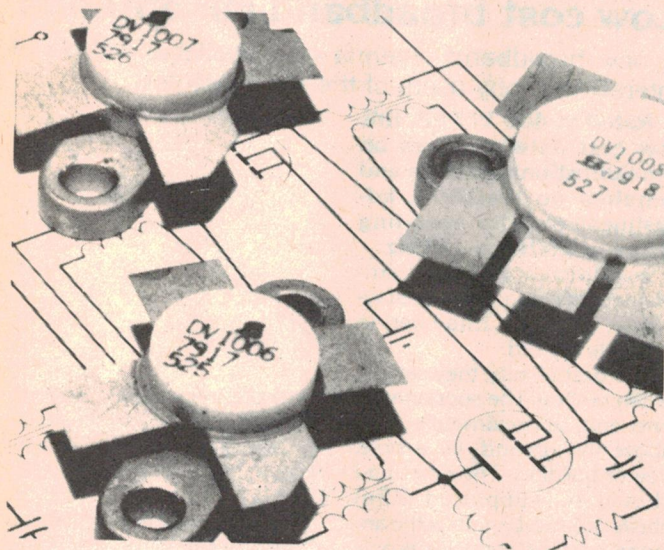

Fibre optics and microprocessors move into communications

It seems that these two, seemingly disparate, technologies will have an increasing impact in communications development, not always independently.

A microprocessor-based terminal has been developed that leans heavily on specially developed software for multiple accessing of a fibre-optic link.

Digital multiplexers, a vital part in particular communications networks, are lately having microprocessor controllers installed to operate them, according to recent reports from overseas.

New transistors for 2 GHz.

Two new small signal NPN bipolar transistors have been introduced by Hewlett-Packard.

Optimized for operation at 2 GHz, the HXTR-2102 is a general purpose transistor with minimum tuned gain (guaranteed) of 13 dB. In addition, its typical linear output power of 100 mW (20 dBm) makes this versatile transistor suitable for use in driver or output amplifier stages.

The HXTR-6106 is a low noise device with a guaranteed noise figure of 2.7 dB maximum at 2 GHz. With an associated gain of 11.5 dB typical at 2 GHz and characterization from 500 MHz to 6 GHz, this transistor can be used in a wide variety of low noise communications, radar and ECM applications.

Both transistors are offered in the HPAC-70GT package, a rugged, hermetically sealed metal/ceramic package with a grounded top. The small size of the package ensures that the loss in gain due to package parasitics is minimal and that circuit designs make efficient use of available space.

The HXTR-2102 and HXTR-6106 complete the family of new HP transistors specified at 2 GHz. These two transistors are functional replacements for the similarly packaged HP 35800 series devices.

In quantities of 1 to 9, the HXTR-2102 is priced at \$25, and the HXTR-6106 is \$33.

For further information contact Hewlett Packard Australia's component distributors: Cema Electronics Pty Ltd, 21 Chandos St, St. Leonards, NSW, phone (02) 439-4655

Siliconix predict VFETs will 'grow like gangbusters'

The advantages VMOS FET RF power devices have over bipolar transistors will see them superseding bipolars in new equipment very shortly, according to Siliconix.

In applications requiring class A or class B operation, as in SSB transmitters, VFETs can dissipate 50 W with no trouble while bipolar transistors have to suffer serious specification derating.

A bipolar device rated at 100 W is probably only good for 10 W in class A service. VFETs do not suffer the same derating. Furthermore, they have a considerably lower noise output enabling co-location operation of transmitters with 10 dB to 20 dB improvement in system performance over equipment with bipolar output transistors.

Being majority-carrier devices, they cannot suffer from thermal runaway. When operating or ambient temperature rises their silicon resistivity increases and they tend to turn

off. This characteristics also prevents current hogging when VFET units are operated in parallel.

According to Siliconix' Engineering Manager, Dick Moss, "... these features will make VMOS FETs grow like gangbusters", which we thought a charming little American colloquialism.

The latest offering in VFET devices from Siliconix operate from a 28 volt supply rail, cover the 2 MHz to 200 MHz range and deliver power outputs up to 100 W. The DV1006 is rated to deliver 25 W output, the DV1007 is rated at 50 W while the 100 W device is the DV1008. Hundred-off prices (in US\$) are about 70 cents per watt.

Instant Component Service are the Australian representatives for Siliconix

GE-STC gets aggressive in mobile radio market

An aggressive campaign is planned by the recently-formed GE-STC Mobile Radio company to market their range of two-way mobile and portable equipment in Australia and Papua New Guinea.

Formed early in March this year, the company is a joint venture between Australian General Electric and Standard Telephones and Cables Pty Ltd.

The company is headed by Mr P.J. Dellwo who has had extensive experience in Europe and North America. Marketing manager is Brian Nobbs, ex-STC's Mobile Radio Division. Sales manager for Sydney is Trevor Olrog, who is well-known in the trade, while Melbourne will be covered by Donald Warring. The mobile radio market in Australia is showing a significant growth rate according to Mr Nobbs.

Equipment will range from a simple base station and basic mobiles to sophisticated data and computer aided dispatching systems used by Police, utilities and mass transportation organisations.

The energy shortage and desire by Government and private enterprise to reduce vehicle fuel and operating costs in recent years has more than justified the use and cost effectiveness of mobile two way radio installations, GE-STC Mobile Radio say.

The company is located at Moorebank Avenue in Liverpool, with branches in Melbourne and Adelaide.

jackson

TWO-WAY RADIO COMMUNICATION ANTENNA SYSTEMS & ACCESSORIES


NOW AVAILABLE

HF-VHF-UHF

COMMERCIAL
AMATEUR
MARINE & CB


MOBILE ANTENNAE

- Fibreglass Unity Gain
- Stainless Steel Unity Gain
- Fibreglass High Gain
- 3', 5', 6', Fibreglass Helicals
- 1/4 Wave Stainless Steel 27 MHz
- 1/4 Wave Fibreglass 27 MHz
- Tuneable Top Loaded GRABBER
- Tuneable Helical 26-28 MHz
- Mini Flexible Rubber Helical
- Mini Flexible S/S Unity Gain
- Twin Truckers 27 MHz
- 9', 12', Marine 27 MHz

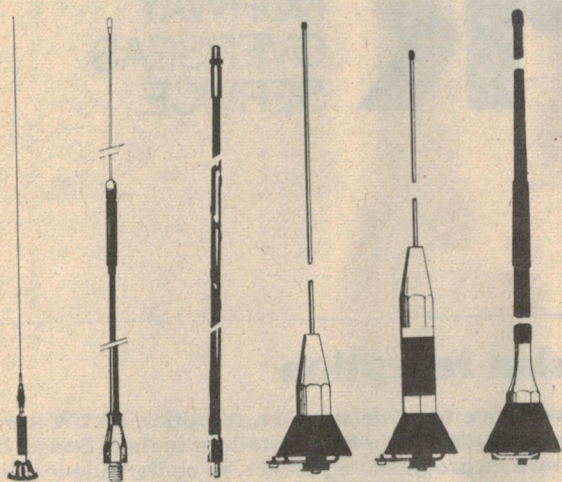


ANTENNA MOUNTINGS

- Mobile HF/VHF & UHF
- Magnetic Base (Heavy Duty)
- Roof Bar/Mirror Bracket
- Gutter Grip Bracket
- Trunk Lip Mount
- Heavy, Medium Springs
- Quick Disconnect
- Slope Adjusted Bases
- Layover Fitting

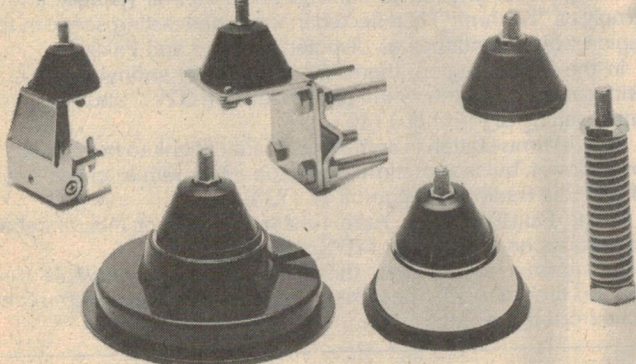

BASE STATION ANTENNAE

- Ground Planes
- Side Mounted Dipoles & Arrays
- Coaxial Dipoles
- High Gain Colinears
- Marine Coaxial Dipoles
- YAGI Beams
- Ringload
- 1/2 Wave Ground Plane 27 MHz
- 5/8 Wave Ground Plane 27 MHz
- F/G, Allum., S/S Satellite

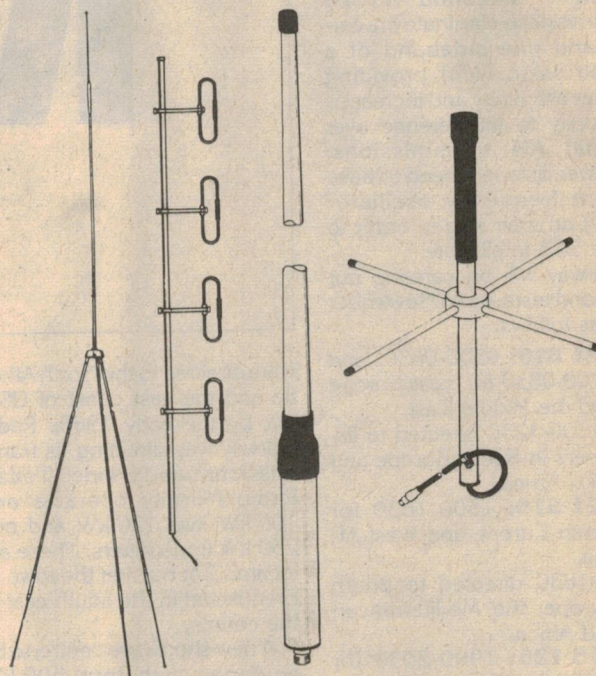

CABLES

- RF Military Spec. Coaxial Cables ● RG 58A/U, RG 58C/U, RG 8/U ● Teflon Dielectric and insulated Wires & Cables ● Speaker Wire ● Teflon insulated Hook-up Wire ● Antenna Leads, Coaxial Jumper Leads ● Power Leads.

GENERAL ACCESSORIES

- Power Supplies ● Electro-Lock, Standard Lock Mounts ● Hand Held, Base Station Microphones ● Pre Amplifiers ● HF-UHF RF Amplifiers ● Extension Speakers and P.A. Horns ● Coaxial Connectors ● Microphone Plugs & Sockets ● Fuses & Fuse Holders ● Filters & Noise Suppressors ● Transistors & I.C.'s ● Quartz Crystals.



IMPORT - EXPORT

I.F.T.A. AUSTRALIA

International Foreign Trading
Agency of Australasia

1 Greville Street,
Randwick, N.S.W. 2031
Sydney, Australia
Telephone: (02) 665-8211

Telegrams: IFTAA - SYDNEY
Telex: AA20181 IFTAUS
Mail: P.O. Box 21,
Bondi Beach, N.S.W. 2026

Norwegian Radio breaks new ground

Radio Norway is currently carrying out its first test broadcasts using single sideband.

They will continue until 3 November.

Oslo joins Swiss Radio International and Radio Sweden in venturing into this new method of reaching overseas listeners.

Single sideband (SSB) transmissions eliminate the carrier and one sideband of a transmission (AM) providing greater efficiency and increased immunity to interference over normal AM transmissions. However, listeners need to have a beat frequency oscillator (BFO) on their sets in order to make SSB intelligible.

Norway will be carrying out sideband tests, up to November 3rd, as follows:

On 21 610: 0500-0630, and 0700-0830 for East Europe and the Middle East.

and 1100-1230 directed to listeners in South Europe and West Africa.

On 21 615: 1500-1630 for South Europe and West Africa.

1700-1830 directed to South Europe, the Mediterranean and Africa.

On 15 125: 1900-2030 for North and Central America. 2100-2230 for the Americas.

The Swedish Telecommunications Administration (STA) introduced single sideband transmissions on behalf of Radio Sweden some two years ago, mainly for Swedish diplomatic missions abroad, and other Swedes overseas. The initial tests proved quite successful, and the STA has continued relays of the Home Service in Swedish ever since.

Radio Norway's essential aim is to keep in touch with fellow countrymen abroad, especially Norway's 40 000 seamen scattered world wide. For this reason the station broadcasts almost exclusively in Norwegian.

Norway's shortwave transmissions began in 1947, with a 100 kilowatt and two 10 kilowatt units. At first, transmissions

were directed to the North Atlantic and the east coast of USA, but by the early 1960s Radio Norway was directing its transmissions world-wide. Today, Radio Norway operates one 100 kW, two 120 kW and one 250 kW transmitters. These are located just outside the town of Fredrikstad in the south east of the country.

A new shortwave centre, to be equipped with four 500 kW transmitters, is currently being built on an island in south west Norway. The first of the 500 kW units should be on the air around 1981-82. By 1985, all four high power transmitters should be in operation, with a fifth in reserve.

With the present up-swing in the sunspot cycle providing better reception on the higher frequencies, Radio Norway is currently using a frequency in the uppermost broadcast band, the 11 metre band. Oslo is using 25 730 for broadcasts to Australia and the Asian region, between 1100 and 1230 daily. The 11 metre outlet is used in conjunction with 21 730 in the 13 metre band. Remember that although most of Radio Norway's programmes are in Norwegian, they do have a half-hour English program on Sundays during all transmissions.

UTENLANDSPROGRAMMET
NRK
RADIO
NORWAY
OVERSEAS
SERVICE

Asian reception

As we move towards summer, reception on the lower frequency bands should favour stations in Asia. Sunset in Asia will now be progressively earlier, so earlier fade-ins of Asian stations should occur in our local evenings.

The domestic service from Ho Chi Minh City makes interesting listening on 9623, and is heard from around 1100 with good signals.

The Ho Chi Minh City station broadcasts mostly local programmes, however, there are occasional news bulletins on relay from Hanoi. Though programmes are in Vietnamese, the local musical programmes are a highlight.

The political division of Jammu and Kashmir (usually known simply as "Kashmir") is reflected in the broadcasting scene in this region which continues as disputed by India and Pakistan.

In the Indian region, there are stations on shortwave at both Srinagar and Jammu. Srinagar is heard on 3277, and is audible until evening sign-off at 1740.

The Jammu station is somewhat more difficult to hear, being of lower power, but is sometimes heard on 3345, with extensive relays of All India Radio until sign-off at 1734.

In the Pakistani zone, Azad Kashmir Radio, at Muzaffarabad, broadcasts on 6020 from 1200 until 1800.

As summer approaches, this station should be audible from sign-on time of 1200, beginning most transmissions with recitations from the Koran.

Compiled by Peter Bunn, on behalf of the Australian Radio DX Club (ARDXC). Further information on DXing or the activities of ARDXC may be obtained from either PO Box 67, Highett, VIC 3190, or from PO Box 79 Narrabeen, NSW 2101, for a 30c stamp.

NOTE! All times are given in Greenwich Mean Time (GMT). To convert GMT to Australian Eastern Standard Time, add 10 hours. To convert to Central Time, add 9 hours, and for Western Time, add 8 hours. All frequencies are in kHz.

1980 World Radio and Television Handbook

The Australian Radio DX Club is once again co-ordinating advance orders in Australia for this annual publication, essential for all shortwave enthusiasts.

The Handbook, known as the WRTVH, is published around mid-January in Denmark.

The Handbook includes details of all the World's broadcasters on both shortwave and mediumwave, including station schedules, personnel, postal addresses and verification policies.

Write to the ARDXC address to receive an order form.

The WRTVH 1980 will be sent airmail direct to your door around late January next year, months in advance of the book being available via normal Australian retail outlets.

Costa Rica in English

Radio Reloj de Costa Rica, at San Jose, has recently re-timed its weekly English programme, entitled "Aqui Costa Rica" (This is Costa Rica).

This programme for tourists is now broadcast each Sunday 0700-0730 on the usual Radio Reloj channels of 6006 and 4832.

Special QSLs are available for reception reports of the Aqui Costa Rica segment, and reports may be sent to: Aqui Costa Rica, Apartado 2936, San Jose, Costa Rica.

Surinam returns

This recently-independent country, at the top of South America, has returned to shortwave after being silent for some months.

Radio SRS at Paramaribo uses 4850 and is audible in east Australia from sign-on at 0830.

The station is pleased to receive reception reports from listeners and has in recent months begun verifying correct reports with an attractive QSL card which includes details of the station, and Surinam in general.

New Arab voice planned

Dubai, in the United Arab Emirates, has plans underway for an international service on shortwave.

At present, a major shortwave centre is being built with three transmitters of 300 kW each to be installed in the near future.

Dubai has registered a number of frequencies with the International Telecommunications Union (ITU) in Geneva for the transmission period up to November this year. These frequency registrations are tentative assignments, and may be regarded as "bookings" in advance of any actual shortwave transmissions.

The World Radio and Television Handbook, a reliable source for information about shortwave, says Dubai plans to have the international shortwave service in operation during 1980. Dubai is currently recruiting technical staff to operate the new shortwave centre.

The Tentative High Frequency Broadcasting Schedule (THFBS) issued by the ITU in Geneva, shows that Dubai has registered 21 480 with 300 kW between 0600 and 1630 for broadcasts to Europe. This should be put in the "ones to watch" file for the months to come.

Kampuchea: English service

The Voice of the People of Kampuchea, broadcasting from Phnom Penh, now has a daily International programme in English, French and Thai, on 9695.

The English programme is on air 1200-1215, French 1215-1230, and Thai 1230-1245, and provide good reception currently into east Australia. The English programme consists of a news bulletin and a political commentary, in-

terspersed with Kampuchean music.

The station announces additional outlets for these broadcasts of 11 940 and 6090, but these channels are inaudible in Australia at the time of going to press.

Guinea

This country is not often heard here in Australia, yet as we approach summer, watch for their high frequency outlet, on 19 metres, of 15 310.

This frequency has an English programme on Mondays, Wednesdays and Fridays between 1800-1900, while on Sundays the programme is broadcast 1815 until 1900.

Tibet on air!

With the recent opening up of this remote region of China to foreign tourists, Tibet has become of interest to shortwave enthusiasts.

The Tibet People's Broadcasting Station in Lhasa has several outlets on shortwave, which carry both local programmes and relays of the Peking Domestic Service programme.

Best reception here in Australia is on 5935 and 4750, both well heard nightly between 1300 and 1545.

Peking has recently changed its attitude to listeners' reception reports of Chinese regional stations.

Previously, these reports would never be verified. However, Radio Peking will now QSL reports of its programmes beamed over regional transmitters. The World Radio and TV Handbook includes details of the locations and frequencies of most Chinese regional stations.



DON'T MISS OUT!

6 metres is coming alive...



NOW IS THE TIME to chase the 6 metre DX – as the sunspot cycle nears its peak. And what better way to get into the action than with Yaesu from Dick

INTRODUCING: The Yaesu FT-625R All Mode 6 Metre Transceiver.

Designed for today's demanding 6 metre operator. 25 watts output (SSB/CW/FM) with inbuilt AC & DC power supplies. Automatic mic gain control, built in noise blanker, variable power output, RF speech processor – a truly magnificent transceiver. And because it's a Yaesu, it is quality through and through. Quality fully backed by Dick Smith's fully equipped service centre. Call in today and have a test drive of this magnificent unit!



Cat D-2886

\$795⁰⁰

\$6.00 Road Freight
Anywhere in Australia

- SSB, CW, AM & FM OPERATION
- 50 TO 54MHz coverage (listen in to W/K, JA & ZL frequencies)
- 0.5uV sensitivity SSB; 0.35uV FM & 1uV AM
- AC & DC supplies inbuilt
- 3-way metering: S meter; relative power o/p & disc. centre meter.

We welcome



or offer easy terms with



HOW ABOUT SOMETHING FOR THE HF BANDS?

Here it is: Yaesu's new up-graded and up-rated FT-7B. Built for today's demanding amateur operator.



Cat D-2868

\$625⁰⁰

\$6.00 Road Freight
anywhere in Australia

Yes, the famous Yaesu FT-7 has had a facelift. Now with:

- AM operation too (previously only SSB & CW)
- 100 watts output (SSB & CW)
- Provision for full 10 metre band in 4 switched segments

Whether you want an HF transceiver for base or mobile use, you can't go past the brilliant Yaesu FT-7B. Many thousands of its predecessor, the FT7, are in continuous use throughout Australia (and the world)! Now you can have the very latest in solid state transceivers working for YOU. Small size and light weight make it a favourite for active amateurs. Call in to any Dick Smith store and check out this superb transceiver soon. You won't be disappointed!

YAESU MOBILE ANTENNAS

The greatest mobile system you'll find: Buy the gutter mount base and 2 metre stub and you're on the air immediately on 2 metres. Then as you need them, buy the whips for the HF bands you want to operate on. It's that simple. Now there's no excuse not to go mobile. It's easy with Dick Smith and Yaesu!



RSE-2-M
Gutter Mount
Cat D-4100
\$32.50

RSE-2A
2 metre stub
Cat D-4102
\$10.95

RSL-145
6 & 2 metre antenna
Cat D-4104
\$23.95

RSL-3.5
80 metre antenna
Cat D-4110
\$19.95

RSL-7
40 metre antenna
Cat D-4112
\$19.95

RSL-14
20 metre antenna
Cat D-4114
\$20.95

RSL-21
15 metre antenna
Cat D-4116
\$20.95

RSL-28
10 metre antenna
Cat D-4118
\$20.95

DICK SMITH ELECTRONICS

NSW 125 York Street,
147 Hume Highway,
162 Pacific Highway,
30 Grose Street,
263 Keira Street,

SYDNEY. Phone 290 3377
CHULLORA. Phone 642 8922
GORE HILL. Phone 439 5311
PARRAMATTA. Phone 683 1133
WOLLONGONG. Phone 28 3800

ACT 96-98 Gladstone Street,
VIC 399 Lonsdale Street,
656 Bridge Road,
QLD 166 Logan Road,
SA 203 Wright Street,
WA 414 William Street,

FYSHWICK. Phone 80 4944
MELBOURNE. Phone 67 9834
RICHMOND. Phone 428 1614
BURANDA. Phone 391 6233
ADELAIDE. Phone 212 1962
PERTH. Phone 328 6944

EXCEPT WHERE NOTED, ALL ITEMS SHOWN IN STOCK AT PRICES GIVEN AT TIME OF GOING TO PRESS.

MAIL ORDER CENTRE: PO Box 747, CROWS NEST NSW 2065. Ph 439 5311. PACK & POST EXTRA.



SHOPS OPEN 9AM to 5.30PM
(Saturday: 9am till 12 noon)
BRISBANE: Half hour earlier.
ANY TERMS OFFERED ARE TO
APPROVED APPLICANTS ONLY
RE-SELLERS OF DICK SMITH
PRODUCTS IN MOST AREAS OF AUSTRALIA.



eti data sheet



HIGH POWER VFETs will gradually supercede bipolar transistor technology in RF power amplifier applications in the next few years. Cost, on a dollar-per-watt basis, is rapidly decreasing on VFET devices, and when the overall cost of a complete amplifier — or amplifier chain — is considered, the circuit simplicity using VFETs brings cost benefits of its own.

VFETs have a negative temperature coefficient and are not subject to thermal runaway. Severe load mismatch presents few problems to these devices in RF power amplifiers.

This range of VFET devices is from the Communications Transistor Corporation (CTC), represented in Australia by Ampec Engineering, 1 Wellington St., Rozelle NSW 2039 (02) 818-1166. The three devices presented here are N-channel types, suitable for HF and VHF amplifier applications (linear — class B, or saturated — class C), running from a 28 to 35 volt supply rail.

CAUTION

Users are cautioned that these devices use Beryllium Oxide ceramics in their construction. Any mechanical or chemical treatment of these ceramics which produces dust or fumes, even minute amounts, can be dangerous. Care should be taken to ensure that those who handle, use or dispose of these devices are aware of this. The package should never be crushed, filed, chipped, sawed, sanded, ground or come in contact with acid. In the event of failure, return to the manufacturer.

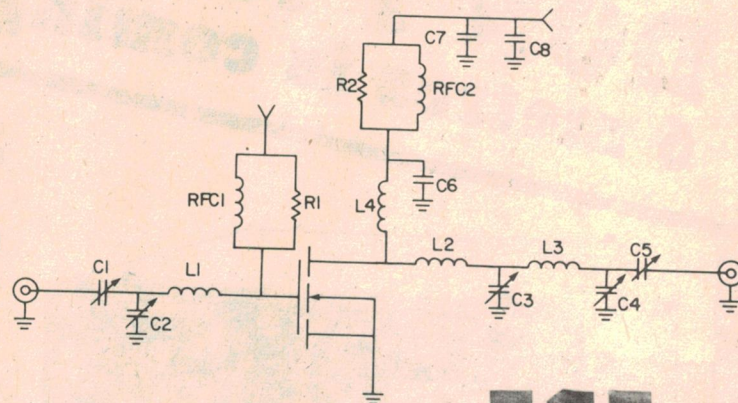

Package, BF100-35

TEST CIRCUIT 175 MHz 100 Wout BF100-35

C1, C2, C4
C3, C5

C6

C7

C8

L1

L2

L3


L4

RFC1

RFC2


5-70 p compressed mica
25-240 p compressed mica
470 p ceramic chip
100 n ceramic
10 μ electrolytic
half turn No. 18 wire, 10 mm ID
1 mm thick copper strap 5 mm wide, 16 mm long, 10 mm ID loop
1 $\frac{1}{2}$ turns No. 18 wire, 10 mm ID
6 turns No. 18 wire, 10 mm ID
6 turns No. 18 wire on Indian General F627-8 Q1 toroid.
18 turns No. 18 wire on Micro-metals T106-2, toroid with 15 R, 2 W resistor in parallel.

TYPICAL SERIES INPUT IMPEDANCE (Z_{IN})

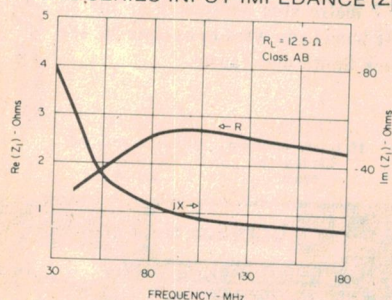


BF25-35

TYPICAL SERIES INPUT IMPEDANCE (Z_{IN})

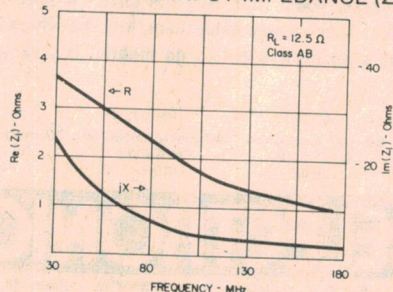


BF50-35

TYPICAL SERIES INPUT IMPEDANCE (Z_{IN})

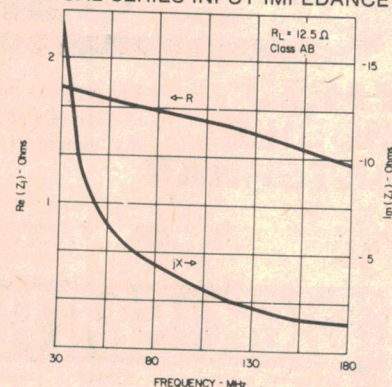


BF100-35

BFXX-35 power FETs



MM

Package, BF25-35 and BF50-35

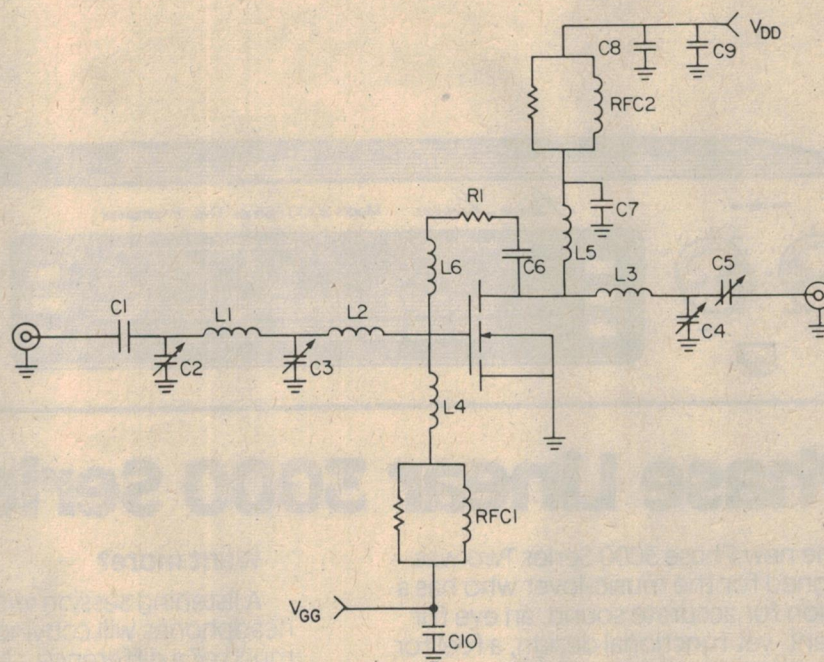


TEST CIRCUIT 80 MHz 50Wout/BF50-35, 25 Wout/BF25-35

C1 1 n ceramic chip
C2 5-70 p compressed mica
C3-C5 10-180 p compressed mica
C6 100 n ceramic
C7 470 p ceramic chip
C8, C10 10 n ceramic
C9 10u electrolytic
L1 3 turns No. 18 wire, 10 mm ID
L2, L3 2½ turns No. 18 wire, 10 mm ID
L4 330 nH (0.33 uH)

L5 6 turns No. 18 wire, 10 mm ID
L6 150 nH (0.15uH)
RFC1 16 turns No. 22 wire on Indiana General T106-2 toroid with 15 R, ½ W resistor in parallel
RFC2 18 turns No. 18 wire on Indiana General T106-2 toroid with 15 R, 2 W resistor in parallel
R1 150 R, ½ W

	Symbol	BF25-35	BF50-35	BF100-35	units
Maximum power dissipation with 25°C case temperature		75	125	250	W
Maximum drain to source voltage	BV_{DSS}		65		V
Maximum gate to source voltage	BV_{GS}		25		V
Maximum drain current	I_D	5	10	16	A
Power output with f=175 MHz, $V_{DS}=35$ V	P_{out}	25	50	100	W
Power input under above conditions	P_{IN}	2.5	6	16	W
Drain efficiency under above conditions	η		50		%
ON-state drain current	$I_{D(ON)}$	3.5	5	10	A
Small signal forward transconductance	g_M	0.7	1.5	2.2	MHO
Drain-source capacitance with f=1 MHz, $V_{DS}=28$ V and $V_{GS}=0$ V	C_{DS}	37	77	170	pF

A new preamp for the perfectionist who can appreciate the difference.

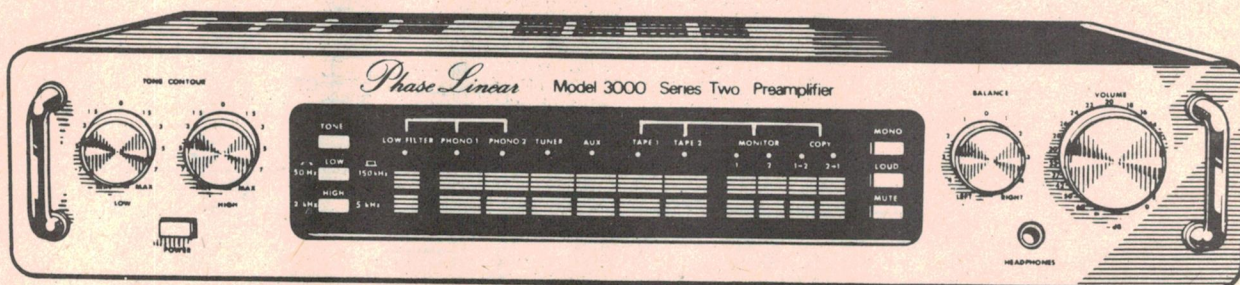

Phase Linear 3000 Series Two.

The new Phase 3000 Series Two was designed for the music-lover who has a passion for accurate sound, an eye for elegant, yet functional design, a feel for craftsmanship, and an unfailing determination to maximise return on investment.

The Phase 3000 incorporates the latest technological advancements in preamp design. Transient overloading that plagues preamps has been virtually eliminated, whether amplitude, frequency, or slew induced. Now you can enjoy the flexibility, performance and features that are priced substantially higher in other equipment.

CMOS Logic Memory System.

Most preamps use dated mechanical switching devices that force signals to travel long, noisy, circuitous routes from the inputs to the front panel, then back to the outputs. Ours doesn't. The Phase 3000 uses CMOS-digital logic to energise switching relays located where they belong, at the input jacks. This shortens critical signal paths. Noise, hum, and the "crosstalk" that's characteristic of mechanical switching is virtually eliminated.

Want more?

A listening session with a pair of headphones will convince you just how much of a difference a true headphone amp makes. Turn the 3000 around, and see how easy it is to patch in your noise reduction unit. Two complete taping circuits allow you to copy between decks while listening to another source.

If you're serious about state-of-the-art performance it's time for you to do some listening.

Hear the difference at your audio specialist's, or write for complete information.

Distributed in Australia by Acoustic Monitor Co Pty Ltd (Member of the Thomas & Coffey group), 12-18 Gould Street, Enfield, NSW 2136. Phone: (02) 642-7888. Telex: 26778. Cables: "Tomcoffy" Sydney.


Phase Linear®
THE POWERFUL DIFFERENCE

Phono Cartridge Flexibility

The two independent RIAA phono stages eliminate all low-level switching. As a result, noise is reduced to theoretical limits.

Phono 1 is designed for moving-magnet cartridges and has three selectable capacitance values.

Phono 2 is used with moving-coil cartridges and has three selectable resistance values. The expensive outboard head amp usually required for a moving-coil cartridge is already built into the 3000.

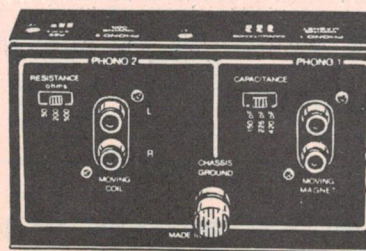

Teac's heavy metal

Teac released a range of metal tape-compatible cassette decks in July, along with a range of other hi-fi components, all demonstrated at the CE Show.

First in the new metal tape-compatible decks is their A-430. Featuring selectable bias or auto-bias, where the deck determines the bias required before recording, the A-430 is a three-head machine with Dolby noise reduction, and memory rewind stop function.

Teac quote very good specifications for the unit: 30 Hz to 17 kHz frequency response for metal tape, 30 Hz to 16 kHz for CrO2 and 30 Hz to 13 kHz for standard ferric tape. Wow and flutter claimed is only 0.03% (NAB weighted). Drive is from a single servo-controlled dc motor. Recommended selling price is only \$366.

Next comes the C-3 featuring 'LSI logic soft-touch operation'. Transport control is via a set of soft-touch switches. This unit is also a three-head machine. Record bias and level adjustment for any tape is possible using an

optional test-tone oscillator (T0-8) in conjunction with the input selector while monitoring levels on the front panel meters.

Optional extras for the C-3 include a dbx unit (RX-8), a mixer (MX-8) and a remote control unit.

Last in Teac's heavy metal line-up is the C-2. This is also a three-head machine but incorporates a two-motor dual capstan closed loop transport mechanism. Plug-in bias/eq cards allow any type of tape to be used with this machine. It features the same soft-touch operation as the C-3 and may be used with the optional RX-8 dbx unit.

Both the C-2 and C-3 incorporate memory stop and memory play facilities. Recommended prices? for the C-2, \$734 and the C-3, \$524.

Teac equipment is available from Harman Australia Pty Ltd, 271 Harbord Rd, Brookvale 2100 NSW, (02) 939-2922.





Three-way from Audio Reflex

Joining in the boom demand for speakers, Audio Reflex has released a flurry of designs in recent months, the SB485 model being the latest.

The SB485 is a three-way system incorporating a 375 mm long-throw bass driver, a 125 mm mid-range and 50 mm wide-dispersion cone tweeter. The enclosure is a high efficiency vented design of front-to-back bracing construction. It stands 700 mm high and measures 450 mm wide by 375 mm deep. It is finished in walnut grain and features a tapered cloth grille. Each unit weighs 24 kg.

The crossover network has a claimed 12 dB/octave roll-off and the speaker's handling capacity is rated at 100 watts RMS. Audio Reflex quote a frequency response of 30 Hz to 22 kHz.

Interested?, contact Audio Reflex (Australia) Pty Ltd, 7 Orchard Rd, Brookvale 2100 NSW, (02) 938-4188.

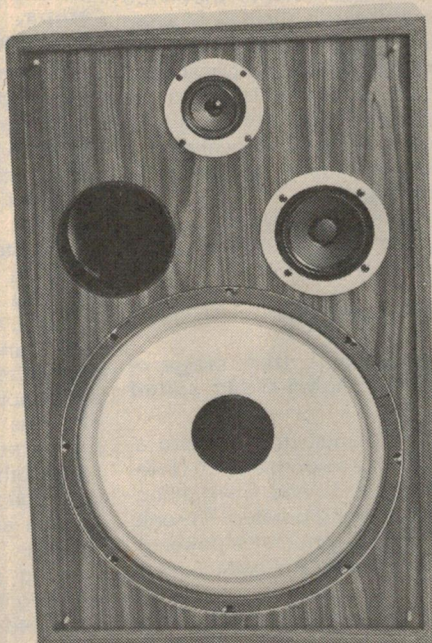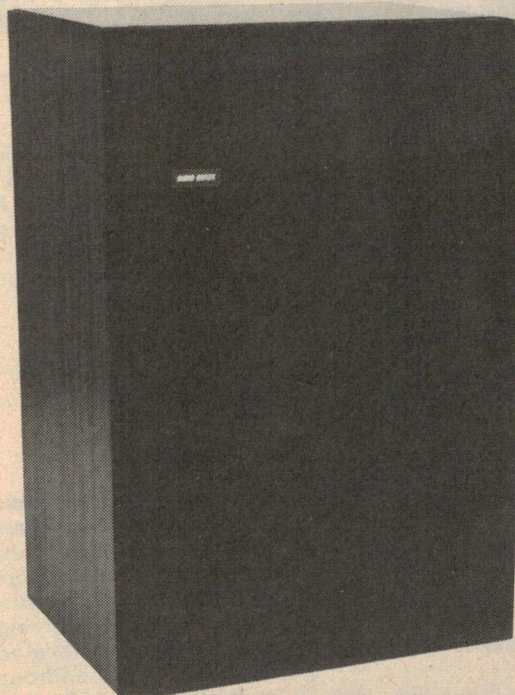



New speaker from British designer

British speaker designer, Jim Rogers launched a 'twin-bass' speaker system recently, housed in an unusual 'tensioned aluminium' cylindrical enclosure.

Called the JR150, it uses two long-throw 130 mm diameter Bextrene cone bass drivers which are said to be electrically and acoustically in parallel. Rogers claims his design increases radiation, reduces distortion and provides superior transient response.

Claimed performance figures are certainly impressive — frequency response 40 Hz to 40 kHz; power handling to 100 watts on programme. The JR150 is recommended for use with amplifiers delivering from 15 to 100 watts.

The Australian agents,

International Dynamics, are confident the system will emulate the success of the smaller JR149s which readers may know, on which the new speaker is based.

As with the JR149, the JR150 is available in a variety of wood and leather finished tops and has an acoustically transparent foam cover which can be removed for cleaning. An optional stand is available if floor-standing operation is envisaged.

International Dynamics are at 23 Elma Rd, Cheltenham 3192 Vic., (03) 95-0366.

Leader sound level meter

Leader recently announced an addition to their range of well-known audio instruments — the Model OS11 sound level meter.

Conforming to JIS and IEC standards, the OS11 features a built-in calibrator and a measuring range from 25 dB to 130 dB.

The small size and low weight of the unit make it ideal for sound pressure measurement where portability is essential, especially in industrial applications.

The manufacturers' claim a frequency response of 25 Hz to 10 kHz. A, B, and C weighting filters are incorporated. The unit weighs 900 gm and is powered by a standard 9 V battery.

Australian agent for Leader is Vicom International, 68 Eastern Rd South Melbourne, Vic 3205, (03) 699-6700.

"Care for tapes..."

Some enthusiasts have been known to lavish more care on their tapes and tape equipment than on their own children. Maxell's new tape care kit should speed their chores and allow them to attend to their domestic duties.

The office wag, punster and funny business man started whistling the well-known International Kid's Year melody and then burst into lyrics which spawned the above headline!

The Maxell tape care kit contains all the necessary cleaning aids and tools that make the job a 'snack' where, previously, improvised utensils and medical alcohol (on occasion, vodka...) were employed, albeit somewhat inexpertly.

Packaged in a small plastic case with clear plastic lid, the kit comes complete with instructions and a small booklet on the rudiments of tape recording. It is available wherever Maxell tapes are sold for a recommended retail price of \$13.85.

According to Maxell, the wise

thing to do is to clean the heads of a deck every eight to ten hours of use when recording, and every 15 to 20 hours when playing pre-recorded tapes. For critical recordings, the deck should be cleaned immediately beforehand.

The importance of tape head care can never be over-emphasised. Inappropriate cleaning methods or agents can damage heads and rollers and may subsequently result in tape damage. Neglect will have debilitating effects also. The tape care kit is clearly designed to sit close to the tape deck, a constant reminder of the necessity to use it.

For more information, contact Hagemeyer (Australasia) BV, 25-27 Paul St, North Ryde 2113 NSW.

Australian-designed amplifier range

Shown at this years CE Show in July were a range of audio amps, preamps, equalizers and mixers from the Brisbane-based firm of Audio Design.

All Australian designed and manufactured, the equipment of interest to hi-fi buffs includes a class A power amp, a two-way stereo active filter (for crossover applications) and a stereo preamp.

The stereo power amps are available in power levels of 50 W, 100 W and 200 W per channel. All feature low TID and SID and have claimed specifications of: 100 dB(A) signal/noise ratio; 20 Hz to 20 kHz plus 0 dB, minus 0.2 dB bandwidth (50 kHz power bandwidth) and total harmonic distortion below 0.1%.

Each amplifier incorporates voltage sensitive current limiting protection circuits allowing the output stage to drive loads down to four ohms at up to plus/minus 45 degree phase angle.


Fast acting LED displays on

the front panel of each unit indicate the onset of clipping, irrespective of load condition.

For more information, contact Audio Design at 3/7 Harvton St, Stafford 4053 QLD, (07) 356-9191. Distributors are: Pro-Sound in Sydney, Insound in Adelaide and Audio distributors in Perth.

Brief passages

Audiocom, well-known for their Advent speakers amongst other goodies, opened their fourth store on 5 September at Birkenhead Point shopping complex. They're located at Shop 4 and the Phone No. is (02) 81-3132.

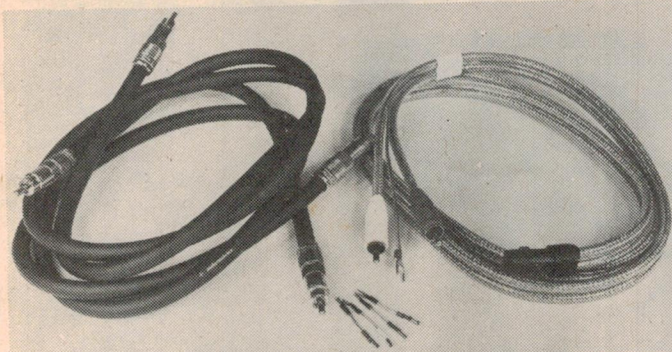

"Super conductivity" cables

Providing high noise immunity and reliable connections between the tone arm output and preamp input is a necessity with low output cartridges, particularly moving-coil types.

These "Vital Link" cables by Audio-Technica were designed to provide superior performance over conventional cables by using extremely low resistance plated wires and tight-wound shield braid together with tarnish-free connectors.

The cable set on the left of the picture is the Vital Link AT620, a one metre long stereo coax cable set featuring low capacitance foam dielectric for minimum high frequency losses and an unusual conductive polypropylene sheath over the shield braid claimed to improve hum, noise and RF rejection. The coax inner conductor is made of multi-strand 'Litz' wire for best flexibility, good conductivity and minimum high frequency loss. The connectors are 'ultra-gold' plated RCA phono types which feature a strain-relief knurled finger grip and low contact resistance.

The cable on the right is the Vital Link AT662 cable set. This stereo coax cable assembly

comes complete with a universal tone arm connector, colour-coded phono plugs and an independent grounding wire with gold-plated lugs. This assembly is recommended for use with moving coil cartridges.

The four small links in the lower centre of the picture are another set of Vital Link components. These are for cartridge connections and consist of lengths of insulated multi-strand Litz wire with gold-plated socket pins on each end for positive low resistance, corrosion free connections.

We compared the stereo coax cable sets against standard audio coax cable connecting a Nakamichi MC1000 moving-coil cartridge to the ETI 'Series 4000' preamp (See page 40) and found the Vital Link cables gave a considerable improvement.

For more information on the Vital Link set of cables, contact Maurice Chapman Pty Ltd, 44 Dickson St, Artarmon 2065 NSW.

The Acoustic Monitor Company has been appointed exclusive Australian distributors of Mobile Fidelity's "Original Master Recordings". For more information, and perhaps a copy of an interesting reprint from the US 'Audio' magazine, contact them at P.O. Box 204 Enfield NSW 2136, (02) 642-7888.

Akai Australia were visited in August by Mr A. Horie, Director and General Manager of the Foreign Trade Department of Akai Electric, Tokyo. He inspected the various subsidiary's of Akai's operations in Australia. Combined Australian sales for Akai are 220% above 1978 levels and current forecasts predict a turnover exceeding \$15 million, a marginal increase.

Concise Component series

Featuring an unusual "pulsed power supply unit", and diecast cabinets this series of audio components from Technics, were shown off for the first time at the July CE Show.

The 'concise' term refers to the size of the units, all measure only 300 mm wide and none is more than 50 mm high.

The pulsed power supply is an unusual innovation in audio equipment. The ac line input is first rectified directly to dc then converted into a 20 kHz square wave pulse train which drives the primary of a high frequency transformer. This technique permits a very compact transformer, resulting in reduced weight. A diecast cabinet is used for the power supply, along with special shielding to reduce high frequency interference leakage.

The SE-C01 dc-coupled power amp delivers 50 watts RMS per channel and Technics claim a THD of 0.03% and a power bandwidth of 20 Hz to 20 kHz. Power metering on the front panel is provided by a high-speed LED array incorporating nine yellow LEDs up to the 50 W level and three red LEDs beyond that. The scale goes from 0 to 160 W per channel and may be switched to indicate 0 to 16 W per channel for low power monitoring. Full protection is provided for the output devices and the unit is housed in a diecast cabinet.

The SU-C01 stereo preamp features moving-magnet and a moving-coil input, a subsonic filter, tone controls with centre-defeat (flat) and gold-plated connector jacks. Technics quote a signal-to-noise ratio of 88 dB (to 2.5 mV sens.) for the M.M input and 78 dB (to 250 uV) for the M.C. input.

The FM/AM tuner, the ST-C01, incorporates an 'active servo lock' circuit to maintain correct tuning. An unusual LED indicator set shows when the receiver is tuned to a station correctly. Two arrow-shaped yellow LEDs and one thin red LED are mounted on the dial pointer. All

three are lit when the receiver is not set to a station. When a station is approached, one arrow LED goes off and the other will indicate which way the tuning knob is to be turned. If you pass the station that LED goes out and the other LED will light, indicating that you should tune back a little. When the station is correctly tuned, both arrows go out, leaving only the red LED lit. If the servo tuning switch is on, the 'lock' LED will light.


Technics have incorporated three ceramic IF filters to ensure a flat group delay for low distortion. A five-stage differential amplifier provides good limiting characteristics, according to Technics and this is followed by a quadrature detector and PLL MPX stereo decoder. Technics claim a S/N of 46 dB (IHF) for stereo quieting sensitivity of 20 uV, a THD of 0.15% on stereo and frequency response of 20 Hz to 15 kHz (plus 0.5 dB, minus 0.2 dB).

The Concise Components are sold as a system, not as separate components. Recommended retail price is \$1200.


More information is available from National Panasonic (Aust.) Pty Ltd, 57-69 Anzac Pde, Kensington 2033 NSW, (02) 662-1222.

Briefly


Etone have released a range of five speakers for professional sound reinforcement and musical instrument applications, four 380 mm (15") models with 100 mm (4") diameter voice coils and 9.5 kg ceramic magnets. For more information, see Etone Pty Ltd, 53 Stanley St, Peakhurst 2210 NSW, (02) 534-3569.



**fact:
calling this a "brush"**

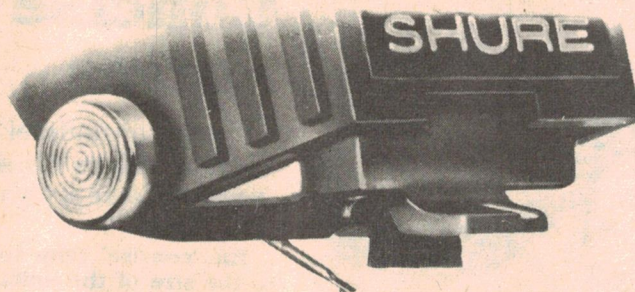

is like calling this a "radio"

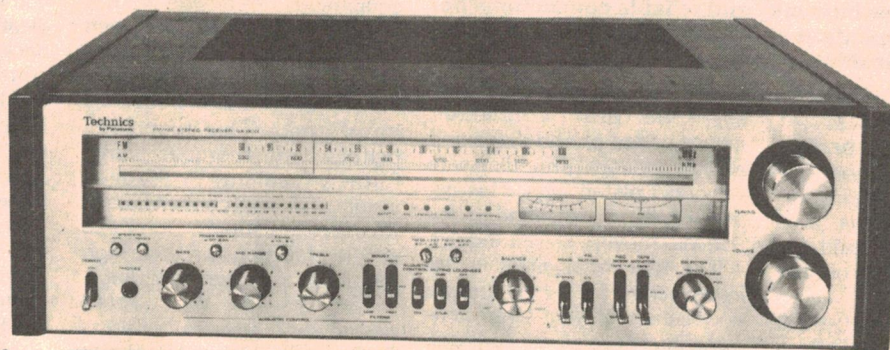

we call it a Dynamic Stabilizer

...critics call it a major innovation

True, the device on the front of a V15 Type IV cartridge bears a superficial resemblance to a cleaning brush. In reality, it is a complex, exquisitely engineered subassembly which performs several complex functions that measurably enhance the quality of record reproduction!

Each one of its 10,000 conductive carbon fibers is positively grounded to discharge ever-present static electricity from the surface of your records. This eliminates static clicks and pops, as well as the tracking distortion produced by the varying electrostatic attraction between the record surface and the tone arm.

What's more, the Dynamic Stabilizer incorporates Shure-developed viscous damping that results in a uniquely efficient suspension system which maintains precise cartridge-to-record distance and uniform tracking

force—even on severely warped records. The stabilizer also acts as a shock absorber to cushion the stylus in case you accidentally drop the tone arm onto the record.


Finally, the tiny carbon fibers are so fine that 10 of them can fit *inside* a single groove to sweep free minute dust particles.

This integrated approach to pure sound reproduction extends throughout the design of the V15 Type IV. It sets a new standard of high trackability at ultra-low tracking forces—even on records that are warped, dusty, and charged with static.

If faithful reproduction of *all* your recordings is of paramount importance to you, we invite you to audition the V15 Type IV with the Dynamic Stabilizer. Or, write for the complete story (ask for AL569).



V15 Type IV...the stabilized cartridge



AUDIO ENGINEERS P/L
342 Kent Street.
SYDNEY 2000 N.S.W.

AUDIO ENGINEERS (Vic.)
2A Hill Street.
THORNBURY 3071 Vic.

AUDIO ENGINEERS (Qld.)
51A Castlemaine Street.
MILTON 4064 Qld.

ATHOL M. HILL P/L
33 Wittenoom Street.
EAST PERTH 6000 W.A.

STAGE & EFFECTS LIGHTING

ALL YOUR REQUIREMENTS AUSTRALIA WIDE

FINALLY WE HAVE IT!



DO YOUR OWN THING -

Standard Lasers are also available, and can be used successfully for do-it-yourself effects — a manual describing effects possible comes with these Lasers.

Models available: LL201 — 1mW.
LL202 — 2mW. LL204 — 4mW.
LL205 — 5mW.


LASER EXPERIMENTERS KIT

A complete course in geometrical and physical optics, including a 44 page detailed lab manual featuring 44 major experiments.

The only complete range of Lasers for the lighting and audio visual industry . . . with full guarantee and national back-up!

The Disco Laser is a complete, ready-to-go unit, which operates from a lineout or aux output of your music source. The unit can be run stereo or mono, and when hooked into an audio signal produces scintillating patterns on the target area. The brilliant red beam of Laserlight cuts through the hazy atmosphere of your venue, producing visible shafts of light travelling to the target area. The brilliant radiating patterns produced by the Disco Laser will hold your audiences in awe and wonderment!

Construction: robust aluminium extruded case, 90x90x600mm, built tough to take it.
Output: 2mW (SAA Class 3A). Other outputs made to order. **Guarantee:** 1 year on Laser tube, 3 months on electronics.

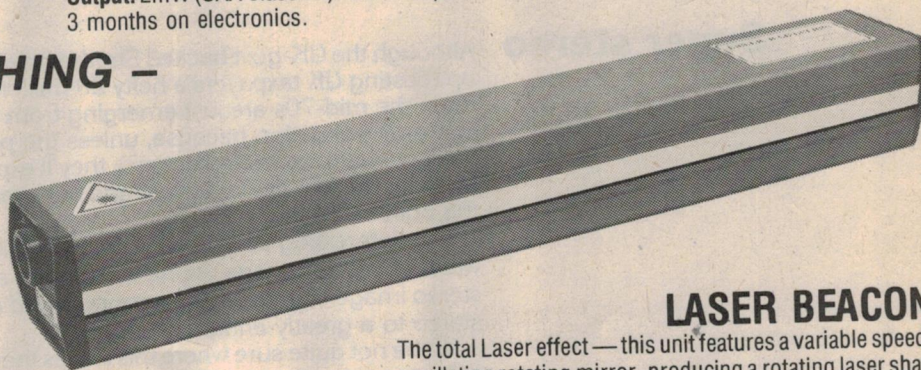

LASER BEACON

The total Laser effect — this unit features a variable speed, oscillating rotating mirror, producing a rotating laser shaft of light, for a full 360 degree lighthouse effect.

ALL LASERS FULLY GUARANTEED (Laser output up to 5mW is completely safe to the human eye).



RAINBOW STROBE CONTROLLER

The most dynamic strobe effect possible — this unit will operate 4 remote strobes in either a chase, flip-flop or flash mode. By placing each strobe on an opposing side of the dance floor and fitting colours to each, a very startling "rainbow strobe" effect can be obtained. This controller will also sequence the strobes and flash them in time with the music, via a built-in mic. The Rainbow Strobe Controller may be used with Ceitex Superstrobes or Superfreeze Flashes. Inter-connection between controller and strobes is by standard 6.5mm jack plugs and standard twin flex.

BUY OR HIRE EVERYTHING IN LIGHTING — SPACE BEACONS — RAINLIGHTS — CHASERS — STROBES — BEACONS — SPOTLIGHTS — DIMMERS — COLOUR FILTERS — SPARE LAMPS — PAR CANS — TRUSS — WINDUP TOWERS — STANDS — AND MORE

Nationwide distribution by

Barratt

Lighting

PTY. LTD.

140 Myrtle St, Chippendale 2008. NSW. Ph (02) 699-7963. Resellers enquiries welcome.

SYDNEY:
Strand Electric
8/11 Barcoo St
East Roseville
(02) 406-6176
Celtex Industries
2/32 College St
Gladesville
(02) 896-2900
WOLLONGONG:
Trilogy Lights & Sound
40 Princes Hwy
Fairly Meadow
(042) 83-1219
NEWCASTLE:
Your Move Lighting
37a Beaumont St
Hamilton
(043) 69-3560

BRISBANE:
Harvey Theatrical
Lighting
21 Crosby Rd
Albion
(070) 262-4622
EDA Sound
10 Ross St
Newstead
(07) 52-8694
GOLD COAST:
Rave Light & Sound
2388 Gold Coast Hwy
Mermaid Beach
(075) 38-3331

MELBOURNE:
Clearlight P/L
17 Alex Ave
Moorabbin
(03) 553-1446
Strand Electric
60 Rosebank Ave
Clayton
(03) 541-8502
Lighting Corporation
131 Brighton Rd
Richmond
(03) 429-5122

ADELAIDE:
Hiwatt Lighting
37 Angus St
Adelaide
(08) 212-2033
Psycho Lites
PO Box 291
North Adelaide
(08) 47-1874

PERTH:
Western Strobe Lighting
1142 Hay St
West Perth
(09) 321-9369
Kosmic Sound
1074 Albany Hwy
Bentley
(09) 361-8981
HOBART:
Tony Miller
25 Castray Esplanade
Battery Point
(002) 23-5150

Cartridges with integral headshells

There's a growing move from cartridge manufacturers to make their product integral with the plug-in headshell. The benefits are improved mounting accuracy, rigidity, compatibility and freedom from uncontrolled resonances. Naturally the integral units plug straight into the standard four-pin bayonet connector.

The principle has now been adopted by Audio-Technica (AT-30), Ortofon (Concorde), Yamaha (MC-1S) and Nagatron for their top-end ribbon cartridge. Many other cartridge manufacturers are known to be actively considering a change-over.

Metal tape standards

Japan's Electronic Industry Association says that the guidelines formulated some time back for a world metal tape standard will be submitted to the IECS very soon.

The major specifications proposed include coercive field strength of 1050 Oe; residual magnetism of 3000-3500 G, maximum output level balance of 3180 Oe at 70 us and magnetic layer thickness of four microns. These specifications are in fact those already used by Japanese companies currently producing metal tapes and hardware.

Super stereo

Although the UK-govt backed Strathearn audio company is currently being wound up (costing UK taxpayers a hefty 20 million pounds) a number of patents applied for in the mid-70s are just emerging from the UK Patent Office. This presents an interesting situation because, unless the patents are sold before the company is finally wound up (wound down?), they'll expire as they come up for annual renewal because the fees will be unpaid and unpayable — hence all the efforts will pass into the public domain.

One interesting patent (BP 1 545 489) is a device which enables the apparent width of "stereo image" to be varied over a wide range. As a control is varied the stereo image changes from a mono blend of the two channels, through "normal" stereo to a greatly enhanced stereo.

We're not quite sure where this leaves the patent but Mullard published details of an apparently similar device nearly a decade ago — we modified it and ran it as a project called Super Stereo in our May 1972 issue. It worked well too.

Super Sony speaker soon

Sony in Japan has just introduced a totally new line of top-end audio products. The range will be marketed under the brand name "Esprit".

Among the new products is the APM-8 speaker — this incorporates a ribbon tweeter, separate midrange driver and a flat honeycomb bass driver. The price is said to be \$5000 ... each.

Class A hybrid

Infinity have just started to market a hybrid (valves and transistors) class A power amplifier. The unit was shown at the recent Harrogate (UK) hi-fi show — the makers claim the design "combines the musical honesty of the old tube amplifier with the practical features of the best new transistor amplifiers" ...

Computer-controlled speaker

American speaker manufacturer KLH has developed a bass enhancing technique. Cone excursion is anticipated by monitoring the output of the power amplifier via a module which they call an Analog Bass Computer. This device apparently compensates for the fall off in bass response characteristic of speaker drive units by winding up the gain as and when required.

US propose audio tape tax

West Germany has for years placed a special tax on tape recorders — the collected money being passed on to GEMA (their equivalent of our Performing Rights Society) to compensate music copyright holders for sales lost due to home record copying.

Now, a similar tax is being proposed in California — in the form of a 5% impost on blank audio tape. However, unlike the German system the proposers suggest the money be used to sponsor concerts, workshops and musical tuition.

Our finest turntable. It won't make a sound.


All unwanted noises have been engineered out of our YP D10. Out of the motor. Out of the turntable. Out of the arm. Even out of the base.

It boasts wow and flutter of less than 0.03%. The signal to noise ratio is better than 62 dB. It even switches itself off silently and without any sudden load on arm or stylus. Because it switches itself off Opto-electrically.

We've doubled the guard on the speed.

Like all direct drive turntables, we use FG

servo to keep the speed constant and a heavy cast-aluminium platter to provide inertia. But FG can be fooled by voltage changes and thermal differences. So our ace up the sleeve is a Quartz PLL

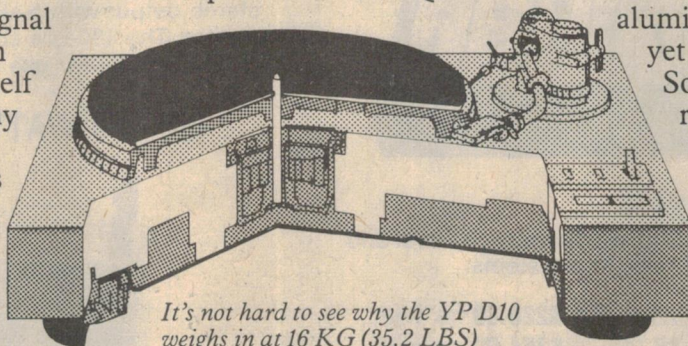

It's not hard to see why the YP D10 weighs in at 16 KG (35.2 LBS)

servo-system. It's completely fool-proof.

Our turntable comes fully-armed.

The YP D10 has its own precision-designed tone-arm. It's an aluminium alloy which is lighter yet more rigid than aluminium. So while it tracks more accurately, it's also more resistant to feedback vibration. The support is a gimbal, to allow it freedom to move up, down and sideways and thus follow every nuance of the recording. Even the cable is different from conventional signal cables. It has $\frac{1}{3}$ the normal resistance to transmit every subtlety your cartridge is capable of.

Our base blocks feedback.

Some turntables are sprung to avoid vibration and feedback. We've gone one better by sinking ours into a solid base. It absorbs all vibration before it can produce howl. And to make doubly certain, we've stood the whole unit on felt and rubber feet.

Not so long ago the truly musical turntable was hard to find. And when you found it you had to buy an arm separately. But now there's Yamaha YP D10. Hear it.

It won't make an unwanted sound.




Y553



jaycar

PTY. LTD.

380 Sussex St, Sydney.
(Between Goulburn & Liverpool)

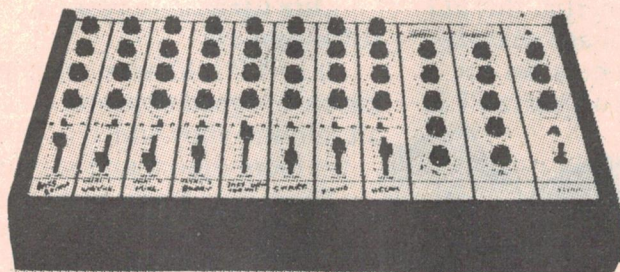

414 8-CHANNEL MIXER

With our special offer you will have 200 watts of power and an 8-channel mixer for P.A. or disco systems.


Complete kit of 414 master mixer only **\$220.80** tax free
P&P \$6.00 **\$254.00** tax paid

Complete kit of 480 slave amplifier only **\$91.30** tax free
P&P \$4.00 **\$105.00** tax paid

Special offer

One 414 kit and two 480 kits only **\$374.00** tax free
P&P \$12.00 **\$430.00** tax paid

AUDIO SPECTRUM ANALYSER

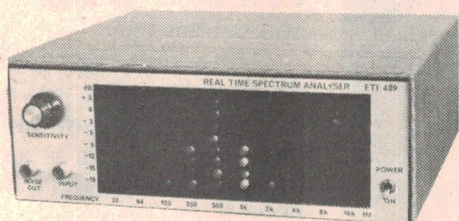

The 489 Analyser can be used in conjunction with a Graphic Equaliser to accurately equalise systems for room acoustics.

Features:

- Ten octave spaced displays.
 - LED readout in 3 dB steps.
 - Input sensitivity control.
 - Inbuilt pink noise generator.
- Complete kit includes matched LED's, polarised plastic display, complete metalwork, etc.


ONLY \$142 plus \$3 freight.

Please include two 20c stamps with all enquiries.


NOW AT NEW PREMISES

To celebrate our move we are offering a substantial saving on the purchase of our top selling kits. The 414 Mixer offers 8 input channels with tone controls and echo sound, stereo output with 5-stage equalisation and meters. The 480 is a compact 100 watt slave amplifier ideal for use with the Master Mixer

480 100 WATT SLAVE AMP

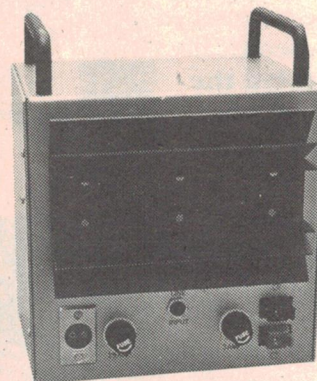

485 GRAPHIC EQUALISER

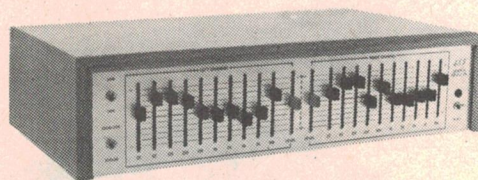

- 10 adjustable controls on one octave centre frequencies (independent for each channel).
- Symmetrical mirror image boost and cut of 13 dB at any centre frequency.
- Full spectrum gain control for each channel with a range of 14 dB gain to 9 dB attenuation.
- Vertical slide controls give a graphic representation of the resulting response curve.
- 100 percent monolithic active circuitry. Hum, ring and saturation free gyrator design.
- Facility for tape monitoring.
- Optional standard 19" rack mounting adaptor available.

COMPLETE KIT \$118. P&P \$3.

jaycar

PTY LTD

PO Box K39, Haymarket.
NSW. 2000. 380 Sussex Street.
Tel: 211-5077.

THE ULTIMATE MACHINES.



SA CASSETTES: OVERTURE TO THE WORLD OF QUALITY MUSIC

Features of SA:

- Greater coercivity and much finer magnetic particles with greater length-to-width ratio than conventional magnetic materials.
- Magnetic particles of SA gives personal treatment to each and every signal, thereby helping to yield a clearly defined sound which is crystal clear. It extends the flat frequency response range from the lowest lows to the highest highs, giving expression to the many sounds and moods of music as they were intended to be heard.
- It handles exceeding high signal inputs without distortion which is due to increased MOL providing a full dynamic range for both recording and playback. SA uses the 70 micro-second playback equalization position (High or C.O₂) on your deck for a greatly enhanced signal-to-noise ratio and reduced noise level.

AD CASSETTES: FAITHFUL 'REAL LIFE' REPRODUCTION

Features of AD:

- High MOL (Maximum Output Level) at the high end is perfectly capable of recording and playing pop, rock and jazz music sources with plenty to spare.
- Frequency response which extends right up to the high ends. That is why the treble comes through loud and clear.
- Features a bias curve which is broad and this enables the tapes to cope with a wide range of different tape decks.
- Does not require selection of special bias and equalization settings, the Normal position will do. This means that anyone can play back and record the tapes on any kind of deck.




Both SA and AD feature the new TDK super precision cassette housing made to 10 times the accuracy of the original specifications.



TDK (Australia) Pty. Ltd.,
4 Dowling Street,
Woolloomooloo, N.S.W. 2011
(02) 358-2088

You'd be surprised how dramatic an improvement can be achieved by carefully optimising the adjustments on your record player cartridge. Allen Wright and Rowan McCombe of Sydney's Audiolab show how it's done.

How to improve your hi-fi's sound

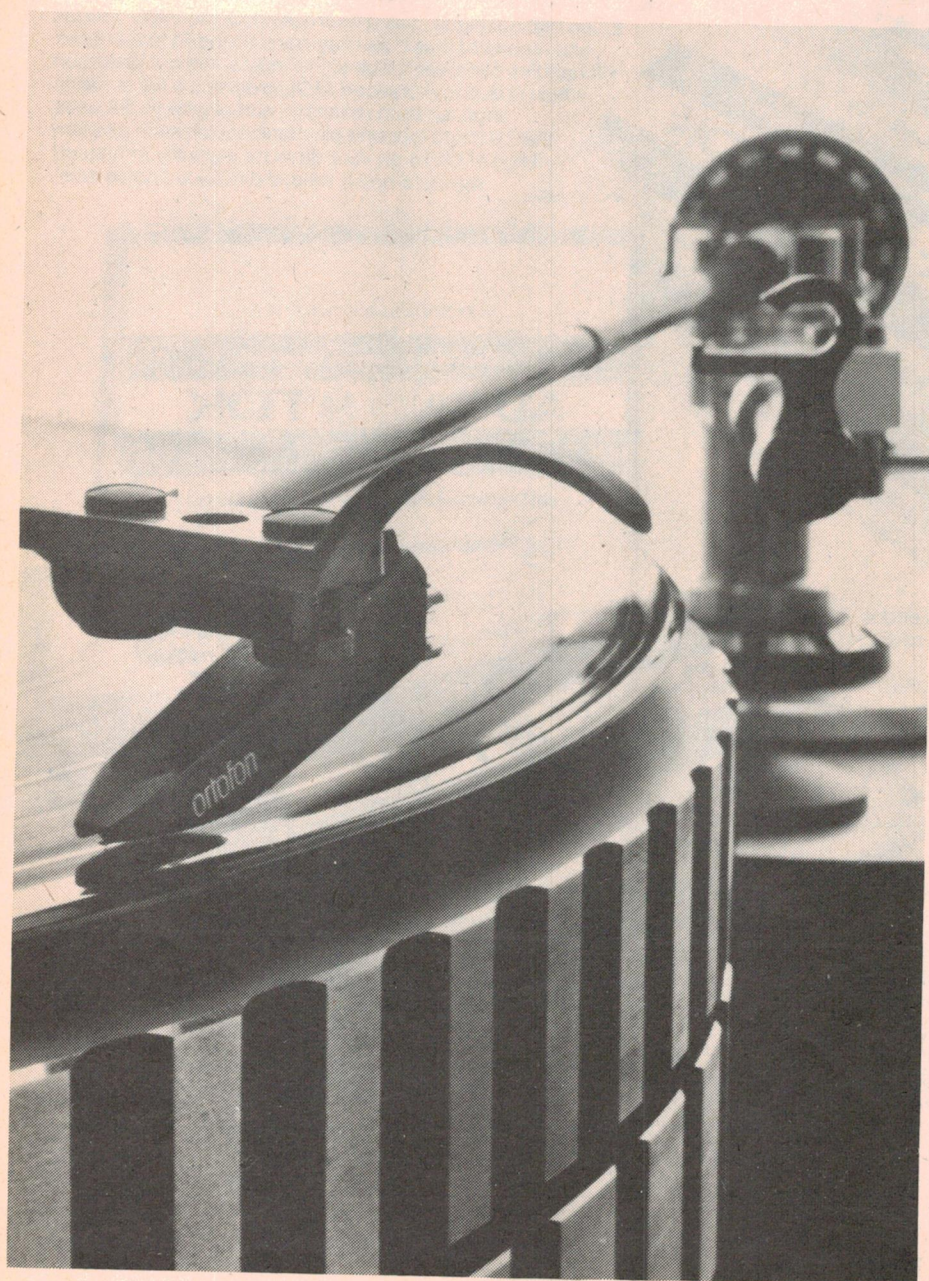

MARK LEVINSON Audio Systems claim that their electronically controlled straight line tracking arm will extract up to 30 dB more dynamic range from a disc than is normally achievable with conventional arms.

If this is so, it is primarily due to the accuracy with which the cartridge is held in the groove, and that the stylus assembly is used simply to extract information from the groove — and *only* that.

It thus follows that it should be possible to improve the dynamic range of conventional tone arms by using similar principles.

The authors of this article have spent many years designing and building audio equipment to provide the best possible standards of reproduction (remember the Wright AM tuner?) and have found that a very considerable increase in dynamic range can indeed be obtained by very careful attention to the cartridge/arm/disc combination.

First, some definitions of terms used and the theory behind these ideas.

Definition: The ability of a system to resolve fine detail in the signal.

Depth: The perception that the reproduced performers are placed at varying distances from the listener, sometimes in front of the speakers, but more commonly behind the speakers.

Theory: Assume the musicians have played one note and continue on to play more. In the recording environment, that note would decay in volume at a rate determined by the acoustics of the room or hall. A listener at the live performance would hear this note decay, and perceive a dynamic range from the original level of the note (say 110 dB) down to and below the ambient noise level of the room (say 30 dB). This would be a range of 80 dB.

The listener uses this reverberation data to compute the distance and direction of the individual performers, and to gain an impression of the size and shape of the space in which they are playing. To obtain a similar dimensional accuracy and realism in a disc playback system, the system must be able accurately to reproduce a similar dynamic range, as well as maintaining precise phase accuracy over the whole frequency range and *between channels*.

Effective dynamic range: A system of 100 watts output and a noise level 70 dB below full output, may in theory be considered to have a dynamic range of 70 dB, i.e., from noise level up to full output. With a sine wave input, under laboratory conditions, such a range may well be achieved — but it won't effectively reproduce *music* with this wide

As errors increase, the image may only be accurate in the region of one speaker, the other speaker putting out sound but this sound seeming to be divorced from the stereo image. Beyond this, no accurate stereo image is present, either the performer seems to be either "over there" to the left or "over there" to the right.

To obtain really three-dimensional imaging the ultimate in transducers and electronics is required, but any good system can be improved by following the procedure to be described. However, the better the equipment, the easier it is to hear and appreciate the improvements.

Equipment

Turntable: Naturally the best possible unit will give the best possible results.

Mk VI's, but other cartridges that use a positive pivot point for the cantilever rather than a hysteretic rubber pivot should perform well and be worth the effort required to set up correctly.

Set-up procedure

Your ears must be the only judge of how things are working. The final settings will be close to the "by the book" settings but as the only test is "how does it sound", any adherence to "the book" may inhibit you obtaining the best results.

Be warned that this set-up method can take a long time to optimise. At first you may not be able to hear changes in the sound from adjustments made. Persevere and your awareness of sound qualities will improve and you will come to be able to hear very small changes

....without depleting your wallet

range, for when this amplifier is called upon to amplify a complex music signal to full output, the distortions created (harmonic, intermodulation, transient intermodulation, and any others not yet isolated), cause a loss of low-level signals through masking by these distortions, and by modulating background noise.

These are the factors which cause the 'compressed sound' from some equipment, and poor performance under listening tests, in particular lack of depth.

In the above example of a listener at a recording session, 80 dB of dynamic range is acoustically available in the studio. But played back over a system with only 30 dB of Effective Dynamic Range (E.D.R.) 50 dB of dynamic range is lost. And there goes the realism of the live performance — and the "depth".

The system

As the arm/cartridge/cartridge/disc system is the starting point in the replay chain, any losses of information in the signal at this point cannot be retrieved later in the chain, no matter how superb the electronics or speaker system.

We have proved beyond any doubt that, even with very high definition cartridges, electronics and speakers quite small errors in setting up cartridge tracking parameters caused stereo image shifts, loss of definition and serious loss of E.D.R.

As the errors increase from a perfect set up, the first property to go is depth. The three-dimensional stereo image reduces to a flat perspective, but with the left to right data maintained accurately.

We strongly favour the new range of belt-drive turntables that are being made in England, as giving noticeable sonic improvements over other top-line equipment.

Arm: Our set-up procedure involves critically adjusting the antiskating correction, arms that have a fixed amount of antiskating applied are not suitable, in our opinion, for a high-quality system. No high definition cartridge can give its best in terms of stereo imaging and E.D.R. without antiskating being correctly applied.

Some cartridges work only in damped arms, others are already well damped and need an undamped arm to avoid sounding "mushy". Experimentation is required to decide the best for your cartridge.

Cartridge: We use specially rebuilt Decca

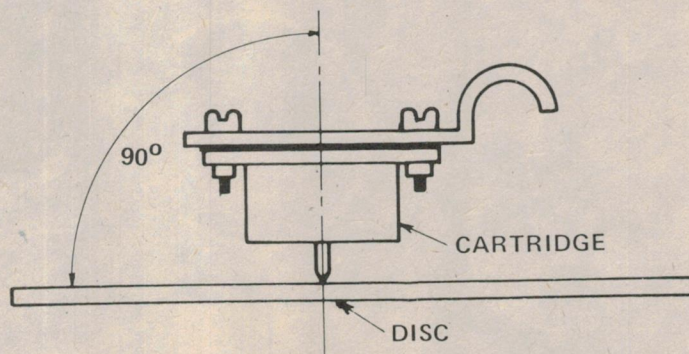


Fig. 1. The stylus must be perfectly vertical in the groove.

with certainty.

This procedure is much easier to do if your preamplifier allows you to monitor either the left or right input over both speakers or good headphones. This allows instant comparisons between channels, which is the key to this procedure.

STEP 1: Refer Fig. 1. The stylus must be perfectly vertical in the groove as viewed from the front. Any slightly "off vertical" alignment must be corrected. A unipivot arm can pose problems in ensuring this adjustment is stable and accurate. If it is not, no other changes will optimise the system.

STEP 2: Refer Fig. 2. Set the vertical tracking angle of the cartridge by using the *mounting platform of the cartridge* as the guide, not the arm. This may be changed later but level the cartridge for the present. ►



'D' series high efficiency speaker systems

The LD D Series enclosures are an excitingly new concept in loudspeaker design — the component parts and range have evolved from the highly successful LD A Series — the first enclosures produced by LD some five years ago. This range of enclosures reflects the latest trend in speaker design plus a most pleasing departure from the conventional.

Model LD-D-12522H

System Type 12" 4 way 5 Speaker
 Speaker Component:
 Bass Driver 12" Roll Surround High Compliance Bass Drive Unit
 Mid Range 5" Curvilinear Cone Type
 Tweeters Two x 2" Cone Type and one x 3" Super Horn
 Power Capacity 50 watts RMS Integrated Programme
 Frequency Response 25 Hz to 20,000 Hz \pm 3 dB
 Crossover Frequency 1,000-5,000-10,000 Hz
 Nominal Impedance 8 ohms at 1,000 Hz
 Dimensions 685mm H x 470mm W x 340mm D
 Colour Australian Walnut



Model LD-D-104H

System Type 10" 3 way 3 Speaker
 Speaker Component:
 Bass Driver 10" Roll Surround Bass Drive Unit
 Mid Range 4" Curvilinear cone type
 Tweeter 3" Horn
 Power Capacity 30 watts RMS integrated Programme
 Frequency Response 35 Hz to 18,000 \pm 3 dB
 Crossover Frequency 1,000-5,000 Hz
 Nominal Impedance 8 ohms at 1,000 Hz
 Dimensions 610mm H x 360mm W x 270mm D
 Colour Australian Walnut

Model LD-D-1555H

System Type 15" 3 way 4 Speaker
 Speaker Component:
 Bass Driver 15" Cast Chassis — Edge Treated High Compliance Bass Drive Unit
 Mid Range Two x 5" Curvilinear Cone Type
 Tweeter High Efficiency 3.5" Metal Horn Super Tweeter
 Power Capacity 65 watts RMS Integrated Programme
 Frequency Response 20 Hz to 20,000 Hz \pm 3 dB
 Crossover Frequency 1,000-5,000-10,000 Hz at 12 dB/octave
 Nominal Impedance 8 ohms at 1,000 Hz
 Dimensions 795mm H x 510mm W x 360mm D
 Colour Australian Walnut

Model LD-D-125H

System Type 12" 3 way 3 Speaker
 Speaker Component:
 Bass Driver 12" Roll Surround Bass Drive Unit
 Mid Range 5" Curvilinear Cone Type
 Tweeter 3" Horn
 Power Capacity 40 watts RMS Integrated Programme
 Frequency Response 30-18,000 Hz \pm 3 dB
 Crossover Frequency 1,000-5,000 Hz
 Nominal Impedance 8 ohms at 1,000 Hz
 Dimensions 685mm H x 390mm W x 340mm D
 Colour Australian Walnut

Manufactured in Australia by

JORLEN AUDIO INDUSTRIES P/L

NSW DISTRIBUTION

Jorlen Audio Industries P/L,
 23 Cooleen St, Blakehurst.
 Ph. 546-7000, Telex AA21338.

VIC DISTRIBUTION

N.V. Dale Electronics,
 274 Victoria St, Brunswick.
 3056. Ph. 387-6170.

Distributors in other States required.

If you thought
REVOX
made the
world's finest
integrated
Hi Fi equipment

B790 turntable
B77 tape recorder
B750 stereo amplifier
B760 digital FM tuner
Speaker systems
Accessories
Audio rack

You're right.

For details and name of your
nearest Revox dealer, contact . . .

Syntec International Pty Ltd — 53 Victoria Ave,
Chatswood. NSW. 2067. Telephone: (02) 406-4627.
Syntec Victoria — 136 Langridge St, Collingwood. Vic.
3066. Telephone: (03) 419-4644
Athol M. Hill — 33-35 Wittenoom St, East Perth. WA.
6000. Telephone: (09) 325-7811.
Sydney G. Hughes — 154-158 Arthur St, New Farm. Qld.
4005. Telephone: (07) 358-1422.
Blackwood Sound — 4 Coromandel Pde, Blackwood. SA.
5051. Telephone: (08) 278-6888.

REVOX

Trade enquiries welcome



Improve your hi-fi's sound

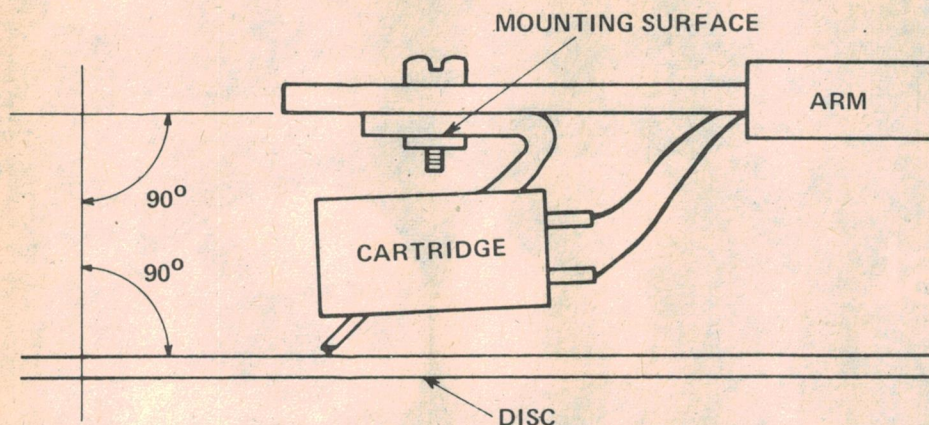


Fig. 2. The cartridge's vertical tracking angle is initially set as shown.

STEP 3: The stylus overhang at this point should be set per the alignment adjustments issued with the arm. Set it accurately!

STEP 4: The tracking weight should be set to the light end of the cartridge manufacturer's recommended value.

STEP 5: Buy a new (preferably import) copy of a record well known to you, of either a live recording with lots of natural reverberation, or a studio disc with good artificial reverberation.

STEP 6: Play an outside track and switch the preamp between the left and right channels. Adjust the balance controls to get the sound level accurately balanced (It is assumed that the speakers you use are in phase and hence give a definite centre image in mono mode). This step must be done after each adjustment to ensure the level is equal before doing other comparisons.

STEP 7: Switch to stereo, and sitting dead centre between the speakers as per Fig. 3 (if not using headphones), listen carefully to the test track.

STEP 8: One channel will almost certainly seem to have more life, more dynamics than the other, which will sound a little "flat" in comparison. Switch to each channel in turn to get a real impression of this. Do not blame the record for this unequal effect. Good records are very consistent between channels.

STEP 9: Reduce the antiskating adjustment to zero and increase it a little at a time. After each change, listen for a shift between channels of this "liveness". (Usually the right channel loses E.D.R. first for small changes of antiskating either side of optimum.)

STEP 10: Having found what you are certain is an optimum point for the antiskating, you can now move on.

What you are actually listening for is an increase in E.D.R. If you are not using phones, listening to the speaker from a distance of one foot or so will allow a better judgement of changes.

The final purpose is to optimise the "depth" in each channel and to equalise it between the channels, to obtain optimum definition and stereo image.

Using the same method of checking, i.e., an optimum balanced E.D.R. in each channel, slide the arm fore and aft in its mounting base to vary the cartridge overhang distance. Vary it by *very* small amounts, 0.25 mm or less at a time.

If the arm is fixed on the base, the cartridge may be moved in the headshell. This is, however, rather dangerous as it's easy to change the offset angle as well as the overhang, giving two variables at once which makes for an almost impossible situation to optimise. It's far better to cut a slot in the base to allow the arm to be moved rather than adjust at the headshell.

The same effects heard when changing the antiskating will occur. One channel will get better, then the other will also come in until an overall balanced increase is obtained.

STEP 11: With the overhang optimised, the antiskating is again varied to find a new optimum as per Step 9. It should only need a small change to again optimise it.

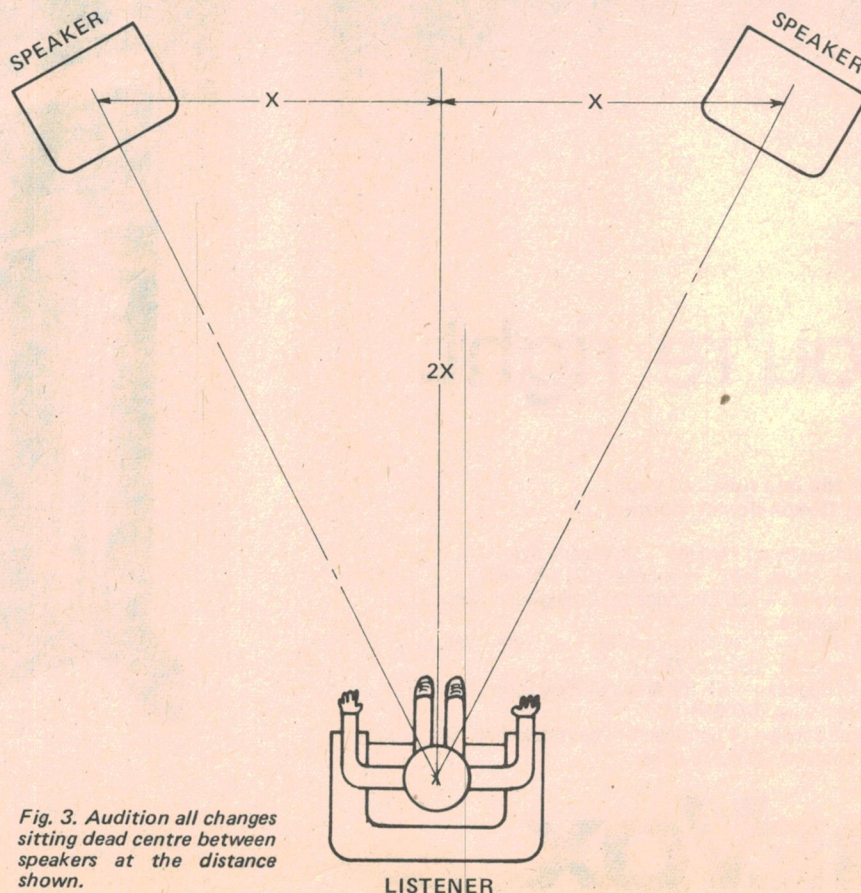


Fig. 3. Audition all changes sitting dead centre between speakers at the distance shown.

STEP 12: Now repeat Step 10 and Step 11 as a sequence, i.e., 10, 11, 10, 11, etc., until the absolute is obtained. Three times through should be enough.

STEP 13: Now the offset angle of the cartridge in the headshell can be varied small fractions of a degree to see if an improvement can be found. NB. Do not lose the overhang setting while changing the angle!

If a change does improve matters, Steps 10 and 11 will need to be repeated in the sequence 13, 10, 11, 13, 10, 11, etc.

STEP 14: At this point the vertical tracking angle can be varied by raising or lowering the arm in its mount. This may or may not show an improvement.

An article in the September 1977 issue of the UK magazine "Hi-Fi for Pleasure" claims that certain cartridges may show an actual tracking angle of 25° to 30°, rather than the design value of 15° to 20°, which can cause high distortions. Decca's, however, never

seem to need more than a degree or two to optimise.

STEP 15: By now, with the geometry near perfect, a benefit may be heard by reducing the tracking weight, thereby reducing stresses on the stylus assembly, and allowing it to work a little more effortlessly. As the tracking geometry is now optimised, the tracking should be improved, and the system not requiring so much weight to track accurately.

Any change in tracking weight will require an antiskating correction, but not normally the other variables.

Problems

Even after all these adjustments, it may not be possible to get the channels equal. This indicates that either the cartridge or the preamp is not adequately channel matched. Correction of this is beyond the scope of this article but it is possible to find out which component is at fault.

Switch the preamp to the "good" channel only. Then reverse the leads from the cartridge at the amplifier input. If the E.D.R. remains, the cartridge is OK and the preamp at fault. If the E.D.R. drops down, the cartridge is faulty.

Conclusion

By now the stereo and depth performance of your system should be noticeably improved.

There appears to be a lot more information on discs than has been considered in the past. It takes the absolute best in components and their set up to get this information to the preamp, but the results will be seen to be worthwhile. The concept of dynamic range and stereo image as the major value in a hi-fi system is new, but exposure to such a system is an experience not soon forgotten.

Real audiophile systems are getting away from the specifications race and into realism and using listening as the only valid test. We hope this article helps in furthering this move. ●

FREE

1980 CATALOGUE

AVAILABLE NOW

From Over 200 Tandy Stores
& Participating Dealers

The Nationwide Supermarket of Sound



The world's first long-playing cassette deck...



...is a Nakamichi, of course!

Imagine being able to record *three hours* of music on a C-90 cassette with the kind of fidelity only Nakamichi can deliver. Wishful thinking? Not with the new Nakamichi 680 2-Speed Discrete Head Cassette Deck. In addition to the standard tape speed of $1\frac{7}{8}$ inches per second (ips); the 680 is capable of record and play at half-speed, namely $15\frac{1}{16}$ ips. And what's really amazing is that the 680's performance at half-speed is equal to or better than that of many modern component-quality cassette decks running at normal speed! Especially when combined with the new metal particle cassette tapes, the 680 at half-speed provides more than ample dynamic and frequency range for the recording of high-quality commercial program material (disk or FM).

As you might imagine, there is some formidable technology embodied in the Nakamichi 680. This technology not only makes half-speed a reality, but also elicits the last ounce of performance from today's advanced tape formulations at standard speed.



From CONVOY INTERNATIONAL, 4 Dowling Street, Woolloomooloo, Sydney. 2011.

Fisonic Audio


121 BATH RD, KIRRAWEE,
NSW. 2232. Ph: (02) 521-1688

New Speaker Kits!

Kits Contain: All necessary screws, Screwdriver, Glue, Innerbond, Cloth baffle (with cloth already on), All necessary wire and crossovers, Push terminal plate, Full set of instructions, All speakers, Fully machined woodwork.


GENERAL INFORMATION:

1. The kits are designed to be assembled with no previous experience.
2. The kits come complete with all materials and tools required.
3. All kits are made from 3/4" timber (not 5/8" as most kits)
4. Prices are for pairs and includes sales tax, freight and insurance anywhere in Australia.
5. Kits are shipped within 48 hours of receipt or order.
6. Kits are fully operational 3 hours after assembly and require no polishing or finishing apart from wiping over with damp cloth.
7. Send cheque or money order only.




12HKF

Size 620 x 455 x 290
Max input 70W RMS
20 Hz — 20 KHz
Infinite baffle design
12" Woofer
Midrange Exp. Horn.
4" Dome tweeter
Twin attenuators
Price: \$320.00



12KF

Size 620 x 455 x 290
Max input 50W RMS
20 Hz — 20 KHz
Infinite baffle design
12" woofer
5" midrange
4" tweeter
Twin attenuators
Price: \$220.00




103HKF

Size 600 x 396 x 270
Max input 50W RMS
20 Hz — 20 KHz
Reflex design
10" woofer
4" midrange
2" dome tweeter
Twin attenuators
Price: \$200.00


103KF

Size 600 x 396 x 270
Max input 25W RMS
25 Hz — 18 KHz
Infinite baffle design
10" woofer
4" midrange
3" tweeter
Price: \$175.00



83KF

Size 515 x 300 x 225
Max input 25W RMS
28 Hz — 18 KHz
Infinite baffle design
8" woofer
4" midrange
3" tweeter
1 attenuator
Price: \$130.00



82KF

Size 515 x 270 x 225
Max input 18W RMS
30 Hz — 15 KHz
Infinite baffle design
8" woofer
3" tweeter
Price: \$105.00

Sound on Stage Pty Ltd

405 KENT ST, SYDNEY.
Ph: 29-7426, 29-4558.
AH: 528-5593.

PROFESSIONAL and DOMESTIC AUDIO EQUIPMENT

● Sales, Hire and Service

● Disco Installation ● P.A. Sales, Service, Hire


- ELECTRO-VOICE
- JBL
- YAMAHA
- ALTEC
- JANDS
- SHURE
- SENNHEISER

- BEYER
- MARANTZ
- AMCRON
- SPECTO ACOUSTICS
- AKG
- KOSS
- BOSS

- Microphones
- Power Amps
- Mixers
- Speakers
- Speaker Enclosures
- Equalizers
- Amp Racks

Digital recording, the next revolution in audio

Digital recording techniques will undoubtedly revolutionise sound reproduction in a few short years. They promise marvellous quality but the price you'll pay at the moment is prohibitive. Professional recording organisations are just now considering the digital gear on offer. Here is a short overview of what the digital recording revolution is all about.

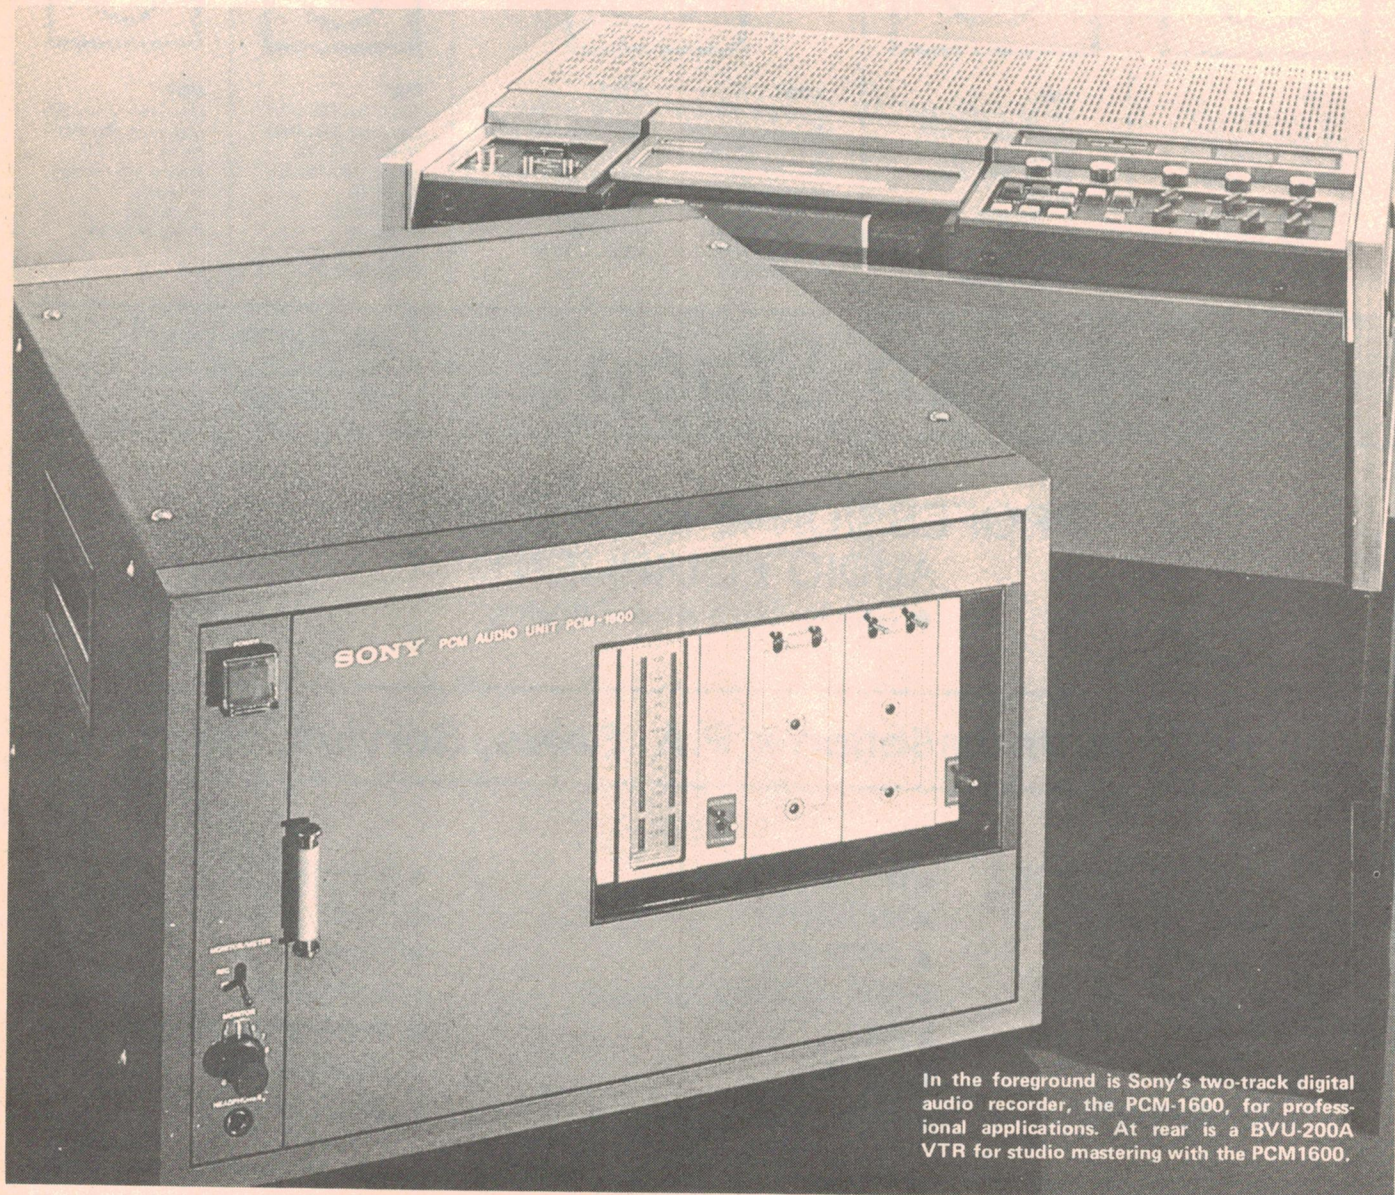

In the foreground is Sony's two-track digital audio recorder, the PCM-1600, for professional applications. At rear is a BVU-200A VTR for studio mastering with the PCM1600.

HOW MUCH MUST YOU PAY FOR A PAIR OF "DYNAMITE" SPEAKERS?

Would you believe that you can step up from merely "OK" to "absolutely dynamite" for only about \$110 per speaker?

Well it's true.

For only about \$220 an AR dealer can put you into a pair of AR18s... an amazing listening experience that sounds a lot more expensive than it really is.

This is what you'll hear.

A firm, well-controlled, reproduction of source material. Accurate and uncolored by minor resonances in the speaker itself.

A nice flat response curve. In layman's language that means bass notes that don't get

AR SPEAKERS RANGE IN PRICE FROM ABOUT \$110 TO ABOUT \$1350. THIS IS THE \$1350 ONE — THE INCREDIBLE AR9. ALL ARE COVERED BY THE SAME 5-YEAR WARRANTY WHICH AN AR DEALER WILL SHOW YOU.




overemphasized. Middle frequencies, where vocal passages occur, that come through beautifully. And, on the high end, strings that don't sound over bright.

There are, of course, other AR speakers beside the AR18 which boast these qualities. The bigger they come the more power they'll handle and more sound level they'll produce.

But size doesn't determine quality at AR, and every AR speaker is built (in our own factories) to deliver the same thing: truth in listening.

So stop fooling around. Buy a pair... any pair. Discover what the smart money's learning all the time. That listening to a pair of dynamite speakers can really be a blast.

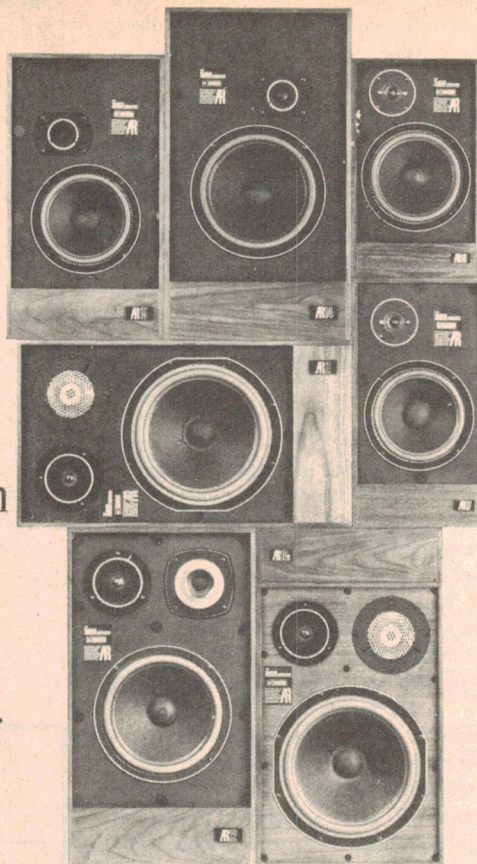


READ ABOUT THEM ALL. OUR FULL COLOR BOOKLETS DESCRIBE THESE SPEAKERS AND HOW TO MAKE YOUR CHOICE. GET ONE FROM YOUR DEALER OR WRITE TO AR AT THE ADDRESS BELOW.



Truth In Listening

ACOUSTIC RESEARCH AUSTRALIA

3 Ford Street, PO Box 21,
Greenacre, NSW. 2190
Tel: 642-2595

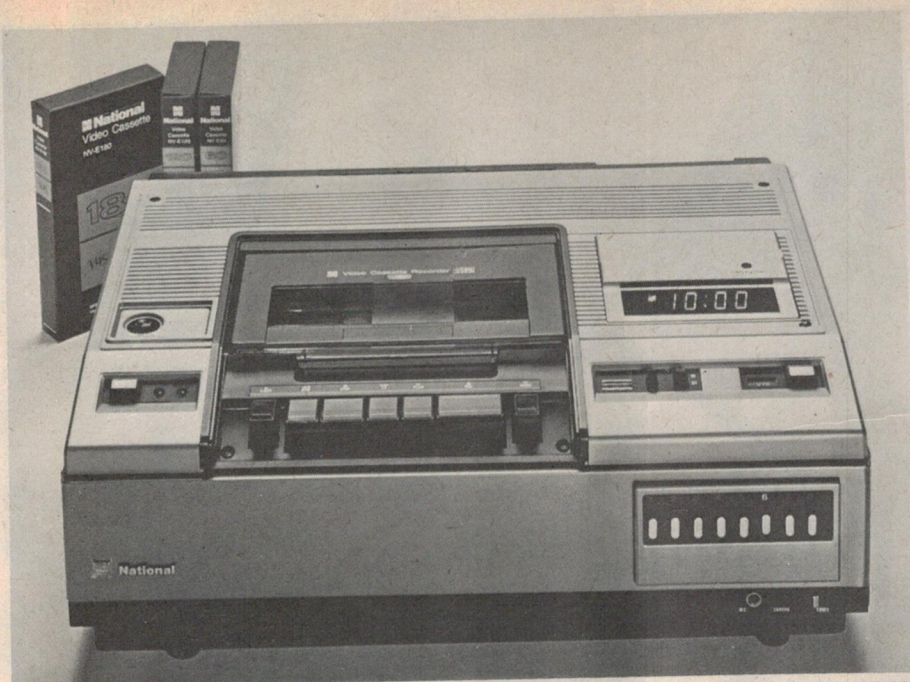

Most of the common video cassette recorders (VCRs) available may be used to record PCM encoded audio when used in conjunction with a special digital processor.

responding third harmonic distortion figures are 0.22% and 0.0079%.

Although these figures are approximate and only apply to one particular digital and analogue system, they nevertheless illustrate why digital systems show very great promise. The lower signal-to-noise ratio of the digital system can also be seen in Fig. 1. The noise corresponds to the signal level at points well away from both the 5 kHz fundamental and from the 10 kHz and 15 kHz harmonics; it can be clearly seen that the noise in the digital system is over 10 dB less than that in the analogue system at all of the high audio frequencies (which are the primary noise sources in tape hiss).

It is claimed that wow and flutter are totally inaudible in a high quality digital system, whilst the frequency response is quite flat over the whole of the audio range. A further advantage of digital recording is that the tape is more stable with time and is less readily affected by small magnetic fields. Digital recordings can be copied to produce a copy which is, for all practical purposes, as good as the original even if a number of successive copies are made from the copied tape. On the other hand the copying of analogue recordings always increases the noise level, this increase depending very much on the quality of the equipment employed; however, it is never less than a few decibels for each successive copying operation.

Digital systems

One of the problems connected with the digital recording systems at present

being developed is their lack of compatibility. That is, a digital recording made using a system developed by one manufacturer cannot be replayed on equipment made by another manufacturer.

In general, the digital systems proposed for professional equipment employ 14 or 16 bit linear pulse-code-modulation encoding systems. An input analogue signal to be encoded is first fed to an analogue-to-digital converter which has a typical sampling rate around 40-50 kHz. The output from this converter undergoes an error detection process which generates correction pulses to be compounded with the signal. The resulting output is suitably formatted and recorded on a digital tape recorder which is rather similar to the recorders used in digital instrumentation applications.

The replay operation involves the recovery of the digital signal from the tape and error correction for any bits of information which have been lost or for any noise pulses introduced. A digital-to-analogue converter is then used to generate the analogue audio signal. Digital pulses are removed by a suitable filter.

Such a digital recording system is complex and its design is made more difficult by the high data rates at which it must operate. Bit rates of the order of 2 Mb/s are required in a good audio system with full error correction facilities. Undoubtedly large scale integrated circuits will be developed in due course for digital recording systems, but at the present time prices seem to be of the order of several tens of thousands of



NORTRONICS

AUDIO & DIGITAL TAPE HEADS



for long life extended response

- Replacement heads for cassette decks, reel to reel decks, cartridges and cassette recorders. Also professional recorders and duplicators.
- Will fit AMPEX, SCULLY, TEAC, ATC, GATES, PENTAGON, IFONICS and many more.
- Complete range of Alignment tapes for cassette, reel to reel and cartridge decks.
- REGULAR MAINTENANCE ENSURES CONTINUED OPTIMUM PERFORMANCE. Nortronics manufactures a full range of audio care products.



MAGNETIC TAPE
DEVELOPER



ALIGNMENT
TAPES



BULK
ERASER



TAPE
HEAD
CLEANER



TAPE
SPLICER

- NORTRONICS audio care products are designed to care for and maintain your valuable recording equipment.
- SEND TWO 20c STAMPS FOR OUR FREE BROCHURE ON THE COMPLETE NORTRONICS RANGE.

E.I. EMAC
INDUSTRIES Pty. Ltd.

2 Bengal Crescent, Mount Waverley.
Vic. 3149. Ph: (03) 277-9989.

dollars for any equipment likely to be released for high quality work during the next year or two. This is around fifteen to twenty-five times the price of high class analogue equipment.


One of the most important problems discussed by the International Audio Engineering Society at a meeting in New York was the standards which are to be adopted for the encoding format and for the sampling rate. One cannot conveniently convert a recorded signal at one sampling rate to a digital signal at another rate without first changing to the analogue form and this would result in a loss of most of the advantages of the digital technique. Direct digital-to-digital conversion involves complex and expensive equipment, although Sony, at least, offer a unit. It is therefore vital that a suitable standard is adopted so that digital tapes can be replayed on any standard equipment of any manufacturer.

Many manufacturers are very interested in the use of digital techniques. In Europe Philips are almost certainly the leaders, whilst the US manufacturers Ampex, 3M and Soundstream are strong competitors. The Japanese are very strong with Matsushita, Sony, JVC and Pioneer all working in the field; indeed, the Japanese commenced the work on audio digital recording.

Until the equipment for digital recording has been available for a long enough period for prices to fall, no manufacturer can expect high volume sales to the domestic user. Indeed, we have the familiar chicken-and-the-egg situation where volume sales will not occur until prices fall and prices will not fall until volume sales take place. In any case, it seems likely that it will be about a year before the first digital high quality recording systems become available to those able to afford them. At the present time only the 16 bit conversion has become accepted as a standard and we must wait for standardisation of sampling rates, tape speed, error correction systems, data formatting and tape track size. System standards must be adopted before there can be any question of a substantial fall in the projected price or even the ready availability of digital recording equipment.

Discs


In the field of digital recording on disc, the Dutch Philips Company seems very confident that a compact digital hi-fi system which was introduced early in 1979 will become widely accepted by the audio trade. One of the great advantages of the Philips system is its rela-

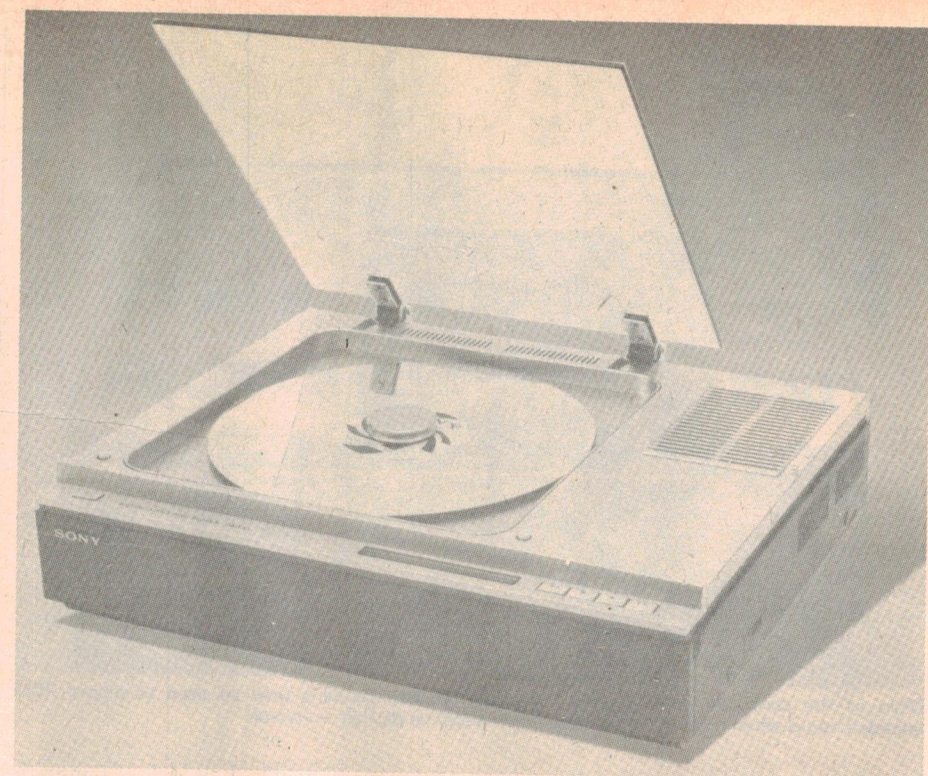

Digital disc systems provide ultra-high density recording — 2½ hours per side for Sony's DAD-1X, and feature claimed dynamic ranges better than 90 dB with THD figures around 0.03 - 0.05%. A helium-neon laser 'reads' the disc in the above machine, signals consisting of 16-bit linear quantized PCM pulses. Surface wear, dust and handling do not affect the discs. Wow and flutter is claimed to be undetectable, even though the disc rotates at 450 RPM!

tively small size. The discs are about 114.5 mm in diameter and the complete equipment is relatively small; this brings various advantages such as its convenient use in a car.

Other manufacturers currently developing digital disc recording systems are making them suitable not only for

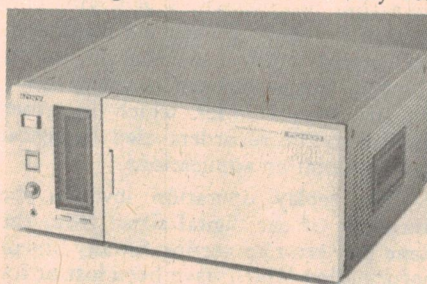

This digital processor, a Sony PCM100, enables recordings to be made on a video cassette.

audio, but also for videodisc equipment which enables television programmes to be recorded. Competition comes mainly from the Japanese in this field in which Pioneer, Sony and JVC are very active.

Philips expect to market their "Compact Disc" system early in the 1980s and they claim this will provide sound reproduction superior to anything currently available on either disc or tape for the domestic market. Philips say the price of this system will be

comparable with that of good quality conventional hi-fi record players.


The "Compact Disc" player employs a diode laser in the pick-up arm for playback. The sound is recorded digitally using a 14 bit linear pulse code modulation encoding system. One of the supreme advantages is that there is no physical contact between the head and the disc during playback and therefore the audio recorded signal can be protected by a layer of material which will prevent damage from dust or scratching.

The signal-to-noise ratio is said to be better than 85 dB (which is really first class), and the response 20 Hz to 20 kHz. Information is recorded at a tangential velocity of 1.5 m/s and a single-sided record of 110 mm diameter will provide a playing time of one hour in stereo. Multiple channel systems can be easily realised with excellent channel separation.

Conclusion

Completely new recording techniques will become available in the reasonably near future which will revolutionise hi-fi systems and provide the highest possible standards of reproduction, although they will be considerably more complex than currently used audio equipment. One wonders if any further improvements will be needed.

CLEAR WINNER!

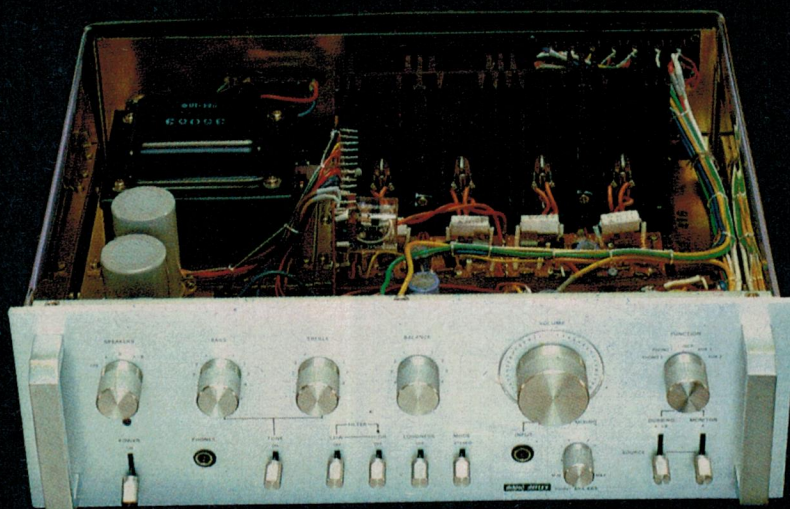

Our remarkable new model ARA665 amplifier is more than just a beautifully functional face

This is a truly exceptional new amplifier for two clear reasons. First, it draws on the international resources of Canada's Audio Reflex company for a design that puts it (in the words of test authority Louis A Challis) "...just a little in front of many of its competitors...".

And second, it sells for a price which, combined with its "plus" features, makes it virtually unchallengable.

With a genuine 2 x 65W power rating into 8 ohms at 0.05% THD (really 70W according to Challis) the ARA665 has such added advantages as mic mixing facility, separate pre/main amp

operation, tone control defeat switch, double phono and double auxiliary, tape dubbing facility and an exceptional 3 year warranty.

"A particularly good unit...silky smooth performance...sensible price" are further quotes from Australia's most authoritative reviewer.

But you are the final critic. So if you're hoping to move into the big league of sound systems but didn't think you could afford an amplifier of big league quality and performance...now you can. See and hear our ARA665 soon!

*Available either with perspex cover as illustrated or conventional metal cover. *Suggested retail \$399.

AUDIO REFLEX

You'll hear more from us

Australian Distributor: Audio Reflex (AUSTRALIA) PTY. LTD.

●SYDNEY

7 Orchard Road, Brookvale 2100
(P.O. Box 208, Brookvale 2100)
Telephone: (02) 938 4188

●N.S.W.

NEWCASTLE (049) 69 2733
WOLLONGONG (042) 29 3762

●INTERSTATE

— MELBOURNE (03) 89 9137
BRISBANE (07) 284 7685
ADELAIDE (08) 264 6984
PERTH (09) 321 6865
LAUNCESTON (003) 31 7188

GEELONG (052) 21 6934

THE AUDIBLE EDGE
SUPERCOMPO



SANSUI ELECTRIC CO., LTD. 14-1 Izumi 2-chome, Suginami-ku, Tokyo 168, Japan
VANFI (AUST.) PTY. LTD. 162, Albert Road, South Melbourne, Victoria 3205, Australia Tel: 699 5473
283 Alfred Street, North Sydney, N.S.W. 2060, Australia Tel: 929 0293

The secret behind **SUPER COMPO** quality is "in-depth matching"!

With **SUPER COMPO**, Sansui the hi-fi specialist now makes its professional expertise available to all music lovers. All seven systems feature "in-depth matching" for exceptional purity of sound. Easy operation also

received high priority. Equally nice, there's just the right quality system for every budget. New **SUPER COMPO** offers the best values in stereo systems of outstanding musicality. Listen and believe!

SUPERCOMPO 100



The most practical receiver system with a low distortion of 0.09% (40W x 2, IHF Music Power). The same cassette deck as used in the most expensive system is included.

SUPERCOMPO 200



This receiver system features higher power (70W x 2, IHF Music Power), Peak Power Level Displays and precision auto-return direct drive turntable.

SUPERCOMPO 300



The top-of-the-line DC-Servo receiver system with reserves of clean power (100W x 2, IHF Music Power), Peak Power Level Displays with 12 x 2 LED indicators, and the best fully automatic DD turntable incorporating D-O-B tonearm and computerized operation.

SUPERCOMPO 400



An excellent choice in a complete system with low distortion integrated amplifier (40W x 2, IHF Music Power), quality FM/AM stereo tuner, precision-made tape deck and precision auto-return turntable.

SUPERCOMPO 500



A fine system which incorporates Sansui's DC-Servo amplifier (70W x 2, IHF Music Power) with Peak Power level Displays and a matching FM/AM tuner with LED signal/tune displays.

SUPERCOMPO 600



The most powerful amplifier (100W x 2, IHF Music Power) and the Digitally Quartz-Locked tuner with a computerized direct-drive turntable and D-O-B tonearm make this system highly desirable to both audio-philosophers and music lovers.

SUPERCOMPO 700



This is the top-of-the-line system — even the internal illuminated cabinet has its own deluxe touches. DC-Servo amplifier (100W x 2, IHF Music Power), Digitally Quartz-Locked tuner and Full-Auto Quartz-Servo DD turntable.

Matching speakers. Wide-range quality speakers systems are available to fully realize the fine features of **SUPER COMPO** systems.

Audio Cabinets. Each **SUPER COMPO** system comes with its own audio cabinet specially designed to accommodate the system's components.

*Also available in silver finish.

Sansui

Only hi-fi, everything hi-fi.

Audio Pro B2-50 sub-woofer system



IT IS REMARKABLE that only a few weeks ago a client building a new and rather expensive house rang to ask where he could buy a subwoofer to cover the frequency range 20 Hz to 50 Hz. He wanted to incorporate it into his high fidelity system to play organ music and faithfully reproduce the original low frequency signals on his tapes. Whilst we discussed with him the merits of various options including 15" (375 mm dia.) and 18" (450 mm dia.) speakers in various enclosures, the most pragmatic solution for his problem had to wait a little longer, until the B2-50 Ace-Bass Subwoofer turned up for review.

The problem

As you undoubtedly know, a very basic problem with most loudspeaker enclosures is that their low frequency response rolls off somewhere between 40 Hz and 150 Hz. The bigger and generally better the enclosure, the more likely its low frequency response extends down to the lowest audible octave, band 1. This octave, centred on 31.5 Hz, extends from approximately 22 Hz to 44 Hz and most domestic speakers do not produce a significant output within the band.

If you know anything about music, you will realise that this octave band is important with many musical instruments — drums, organs, pianos, basses, tubas and double bassoons — and many electronic instruments (including moog synthesisers). The problem is that speaker systems capable of performing adequately in this octave band, generally do so with a pronounced non-linear response, often with significant distortion at high sound pressure levels and generally requiring extremely large vented or ported enclosures.

Thirty years ago I can well recall a Philips advertisement showing a man with his house designed like a large conch shell. He had loudspeakers at the apex so that he could faithfully reproduce the lows as well as the entire audible frequency range. In the August 1973 issue of ETI we described the closest approximation to that house that I have seen, but even there the ability of the system to faithfully reproduce the frequency components in the lowest octave bands were architecturally complex.


In his paper entitled "*Performance Limitations and Synthesis of Direct Radiator Loudspeaker Systems*" (Proc. IREE (Aust) August 1973) Dr Richard Small of the University of Sydney, shows how complex (if not impossible) it is to make a conventional speaker (with reasonable efficiency in a reasonable box volume) produce a flat response in the lowest bass tones. Obviously, a technical breakthrough is required to circumvent the limitations of conventional enclosures.

Neville Thiele presented a basic theoretical analysis as to how this could be achieved in his paper entitled "*Loudspeakers in Vented Boxes*" (Proc. IREE (Aust) August 1961) and showed that by introducing amplifiers and feedback networks, the dynamic performance limitations of the ordinary loudspeaker could be overcome.

Karl Erik Stahl, the designer of the

B2-50, in fact makes use of both Small's and Thiele's work to design a network to circumvent the mechanical problem. The most significant feature of the system is the utilisation of positive feedback around the amplifier and negative feedback around the bandpass filter circuitry, to achieve high outputs and acceptable distortion levels. This is achieved through the strategy of making the electrically synthesised characteristics of the combination of speaker enclosure and driver amplifier, predominate over the real characteristics and mechanical parameters of the two small 160 mm drivers. These operate with controlled motional feedback to perform *Herculean* tasks considering their size.

Stahl overcomes the most significant problem of the driver non-linearity to achieve acceptable distortion levels optimised to cover the lowest three



Louis A Challis and Associates Pty Ltd

Our Ref: E13

MEASURED PERFORMANCE OF

AUDIO PRO B2-50 SUBWOOFER, SERIAL NO. 911893

<u>FREQUENCY RESPONSE:</u>	21Hz to 160Hz $\begin{smallmatrix} +0 \\ -3 \end{smallmatrix}$ dB (set to maximum cutoff frequency)			
<u>CROSSOVER FREQUENCY:</u>	Separately adjustable low pass and high pass filters covering frequency range 40Hz to 200Hz.			
<u>SENSITIVITY:</u> (for 90dB at 2m, 100Hz)	90mV (Preamp input, maximum sensitivity)			
<u>HARMONIC DISTORTION:</u> (for 90dB at 2m)		<u>30Hz</u>	<u>45Hz</u>	<u>100Hz</u>
	2nd	-52.0dB	-48.7dB	-31.1dB
	3rd	-26.3dB	-37.1dB	-42.4dB
	4th	-37.4dB	-51.0dB	-49.8dB
	5th	-29.3dB	-51.0dB	-50.7dB
	THD	6.1%	1.5%	2.9%

(3rd September, 1979)



AGFA-GEVAERT

THERE'S MORE TO AGFA FERRO COLOR THAN MEETS THE EARS.

Agfa Ferro Color Cassettes offer superb reproduction of sound and a convenient colour-coded reference system.


With a choice of three colours and three tape durations – 60, 90 and 120 – you have up to nine combinations for a comprehensive, easy-select library.

Add colour-coding to the many other features and it's easy to choose Agfa Ferro Color Cassettes.

COLOR CODE			
z.B.: e.g.:	FOLK	POP	JAZZ
C60	Yellow	Blue	Red
C90	Yellow	Blue	Red
C120	Yellow	Blue	Red

High Dynamics: Agfa Ferro Color Cassettes have a high quality iron oxide coating to increase dynamic range and frequency responses.

The result is a rich, clear, transparent sound ideal for the recording of all types of music.

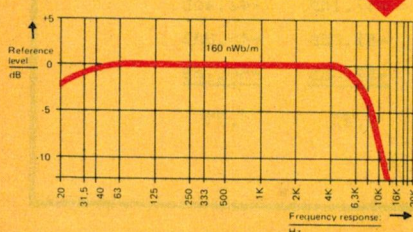

A Better Designed Case:


Cases are of smooth lines, with rounded edges and corners to improve handling and efficiency.

A Better Designed Cassette:

The Cassettes are of the screwed type and side one can be easily identified.

Inside the cassette is a special noise shield to avoid unwanted 'hum'.

To prevent unintentional erasure, knock-out tabs are located in the rear. These are optional either side.

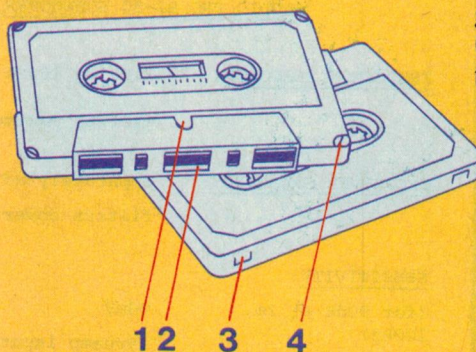

Practical aids in Agfa-Gevaert cassettes:

1. immediate positive identification of side one.
2. metal noise-shield avoids unwanted "hum".
3. knock-out tabs at rear of cassette prevent unintentional erasure (optionally either side).
4. screwed cassettes.



For the convenience of colour-coding and for superb sound reproduction you'll be glad you chose Agfa Ferro Color Cassettes – there's more to them than meets the ears!



*Registered trademark of Agfa Gevaert Antwerp/Leverkusen

Agfa-Gevaert for still cameras, flash-guns, colour film for slides, prints and movies, magnetic tapes.

octave bands of the audible spectrum.

The lower the frequency, the greater these problems become. Stahl has taken special precautions to protect the speaker and amplifier from inputs below 20 Hz by introducing a 12 dB per octave filter to prevent significant cone excursions in that region.

Description

In appearance, the B2-50 Ace-Bass Subwoofer is very different from what you would expect in a speaker designed to operate at such low frequencies. The unit consists of a 25 mm thick fully veneered particle board enclosure, which is very small. The unit that we evaluated is timber veneered but sprayed black to match a European furniture concept that is currently in vogue. The face of the unit is equipped with a removable panel which is a conventional open weave black cloth on a wooden frame. This covers the main power amplifier, input sensitivity controls, power on/off switches, the crossover frequency controls for the subwoofer (30 Hz to 200 Hz) and high pass crossover frequency settings for the main speaker system (40 Hz to 200 Hz).

The response characteristics are plotted on a graph so that the response selected can be assessed in terms of the subwoofer's resulting output. A comparison of our measured data and the manufacturer's data is rather interesting and shows reasonable agreement, except that the attenuation rate at both the lower and upper side bands of the response that we measured in the anechoic room are steeper than those shown by the manufacturer.

At the bottom of the front face of the unit, a voltage selector (for 117, 220, 235 and 250 Volts) is located along with fuses. The speaker connections and preamplifier input/output connections are provided by means of DIN sockets. These are, regrettably, only readily accessible with the unit on its back or upside down. Two small 150 mm drivers arranged in a push/pull configuration are mounted on a 25 mm recessed veneered panel which provides even greater stiffness and damping for the enclosure.

The designers and manufacturers have not skimped in the provision of clamps and brackets for retention of cables or penetrations for cables. The unit gives an immediate impression that the people who designed it have given a


Louis A. Challis
& Associates Pty. Ltd.



FREQUENCY
RESPONSE OF
AUDIO PRO
B2-50 ACE-BASS
SUBWOOFER
LOUDSPEAKER
MEASURED AT
0.75 METRES
FROM BAFFLE
100mm ABOVE
FLOOR

CUTOFF SET TO
40, 70, 200 Hz.

Date: 22/8/79

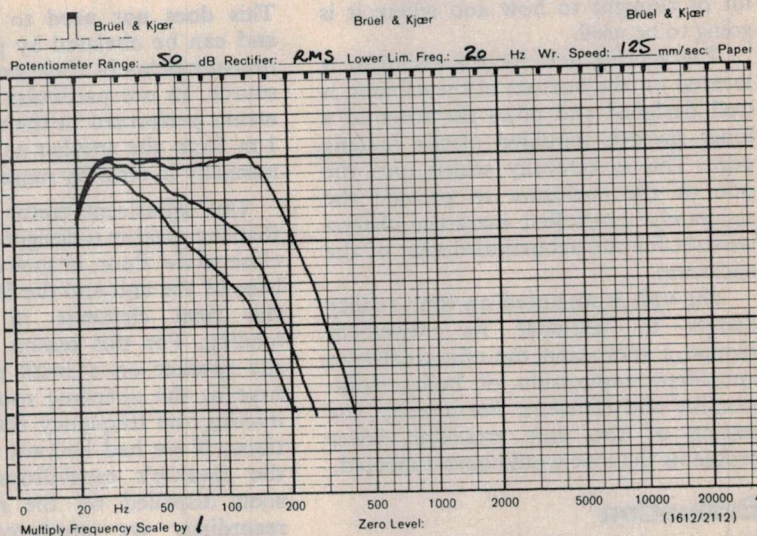


Louis A. Challis
& Associates Pty. Ltd.



PHASE RESPONSE
OF AUDIO PRO
B2-50 ACE-BASS
SUBWOOFER
LOUDSPEAKER
MEASURED
AT 0.75
METRES FROM
BAFFLE
100mm ABOVE
FLOOR

Date: 22/8/79

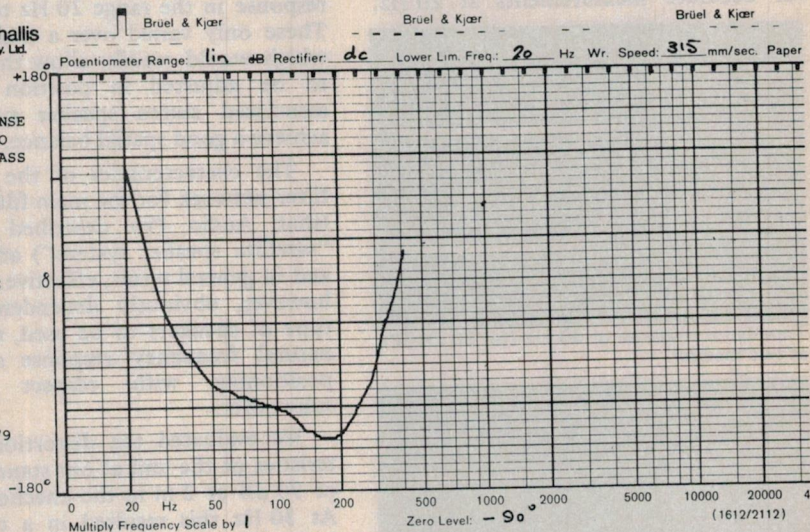


Louis A. Challis
& Associates Pty. Ltd.



AUDIO PRO
B2-50 ACE-BASS
SUBWOOFER
LOUDSPEAKER
SATELLITE
OUTPUT TO
MAIN AMP
SHOWING
RANGE OF
CUTOFF
FREQUENCY
SETTINGS

Date: 22/8/79

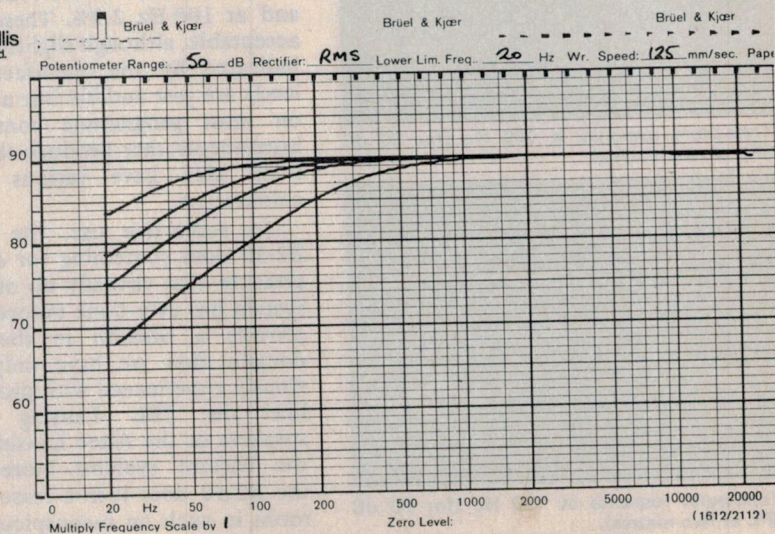


lot of thought to how and where it is going to be used.

The venting port for the enclosure is located on the bottom of the cabinet, is well designed and takes the form of a long, smooth moulded plastic loading port. This is carefully sealed into the side of the enclosure to provide the accurately controlled inertance characteristics for the acoustical design of the enclosure.


The unit is mounted on four quality casters to facilitate its movement around a room and the unit creates an immediate impression of being workmanlike and efficient. Fortunately, the testing of the unit presented fewer problems than we would have expected.

Evaluation


Most anechoic rooms are not designed for accurate measurements at 20 Hz.

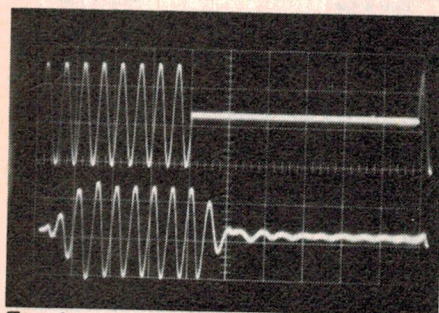

Tone-burst response at 40 Hz (for 90 dB SPL at two metres).

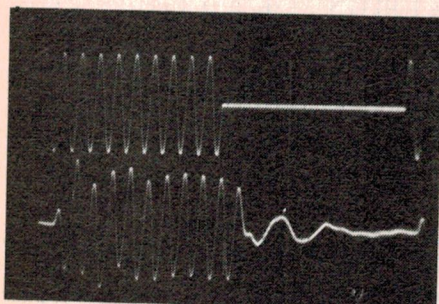

Tone-burst response at 100 Hz (for 90 dB SPL at two metres).

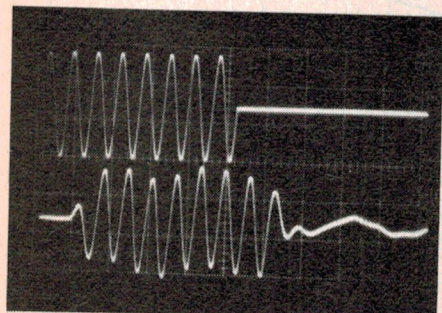

Tone-burst response at 150 Hz (for 90 dB SPL at two metres).

This does not need to be a problem and can be obviated by performing the measurements in close proximity to the source. In our particular case, measurements performed in the range 0.1 m to 1 m from the speaker at 20 Hz are not normally in error by more than 1 dB.

One significant factor of this unit is that the speaker is designed with its port close to the floor, in such a way that the base of the unit and the floor constitute the final elements in the speaker loading. For this reason, we mounted the speaker on a small particle board base in the anechoic room when conducting the frequency response evaluations. If we had had any doubts about the speaker's capabilities, these were soon dispelled by the resulting level recordings we produced. We were equally impressed by the unit's phase response in the range 20 Hz to 200 Hz. These only varied over a modest 250° which would readily allow this speaker to be adjusted in position with its associated stereo speaker systems to achieve a good spatial balance.

The characteristics of the crossover filter network for the main filter system (that Audio Pro described as their "satellite speaker system") are smooth and in general terms, effective. They are however, obviously dependent on the type of speakers to be used, their own natural frequency response and their positioning with respect to the subwoofer.

We evaluated the distortion characteristics of the unit at our standard level of 90 dB at 2 m in the anechoic room. At 30 Hz this resulted in a total harmonic distortion of 6.1%; at 45 Hz 1.5% and at 100 Hz 2.9%. These figures are acceptable, although slightly higher than indicated by the manufacturer. These levels are just audible but not readily so on most programme content as the instruments that produce these sorts of levels also have various degrees of colouration.

In subjective use, the Audio Pro B2-50 does something for our listening pleasure that virtually no other speaker system has ever done before; that is, to provide a breadth in the frequency domain that we have only ever previously experienced with profile systems like the JBL Lansing 'Sovereign' speakers or the Altec Lansing 'Voice of the Theatre' systems. More important, the B2-50 does it in a reasonably sized room in such an inconspicuous way as

to be completely deceptive.

We tried the B2-50 out with a number of different systems (some good and some mediocre) and were immediately impressed by this new presence and extended balance in the overall spectrum. The B2-50 sounded the best on demonstration records produced by other speaker manufacturers. Drums took on a new dimension and organ pieces gained a new realism so that, by closing one's eyes, one could imagine being there at the time of the original recording. Also, records recorded in large auditoria made you think that you were right there.

Summary

The greatest benefit of a subwoofer system of this type is undoubtedly in use with high quality speakers, such as the Quad Electrostatic, which have excellent frequency responses in the 100 Hz to 20 kHz region but ineffectual in the lowest two octave bands. By combining the B2-50 with Quads, the most disturbing limitation in their overall performance is neatly side-stepped and their flexibility for modern, as opposed to classical, music is enhanced. We were frankly at a loss to know what to do with our Quads and this opens the door to a practical and reasonably economical solution for general monitoring purposes.

The Audio-Pro B2-5 Ace-Bass subwoofer, for the first time, offers a practical solution to the problem of accurate reproduction of the lower bass octaves in a way that even those fastidious about their decor will not be able to object on the basis of size, appearance or even performance.

THE AUDIO-PRO ACTIVE B2-50 SUBWOOFER SYSTEM, SERIAL NO. 911893

Dimensions: 540 mm high x 460 mm wide x 450 mm deep

Weight: 28 kg; Price: under \$1000

Manufactured by 3Dgruppen ab, Stockholm, Sweden.

Supplied by Depro Industries Pty Ltd, Suite 5/83 Walker St, North Sydney 2060; (02) 92-6561.

Absolute copyright in this review and accompanying measurements is owned by Electronics Today International. Under no circumstances may any review or part thereof be reprinted or incorporated in any reprint or used in any advertising or promotion without the express written agreement of the Managing Editor.

LISTED BELOW ARE THE
MAJOR HEADPHONES THAT OUTPERFORM

THE MARUNI HV3000R


MARUNI

SUPERLATIVE HEADPHONES AND MICROPHONES

THE **MARUNI** CORPORATION

297 WILLIAMSTOWN ROAD, PORT MELBOURNE, 3207 • TELEPHONE, 645 2079 • TELEX 32571

SONY®

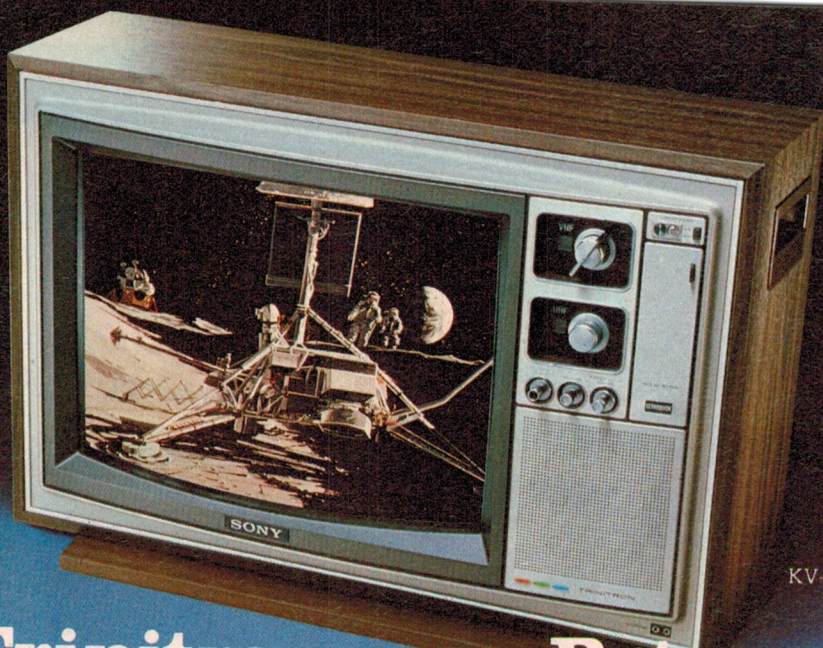

KV-2000AS

**First Trinitron, now Betamax.
Sony gives you one great innovation
after another.**



SL-8000AS

First Sony took state-of-the-art television technology to a new high with the Trinitron color TV.

Now Sony technology takes the enjoyment of viewing television to new heights with the Betamax videorecorder.

Connect Betamax to your TV and you can record anything. You capture the best shows on television and play them back to view again whenever you like. Whenever it best suits your schedule.

But that's only the beginning of what Betamax can do. If two good programmes are on at the same time, on opposite channels, don't flip a coin to decide which to watch. You can watch one while Betamax records the other for you to view later.

Going out for the evening? Set the 3-day automatic timer before you leave and Betamax will automatically record your favourite shows while you're away.

It took twenty years of technological experience to make a videorecorder that will do all this and still be compact enough for the home.

Sony experience also made the difference in the Betamax videocassette. It's easy to store and handle because it's the smallest cassette on the market, yet it holds more than three hours of continuous programming.

And there's the Betamax U-loading system. Experience has proved it to be the most reliable, most stable tape transport system for videorecording. It delivers a picture that is picture perfect.

First Trinitron. Now Betamax. Sony gives you one great innovation after another.

Sony Betamax
See what you've been missing.

TV picture simulated.
AP3256F

Unauthorised recording of recorded works may be contrary to the provisions of the copyright laws.

WE KNOW THAT YOU KNOW
EVERYTHING THERE IS TO KNOW
ABOUT DIRECT DISC RECORDING

SHOW OFF!

And you deserve to be.

A strictly limited number of these
Sheffield Lab Direct Discs are
available from selected retailers
throughout Australia.

**SHEFFIELD LAB 1
LINCOLN MAYORGA &
DISTINGUISHED COLLEAGUES
VOL. 3**

The earliest available Sheffield direct disc album. A medley of instrumentals including America (from West Side Story), You are the Sunshine of My Life, King Porter Stomp, That Certain Feeling. Performed by some of the best studio musicians in the business.

**SHEFFIELD LAB 3
HARRY JAMES, "THE KING JAMES
VERSION"**

Harry James and his Big Band in a repertoire encompassing old and new. Tracks include Cherokee, Sweet Georgia Brown, Don't Be That Way, Lara's Theme.

**SHEFFIELD LAB 4
"BRAHMS, HANDEL, CHOPIN"**
Sheffield's first classical album. Pianist: Lincoln Mayorga. Tracks — Brahms: Variations and Fugue on a Theme by Handel. Handel: Air with Variations from Suite in B flat Major. Chopin: Mazurka in A Minor.

**SHEFFIELD LAB 5
DAVE GRUSIN, "DISCOVERED
AGAIN"**
Light, vibrant jazz with Dave on piano; Ron Carter, Bass; Harvey Mason, Drums; Larry Bunker, Percussion. Tracks include compositions by Dave, Thad Jones and Antonio Carlos Jobim.

**SHEFFIELD LAB 6
HARRY JAMES, "COMIN' FROM A
GOOD PLACE"**

Harry James and his Big Band in an easy-going jazz oriented mood. Tracks include the Footstomper, Two O'Clock Jump, Opus Number One, Tuxedo Junction.

**SHEFFIELD LAB 7
ERICH LEINSDORF AND THE LOS
ANGELES PHILHARMONIC
"WAGNER"**

Recorded July, 1977. Includes Die Walkure, Ride of The Valkyries; Tristan and Isolde, Prelude to Act 1; Die Gotterdammerung, Siegfried's Funeral Music.

**SHEFFIELD LAB 8
ERICH LEINSDORF AND THE LOS
ANGELES PHILHARMONIC "ROMEO
AND JULIET"**

This record includes Act 1 Introduction, Masques, Gavotte, Act 2 Finale, Juliet's Funeral, Juliet's Death.

**SHEFFIELD LAB 9
LARRY McNEELY AND FRIENDS
"CONFEDERATION"**

Real blue grass country recorded the inimitable Sheffield way. Listen to "Slow Train" on side 2 and hear Gary Walters play his string bass solo.

**SHEFFIELD LAB 10
"MICHAEL NEWMAN CLASSICAL
GUITAR"**

For the serious audiophile and guitar lover hear Michael Newman play guitar in the direct cut mode.

Please rush me the latest Sheffield Lab Direct Cut Disc. I enclose my cheque/money order for \$23.99 to cover record number Lab 10 (Sheffield)
"MICHAEL NEWMAN CLASSICAL GUITAR".

I would also like a list of Sheffield Lab Direct Disc stockists.

After all YOU know

- that the artists worked their poor little . . . 's off doing take after take to wrap up that perfect performance just for you
- that the sound editor didn't have a job (couldn't have that masterpiece "muddled up" in the 24 track grinder) — instead each record is pressed from a directly cut master lacquer to preserve that astounding range and breathtaking instrumental impact
- that direct cut discs soon become collectors' items as they are truly limited editions
- that there's no recording that can come as close to the real thing as DIRECT DISC recording, and
- that the big name in DIRECT DISCS is SHEFFIELD

So you know all there is to know and we won't let on about your little secret — that you haven't got a direct cut disc in your collection — but what if someone else finds out?

So keep off the conversation for a short while till we can rush you your first Direct Disc — that way you can hold it up while you're holding forth!

Name
ADDRESS
POSTCODE

Send to:
**ACOUSTIC MONITOR COMPANY PTY LTD
PO BOX 204 ENFIELD NSW 2136**

Audio Reflex ARA665 stereo amplifier

Released in July, this amplifier "... offers excellent performance at a reasonable price".

THE ARA-665 Stereo Amplifier is a conventional medium powered integrated stereo amplifier well presented in a ventilated steel cabinet. The front panel is solid and the brushed aluminium escutcheon is flanked at both ends by two, large well-made diecast handles.

Some features would lead one to believe that the unit is constructed for rack mounting but it is 80 mm too short for that purpose. The handles have another function, however, as they provide a degree of protection for the controls not only in transit, but also when mounted on a shelf.

The controls are conventional. The primary controls are located on the upper row, whilst the secondary controls are located on the lower row. The unit features speaker "off"; A + B connections; bass and treble controls; a balance control; and a very sensible mechanically-indented volume control which is rear-illuminated when the unit is switched "on". The phono control provides selection for two phono inputs; two auxiliary inputs as well as tuner;

and the tape dubbing control switches for tape recorder A to B and tape recorder B to A, Monitor A and Monitor B, and are both sensible and practical.

Features

The unit incorporates low pass and high pass filters, loudness control and a front-mounted single microphone mixing socket and separate volume control.

The front panel features are sufficiently comprehensive to satisfy all normal requirements. The rear of the cabinet features an array of coaxial sockets with preamplifier out and main amplifier in, which are mechanically linked, instead of the more conventional switch-linking. It also incorporates conventional tape sockets for the Tape Recorder A and Tape Recorder B and a DIN socket for connection to Tape Recorder A.


The speakers are sensibly connected by well designed spring loaded terminals to accept cables up to 3 mm diameter. The power fuse is located on the rear panel and in keeping with the latest

trend the unit does not provide auxiliary two-pin ac outputs of the type which are no longer permitted by the Australian Electrical Industries Authority.


The unit is well constructed, the chassis and cabinet being quite well made. The layout of the circuitry on the four internal printed circuit boards makes maximum use of the ventilation slots at the rear of the amplifier. These are disposed under and over the large heat sinks needed to dissipate the 70 W continuous rating with both channels driven.

The printed circuits feature conventional electronic components, are well labelled and are easily accessible for service. But, we did not like the use of internal fuses on the rectifier board. These are inaccessible unless the cover of the amplifier is removed. We consider that fuses are user serviceable and should be accessible.


The amplifier packs a lot of componentry into a reasonably small space and does so without prejudicing accessibility for servicing or its ventilation.

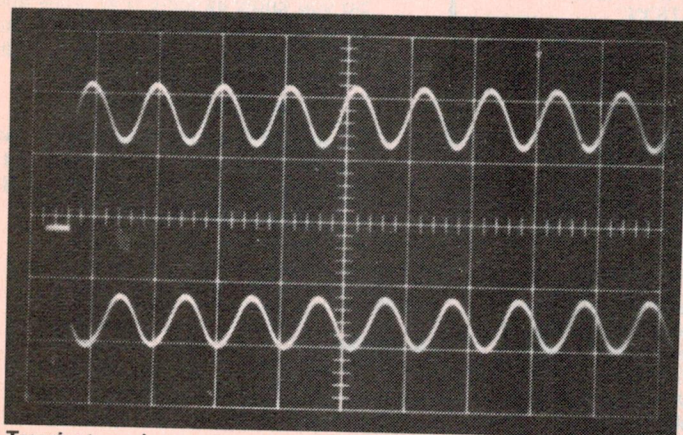

Transient overload recovery test. Upper trace, input - lower trace, output. (1 ms/div.).

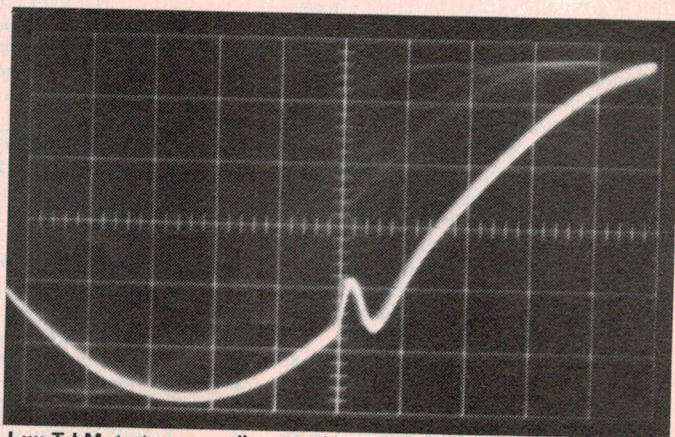

Lux T.I.M. test - an excellent result.

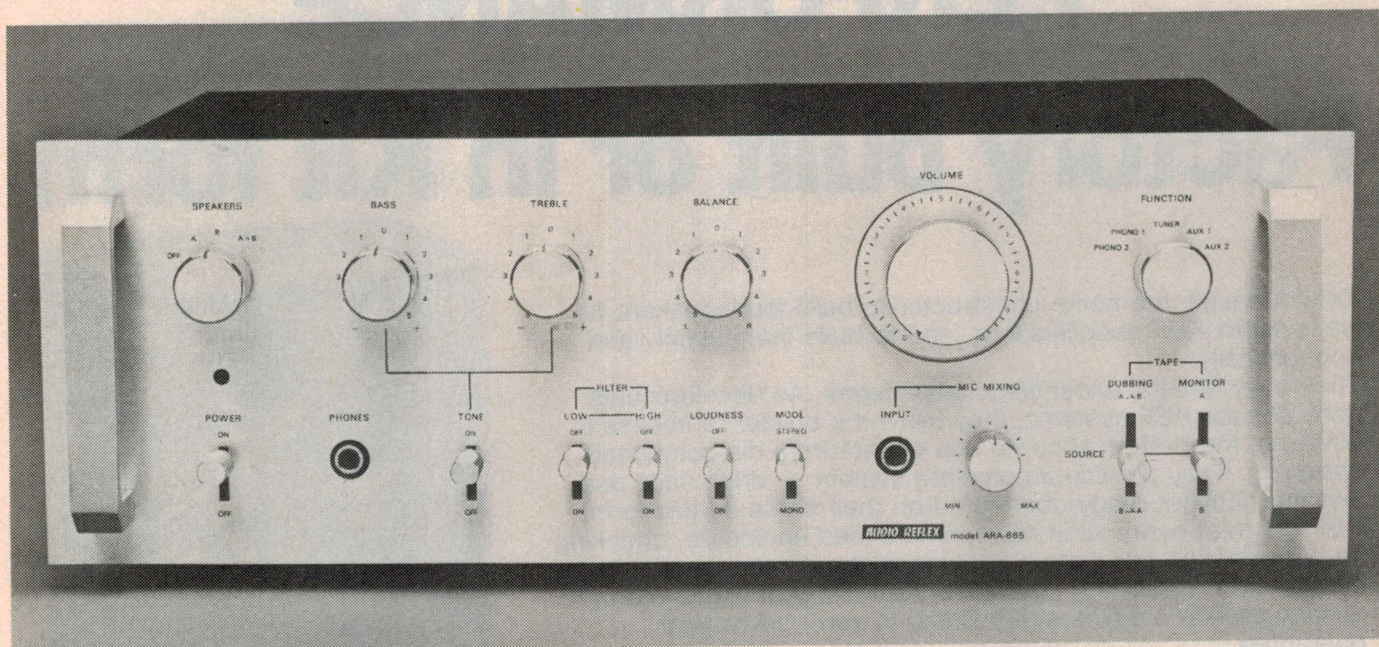

Evaluation

From our previous experience with the unit, we expected it to perform well but were still surprised at some of the results.

With the tone controls in their centrally indented position and with the tone defeat switch inoperative, the frequency response was from 11.5 Hz to 49.5 kHz.

The sensitivities for 1 W into 8 ohms are all normal and the phono sensitivity of 375 mV is particularly good. This would allow almost any conventional magnetic cartridge to be used with this unit. The phono margin of 250 mV which is 36 dB (re 70 W sensitivity) is excellent and would prevent the unit from saturating in the

early stages during overload.

The harmonic performance of the unit at 70 W level into 8 ohms was excellent, being below 0.015% with both channels driven at 1 kHz. Surprisingly, the distortion at 1 W did not vary significantly from the distortion at the 70 W level. Our LUX transient intermodulation distortion analyser showed that the TID performance was excellent.

The hum and noise level (re 1 W) for both the auxiliary and phono inputs are excellent being -77.5 dB (A) on the phono input and -78 dB (A) on the auxiliary input. The maximum power output of the amplifier (according to

the IHF A202 test) provides an 81 W peak level and a dynamic head room of 8 dB (re 70 W) rating. The crosstalk between channels is also excellent, being -55 dB at 100 Hz and significantly better at all other frequencies.

Apart from the discrepancy between the tone defeat switch on/off, we were unable to find any anomalous or untoward behaviour in the amplifier. In all tests it either equals or exceeds all of the manufacturer's specifications. In fact, many of the manufacturer's specification figures were exceeded by this unit.

The amplifier's performance from an instrumental and objective standpoint ►


Louis A. Challis
& Associates Pty Ltd

AUDIO REFLEX
ARA-665 STEREO
AMPLIFIER

LOUDNESS
CONTROL

TONE CONTROLS
"OFF"

Date: 10/8/1979

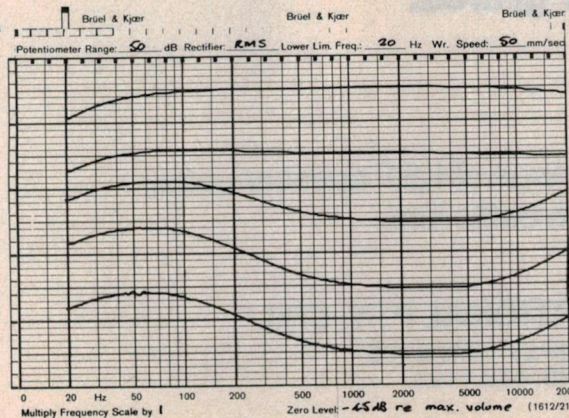

Louis A. Challis
& Associates Pty Ltd


AUDIO REFLEX
ARA-665
AMPLIFIER

HUM & NOISE
ONE THIRD OCTAVE
ANALYSIS

PHONO INPUT
(SHORT CIRCUITED)

VOLUME CONTROL
SET SUCH THAT
5mV INPUT
GIVES 1W OUTPUT
IN 8Ω

Date: 10/8/1979

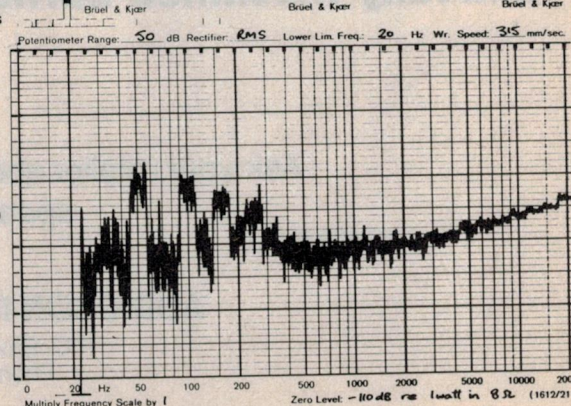

PROVEN KEF SPEAKER PERFORMANCE

Factory built or in Kit form

Kefkits enable the home constructor to build loudspeakers to well proven KEF specifications, and to build them simply and economically.

They offer several exceptional advantages. As developments from popular KEF systems, they allow the builder to assess in advance, the performance he can expect from his completed speakers. They provide a complete system — drive units and dividing network ready connected on their baffle. In this form, KEF can test every kit in its recommended enclosure, checking its performance and consistency against a laboratory-maintained system before allowing it to leave the factory. It is this extra assurance that enables every Kefkit to carry a five-year guarantee.

When the builder assembles his Kefkit, he knows with confidence that every vital component has been produced in KEF factories, under stringent quality control. In particular, the all-important drive units are exclusively KEF made, to the design and production standards that have made them a world choice. To achieve a higher level of natural, uncoloured sound reproduction, KEF have rejected conventional paper diaphragms in favour of newer materials. These advanced diaphragms in moulded plastics or metal and plastics combinations, avoid the unwanted resonances that lead to colouration in ordinary drive units.

Behind every Kefkit, is a team of speaker engineers with an international reputation for their uncompromising standards in sound reproduction.

Now, with Kefkits, that KEF quality comes surely and easily within reach of every serious lover of high fidelity sound.

The new Kef Concerto Kit makes it easier. These kits include grille cloth and fully machined baffles and grilles.



KEF
CONCERTO

Superb floor-standing speaker will realise the full potential of the largest domestic hi-fi installations. Buy it factory built or build it yourself with Kefkits.

Ask your retailer about the range of KEF speaker units,
speaker kits & baffle kits.

or write to:

AUDIOSON INTERNATIONAL PTY. LTD.

P.O. Box 361, Brookvale, NSW 2100
Phone: 938 1186, 938 1195.



Record Ecology in DiscKit form — you'll Save more than money

DiscKit is a crafted walnut tray and dustcover that saves you 20% with the Discwasher products in the kit. (\$55 versus \$69 separately) DiscKit includes: 1) The Discwasher System Record Cleaner with D3 Fluid, 2) the Zerostat anti-static pistol and test light, and 3) the SC-1 Stylus Cleaner.

Sole Australian Agents

arena
DISTRIBUTORS

Australasia Pty. Ltd.

Telex: 93299 Phone: (09) 361 5422

But you'll save more than money. You'll save your records from imbedded micro-dust, your cartridge stylus from abrasion and your ears from a lot of static.

It's your choice, disposable records or Discwasher. (Walnut tray and dust cover are available separately as the Discorganizer, \$15)

Cartridge and Disc Traker (pictured) not included in Kit, ask your nearest dealer for details.

**Now includes free,
DC1 pad maintenance brush.**

@ DISCWASHER®, INC.

Louis A. Challis
& Associates Pty Ltd

Briel & Kjaer

Briel & Kjaer

Briel & Kjaer

Louis A. Challis
& Associates Pty Ltd

Briel & Kjaer


Briel & Kjaer

Briel & Kjaer

AUDIO REFLEX
ARA-665 STEREO
AMPLIFIER

MAXIMUM AND
MINIMUM
SETTINGS OF
TONE CONTROLS


Date: 10/8/1979

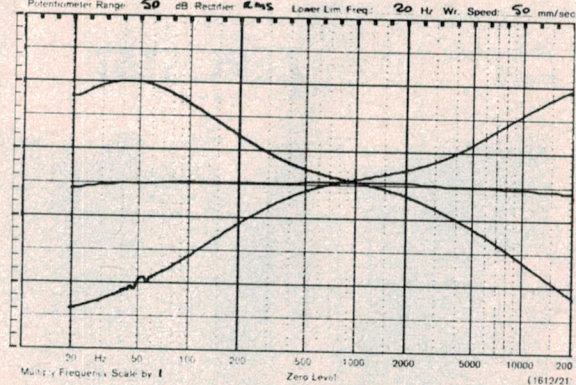

AUDIO REFLEX
ARA-665 STEREO
AMPLIFIER

FILTER
CONTROLS
TONE CONTROLS
"OFF"

Date: 10/8/1979

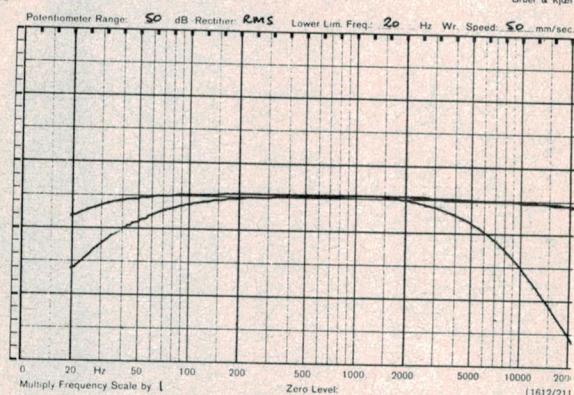

was excellent. We already knew that it produces a low total harmonic distortion and that the transient intermodulation distortion figures were excellent. It only remained to see how well it performed on real programme content. We played a series of new direct recorded test records from Sheffield Laboratories, selected material from the International Electro-Technical Commission and test records produced by speaker manufacturers, to evaluate the unit. The evaluation was carried out with Quad electrostatic speakers and Pioneer electrostatic headphones.

The unit adds negligible colouration to the original signals. It provided extremely pleasant and easy listening on all of the content which we evaluated.

We particularly liked the tape dubbing feature. This allowed easy transfer of reel to reel data onto cassette and simultaneous monitoring without any complications.

Our impression of the ARA-665 is that this amplifier offers excellent performance at a reasonable price and would be a reliable basis for a home high fidelity system.

AUDIO REFLEX ARA-665 STEREO AMPLIFIER — S.N. 901165A

Dimensions: 440 mm wide x 132 mm high x 290 mm deep

Weight: 12.3 kg; Price: \$399

Manufactured in Korea for Audio Reflex Australia, 7 Orchard Rd, Brookvale, 2100 NSW (02) 938-4188.

The Absolute copyright in this review and accompanying measurements is owned by Electronics Today International. Under no circumstances may any review or part thereof be reprinted or incorporated in any reprint or used in any advertising or promotion without the express written agreement of the Managing Editor.



MEASURED PERFORMANCE OF AUDIO REFLEX ARA-665 STEREO AMPLIFIER S.N. 901165A

Louis A. Challis and Associates Pty Ltd

FREQUENCY RESPONSE:

(-3dB re 1 watt)

Tone Controls Centred: 11.5Hz to 49.5kHz

Tone Controls "Off" : 22.5Hz to 57.5kHz

SENSITIVITY:

(for 1 Watt in 8Ω)

AUX/TUNER/TAPE: 23.7mV

PHONO: 375μV

MIC: 810μV

INPUT IMPEDANCE:

AUX/TUNER/TAPE: 24kΩ

PHONO: 45kΩ

MIC: 61kΩ

OVERLOAD MARGIN:

PHONO: 215mV (i.e. 36dB re 70 Watt sensitivity)

OUTPUT IMPEDANCE:

0.33Ω

TOTAL HARMONIC DISTORTION:

(at rated power -70 watt in 8Ω)

	100Hz	1kHz	6.3kHz
2	-86.1dB	-78.9dB	-82.6dB
3	-81.7dB	-81.1dB	-78.3dB
4	-95.6dB	-98.0dB	-94.9dB
5	-92.6dB	-93.4dB	-
THD	0.010%	0.015%	0.014%

TOTAL HARMONIC DISTORTION:

(at 1 watt in 8Ω)

	100Hz	1kHz	6.3kHz
2	-81.9dB	-80.5dB	-77.8dB
3	-84.6dB	-85.4dB	-83.6dB
4	-94.8dB	-94.0dB	-85.5dB
5	<-101.0dB	<-99.0dB	-
THD	0.010%	0.011%	0.015%

TRANSIENT INTERMODULATION DISTORTION:

(see attached photograph)

NOISE AND HUM LEVELS:

(re 1 watt in 8Ω)

volume control set for 1 Watt output with 0.5V input (AUX) and 5mV input (PHONO) - input short circuited.

AUX :	-72dB (Lin)	-78dB (A)
PHONO:	-72dB (Lin)	-77.5dB (A)

MAXIMUM OUTPUT POWER AT CLIPPING POINT:

1HF-A-202

72V p-p in 8Ω

20ms burst repeated at 500ms intervals

= 81 watts

Dynamic Headroom = 8dB (re 70 watts)

CROSSTALK:

re 2.828V rms pink noise in each 1/3 octave in other channel

	100Hz	1kHz	6.3kHz
	-55dB	-64dB	-55.5dB

A trio for your living room

Professional musicians play the best musical instruments they can afford. And there is now no reason why you shouldn't play their works with the best hi-fi you can afford. Like the moderately priced Kenwood KA-405 integrated amplifier.

It's a virtuoso performance in audio engineering all by itself. One proof: phono S/N ratio 77dB at 2.5mV input. Our KT-413 auto-sequential tuner is not simply

the last word in convenience. It is accurate where accuracy counts most: in tuning FM stations. And the KX-550 is equipped with two-belt drive, Dolby* noise reduction and separate bias and equalization. So you can make and play tapes that even a seasoned pro will admire. The Kenwood trio of hi-fi components. Bringing professional performance to your living room.

*Trademark of Dolby Laboratories.

THE AUDIBLE DIFFERENCE



 **KENWOOD**

For information, please write to: AH-SECTION,
TRIO-KENWOOD CORPORATION 6-17, 3-chome, Aobadai, Meguro-ku, Tokyo, Japan.
TRIO-KENWOOD (AUSTRALIA) PTY. LTD. 30 Whiting St., Artarmon, N.S.W. 2064, Australia Tel: 439-4322

ARLEC



NEW

LOW PROFILE TRANSFORMERS

with 40% Extra Power

AL 7VA/6	6V C.T. or 3V
AL 7VA/9	9V C.T. or 4.5V
AL 7VA/12	12V C.T. or 6V
AL 7VA/15	15V C.T. or 7.5V
AL 7VA/18	18V C.T. or 9V
AL 7VA/24	24V C.T. or 12V
AL 7VA/30	30V C.T. or 15V

All Models Rated At 7 VA.

Features:

- Insulated to AS C126
- PCB Mounting Pins
- Pin Compatible with other Current Models
- Mounting Clamps available for non PCB applications
- Modern Welded Stack
- Fully enclosed windings
- S.F.C. Approved
- Size L.49mm, W.35mm, H.34mm.
- Weight 0.23 Kg

Also available in 10VA with similar dimensions for O.E.M. Quantities.

ARLEC

A+R Electronics Pty Ltd

A MEMBER OF
THE A+R-SOANAR
ELECTRONICS
GROUP

30-32 Lexton Road, Box Hill, Vic., 3128, Australia. Telex: 32286.

VICTORIA: 89 0661

N.S.W.: 789 6733

Sth. AUST: 51 6981

QUEENSLAND: 52 5421

WEST AUST: 381 9522

HONG KONG: (3) 89 1271

Ultrasound top shelf tapes . .



They are not
cheap tapes, but no good tape is.

We believe this is the best audio cassette offer
available. Top quality tapes at bargain prices.
(Limited offer).

C.90 LN Top Shelf normally U.S. \$3.95.
Our starting price \$1.15 ea. in boxes of 10.

ULTRASOUND LOW NOISE C90

Cross-hatch housing steel pin
quality tape.

Box of 10 \$11.50

which means \$1.15 ea.

Box of 50 \$51.75

which means \$1.04 ea.

ULTRASOUND

CHROMIUM DIOXIDE C90

High output — low noise.

Box of 10 \$23.00

which means \$2.30 ea.

Box of 50 \$109.25

which means \$2.19 ea.

Tapes in stock at going to press. (add \$2 to each order for postage). Larger quantities-special
prices. Send pre-paid envelope.

● Organisations able to purchase at sales-tax-free prices should enclose a valid sales tax
certificate and deduct 15 percent.

● Trade outlets wanted in all States.

To: XENON WORLD IMPORTS, Box 33, Warradale, SA. 5047.

Please send me.....

Add \$2.00 for postage. Totalling \$.....



Name.....


Address.....

..... P/Code

Bankcard No

Signature

6 years of reliable mail order service.

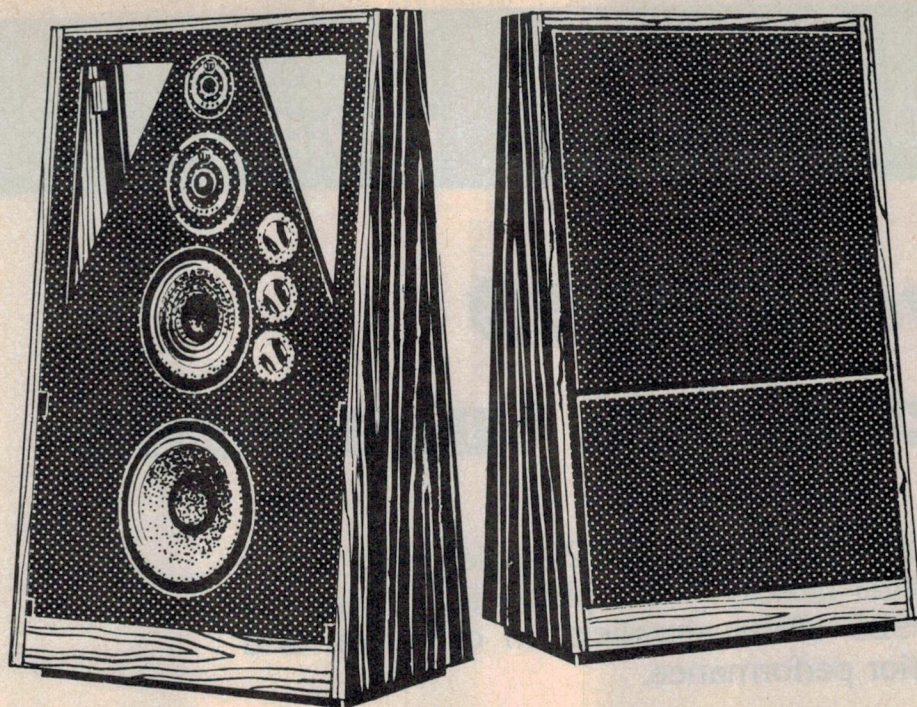

New shape of sound from RTR: The trapezoidal 800D 4-way system.

RTR has applied its most advanced technology to the development and integration of transducers, crossover and enclosure to achieve virtually the ultimate in a single system. The RTR 800D soft dome speaker.

Its flawless, faithful reproduction more closely resembles the original musical source than you thought possible. Instruments sound exactly as they do in life; performance realism is retained while maintaining linearity, focus, imaging, subtlety and sense of depth perspective.

An incredible performance you must hear to appreciate.

The 800D 4-way system

1 A 10" woofer specifically designed for accurate low bass response, from 30Hz to a cut-off at only 190Hz. With 1½" high-temperature voice coil assembly and 4 lb. magnet structure, it employs special fibre cone and foam surround impregnated with damping and sealing fluid for better air seal, greater resistance to break-up and optimum energy absorption.

2 The 8" upper bass/lower mid driver is of similar construction, and covers the range from 190 to 1900Hz.

3 The 1½" soft dome midrange radiator employs a unique carbon-fluid damping and sealing compound applied to the dome for greater longitudinal and torsional rigidity for true piston action and high power operation.

Covers the range from 1900 to 9500Hz.

4 The new 1" soft dome tweeter for performance from 9500Hz to well beyond audibility at 25,000Hz perfectly complements the midrange.

Significant achievements

The high efficiency and ruggedness of the 800D permits it to be driven by 25 watts, yet it takes 125 watts with ease. Lightning fast transient response combines with wide dynamic range to respond to sudden changes in programme level without clipping or distortion. Bass is smooth, tight and accurate without muddy or boxy sound. A new, sophisticated crossover has virtually no transient or IM distortion, with driver parameters precisely determined. Level control on 8" upper bass/lower midrange permits compensating from room response.

Hear the RTR 800D difference at your specialist dealer, or write for specifications.

Distributed in Australia by Acoustic Monitor Co Pty Ltd (Member of the Thomas & Coffey Group) 12-18 Gould Street, Enfield, NSW 2136. Phone: (02) 642-7888. Telex: 26778. Cables: "Tomcoffy" Sydney.



**Listen...
you'll be hearing
more from RTR.**

SMA/AMZ

Sanyo TP929

direct-drive turntable

This turntable features an unusual 120-pole 'linear' motor to drive the platter directly — the platter itself being the rotor. The TP929 offers simplicity in operation and generally superior performance.

IN A BURGEONING FIELD of direct-drive turntables it seems that there are many ways of achieving "direct-drive". Obviously, the type of motor, its speed stability, torque and freedom from pulsations are important factors.

The TP929 is one of the newest units from Sanyo, who offer a number of different direct-drive turntables. The most significant difference between this and their other units is undoubtedly the use of a 120-pole linear motor.

The TP929 is an attractive unit. In keeping with most of the other available Sanyo models, it features a high quality plastic injection-moulded plinth; an excellent clear plastic detachable dust cover with spring loaded hinges; and the minimum number of operational controls.

Controls

These controls are nearly all located on a raised metallic type escutcheon near the front edge of the plinth. These consist of a speed selector push button for either 33 RPM or 45 RPM, a large reject button at the extreme right hand end and two vernier speed controls for 33 RPM and 45 RPM at the extreme left hand end, adjacent to the strobe light which projects onto indentations cast into the side of the turntable.

The normal pre-set controls consisting of the anti-skating adjustment and the tracking weight adjustment are on or next to the conventional S-shaped tone arm. This is fabricated from aluminium alloy. The tracking weight balance adjustment is a well-machined



threaded element for which the tracking weight indication is a small engraved plastic insert on its leading edge. This is adjusted to read zero grams at the balance position and follows the threaded adjustment in an anti-clockwise movement to indicate the tracking weight (selected in the range zero to 3 grams). The gimbal is unusual, it has long, cantilevered dual bearings and an open yoke structure which is striking in appearance. Whilst seemingly fairly rugged, the length of the gimbal bearings would subject them to a larger dynamic stress than normal and could put them at risk from inadvertent abuse or unusual dynamic loading, especially during transportation.

Notwithstanding our concern, they performed beautifully in the unit being evaluated and showed absolutely no signs of weakness. The anti-skating adjustment works well although, as subsequent testing showed, the adjustment did not agree completely with the optimum setting called for by testing. The viscous-damped cueing lever is particularly well designed and performs extremely well, whilst the locking control for the tone arm is neat and functional. Below the tone arm, on the plinth, the designers have placed a stylus guide for correctly setting the stylus position. Whilst this is a good idea the low fixed height of this guide detracts a little from its functional concept.

One feature we particularly like is the label stuck onto the plinth, immediately below the head shell, to indicate the stylus replacement — type ST-500 — for the cartridge actually fitted, so that in the event of replacement being required you would know which stylus to fit.

The motor

We were intrigued by the concept of a 120-pole motor and initially thought that this must be an expensive wound-motor configuration. Sanyo's concept is in fact a result of re-examining the basic attributes of direct-drive turntable motors. The 120 poles in this case are achieved through the use of a permanent magnet ferrite strip in which the 120 poles are moulded. This is fixed to the underside of a metal ring on the turntable so that the turntable itself becomes the rotor, whilst three drive coils (A, B & C) and a sensor located in a

quadrant under the turntable, become the stator. In real terms, nothing could be simpler and almost nothing approaching this refinement could be cheaper.

Because of the diameter of the ring (106 mm) the driving torque is fairly high. By driving the three coils from a 3-phase circuit, smooth driving torque is assured. The normal fluctuations that occur in dc or other forms of ac motors are virtually eliminated. Because of the number of rotor magnet poles, the frequency of the electromotive voltage induced in the stator winding, is 33.3 Hz at 33-1/3 RPM and 45 Hz at

45 RPM. These frequencies are used to drive the servo feedback control system which allows the designers to achieve a very low frequency drift. The stator construction is interesting as it consists of the three driving coils (each driven from a different phase) and a sensor which detects both the position of the rotor magnets and the phase of current passing through the drive coils.

The stator is made of three saturable magnetic cores as well as a bias magnet, which applies a 140 gauss magnetic bias field to each of the cores. These coils are aligned at a 2° pitch to one another



Louis A Challis and Associates Pty Ltd

MEASURED PERFORMANCE OF

SANYO TP929 LINEAR MOTOR DIRECT DRIVE TURNTABLE

S.N. 98100851

<u>RANGE OF SPEED ADJUSTMENT:</u>	33 1/3 RPM: (+ 0.3% - 0.4%)
	45 RPM: (+ 0.3% - 0.4%)
<u>WOW AND FLUTTER:</u>	Wow 0.2% peak to peak
	Flutter 0.03% weighted RMS 0.065% unweighted RMS
<u>RUMBLE:</u>	-29.8dB unweighted
(re 2.24cm/sec)	-55.8dB weighted (BS4852)
<u>FREQUENCY RESPONSE:</u>	20Hz to 16.5kHz ±1.5dB
<u>SENSITIVITY:</u>	<u>Left</u> <u>Right</u>
(at 1kHz)	1.19mV/cm/sec 1.22mV/cm/sec
	Channel Difference: 0.2dB
<u>CROSSTALK:</u>	<u>100Hz</u> <u>1kHz</u> <u>6.3kHz</u>
	Left to right -27dB -28dB -27dB
	Right to left -21dB -21dB -23dB
<u>TONE ARM RESONANCE:</u>	6.4Hz (see attached graph)
<u>TOTAL HARMONIC DISTORTION:</u>	<u>100Hz</u> <u>1kHz</u> <u>6.3kHz</u>
(2.24cm/sec at 1kHz)	Left 1.6% 1.2% 11.6%
	Right 1.6% 2.3% 13.0%
<u>SENSITIVITY TO EXTERNAL VIBRATION:</u>	
	Main resonances at 20, 32, 52, 86Hz

31st August, 1979

THE AUDIBLE EDGE
SUPERCOMPO



More unusual facts audiophiles will want to know about Sansui's new systems.

Sansui's new SUPER COMPO units are a bit different than your conventional systems. Particularly noteworthy is the fact that all SUPER COMPO units are designed from the very beginning for in-depth matching.

In-depth matching means more than simply adjusting quantitative aspects such as signal levels but meticulous matching of qualitative aspects including the dynamic response characteristics of every single element in the system.

Matching qualitative as well as quantitative factors is possible because Sansui has decades of experience as a hi-fi specialist. Application of advanced technology is constantly monitored by the feedback of tested musical human judgment.

The proof is in the hearing, and the superior sound quality of SUPER COMPO receivers, for example, clearly rivals that of separates. How this is achieved will become more evident by a close look at the R-70 FM/AM receiver.

New DC-Servo Amplification

The advanced DC-Servo configuration has important audible benefits. Not only is THD low (0.08% at full rated output of 65 RMS

DC SERVO watts x 2) but TIM (transient intermodulation distortion) is also low. Low TIM means even complex pulsive signals are reproduced in all their original purity.

Rapid-responding rows of LEDs let you know how much power is being fed to your speakers and

provide an accurate way to measure music source signals.



An output as low as

0.008 watts can be seen!

New electronic tuning indicators

Instead of mechanical needle tuning indication, electronic LEDs show signal strength and station center. Five LEDs


show signal strength and a unique arrow-head-dot-arrowhead display instantly lets



you know when you are tuned for the best possible reception. And reception is quite clear thanks to the MOS FET frontend, ceramic filters, PLL, and new quadrature detector.

Versatile audio refinements

Conveniences include speaker system selector for two sets of speakers, inter-tape dubbing and source monitor, one-touch-lock speaker connections and antenna terminals, high filter, loudness and FM mute switches.





The facts show there can be no doubt about it. With a fine choice from the wide range of SUPER COMPO systems — to meet every requirement and every-one's budget — SUPER COMPO gives you the audible edge.

Sansui


Only hi-fi, everything hi-fi.

SANSUI ELECTRIC CO., LTD. 14-1 Izumi 2-chome, Suginami-ku. Tokyo 168, Japan
VANFI (AUST.) PTY. LTD. 162, Albert Road, South Melbourne, Victoria 3205, Australia Tel: 699 5473
 283 Alfred Street, North Sydney, N.S.W. 2060, Australia Tel: 929 0293

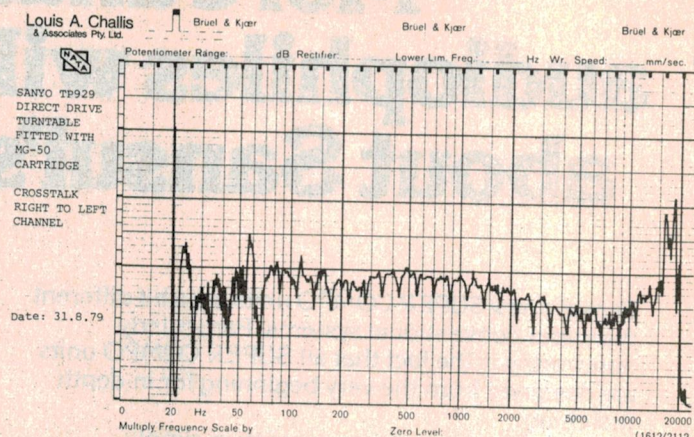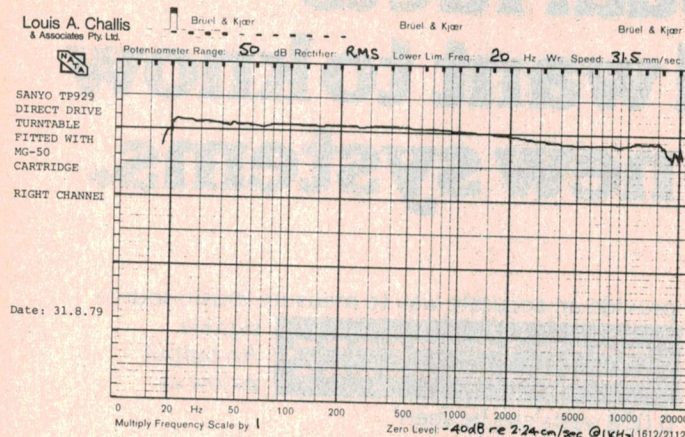

and are thus electrically positioned for 120° phase difference. They are spaced from the rotor magnets by a 3 mm air gap. The driving coils drive two rows of four triangular poles at the top and bottom of each coil, and thus 25 poles drive the rotor. The feedback circuit employs operational amplifier integrated circuits to amplify the signals, detect the actual turntable speed (according to the frequency of the voltage in the sensor) and thereby maintain the speed of the turntable at a stable and constant value. The net result is an unusually simple form of construction with superb electrical characteristics.

In playing the unit, the tone arm is intended to be manually placed onto the record with or without the use of the cueing lever. Tone arm return is fully automatic or can be activated at any point during the playing cycle by pressing the reject button.

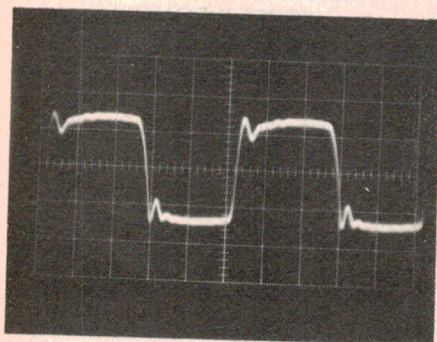

Square wave response at 7 cm/sec. equivalent RMS velocity.

On test

The objective testing of the unit immediately highlighted the differences between this and the Sanyo Model TP1030 direct-drive turntable which we evaluated two months ago. Whilst the

wow was virtually the same at 0.2% peak-to-peak, the flutter was significantly lower at 0.3% (weighted RMS) and the unweighted flutter significantly lower at 0.065%. The unweighted rumble was significantly lower at -29.8 dB (re 2.24 cm/sec) whilst the weighted rumble was more than 25 dB lower at -55.8 dB (BS4852). The tone arm resonance frequency was lower at 6.4 Hz with a characteristic which was slightly smoother than that provided by the TP1030.

The main difference in the plinth was the level of its vertical vibration isolation. This exhibited a smaller number of resonances which were also less pronounced and generally of lower level. The degree of vibration isolation of the plinth still falls short of our expectations for a top-line turntable. Such vibration is dependent on the type of shelf or furniture on which the unit is mounted and the structure of the building or room in which it is located.

The MG50 cartridge, which comes as a standard fitting on the unit, is interesting. Firstly, it has a frequency response which is remarkably smooth from 20 Hz to 17 kHz. The indicated droop and subsequent rise at 18 kHz is a function of the test record and not of the cartridge. Although the response is not absolutely flat it is as flat as any purist would reasonably desire. The channel separation of this cartridge is excellent and the harmonic distortion characteristics at frequencies up to 6.3 kHz are reasonable. The crosstalk from left to right and right to left channels is also reasonable. The channel level difference at 0.2 dB is remarkably well balanced and better than most cartridges we have seen. The square wave response is also clean and remarkably free of ringing. If anything, this indi-

cates the lack of response in the ultrasonic region.

Summary

Considering the performance of the rest of the turntable, the MG50 cartridge tends to be the weak link. Whilst it has a good frequency response and performs well on general recorded content, its transient performance falls far short of what one would expect from such a good turntable. In particular, with the Shure TTR101 Test Record, "Orchestral Bells" section, the cartridge cannot reproduce Level 4 and starts to distort significantly at Level 3. With the Shure TTR103 Test Record "Phono Trackability Test Record" it can only reproduce record peak velocities of up to 24 cm/sec beyond which it distorts badly. This is regrettable as the other performance parameters of the system are really excellent.

The TP929 Linear Motor Direct Drive Turntable is an excellent unit offering simplicity of operation and a generally superior performance. Fitted with a top line cartridge, its performance would be exemplary.

THE SANYO TP929 LINEAR MOTOR DIRECT DRIVE TURNTABLE, SERIAL NO. 98100851

Dimensions: 450 mm wide x 152 mm high x 374 mm deep

Weight: 7.8 kg

Recommended Retail Price: \$299

Manufactured by Sanyo Electric Company Ltd., Tokyo, Japan.

Absolute copyright in this review and accompanying measurements is owned by Electronics Today International. Under no circumstances may any review or part thereof be reprinted or incorporated in any reprint or used in any advertising or promotion without the express written agreement of the Managing Editor.

Microprocessor University Program from Texas Instruments



Today's marketplace demands scientists, engineers and technicians who are proficient in the use of microprocessors. These "computers on a chip" have found their way into virtually every industry and profession. As a result of this impact, business and industry is looking to our universities, colleges and technical schools to furnish specially trained, microprocessor-educated individuals. In addition, learning aids are necessary to bring industry's practicing engineers into the world of microprocessors.

Texas Instruments has developed a Microprocessor University Program as an aid to institutions of higher learning as they prepare their students for careers in this demanding profession, and as an aid to hold in-house courses on microprocessors or for a self-taught course for engineers.

The Microprocessor Program consists of the following for the attractive price of \$299.00*:

- An assembled and tested University Module (TM990/189) offering hands-on experience with microprocessors, I/O, memory, and assembly language programming.
- A 570 page Tutorial Text suitable for university courses, in-house courses for industry, or as a self-taught course for engineers or serious hobbyists.
- A 300 page User's Guide to acquaint the user with the full capabilities of the TM990/189.
- Local Technical Support.
- Additional Microprocessor Modules, Development Systems, Software are available.

In addition:

- Schools may obtain free software from Texas Instruments.
- A Power Supply is available for use with the TM990/189.

* Suggested resale excluding sale tax

Features of the Texas Instruments Microprocessor University Program

Tutorial Text

The 570-page *Introduction to Microprocessors* is a tutorial text written to satisfy textbook requirements at universities, colleges, and technical institutes for a three credit-hour course.

Emphasis has been placed on providing lab experiments at the end of most of the chapters to both test the student's progress, and to give them "hands-on" experience to reinforce their understanding of microprocessor concepts.

Tutorial Text Chapter Contents

Chapter 1. Overview of Computers, Microprocessors, and Microcomputers

- A. Basic Computer Architecture
- B. Example of Computer Operation
- C. Architectural Enhancements of Microprocessors
- D. TMS9980 Microprocessor Description

Chapter 2. Arithmetic, Logic, and the Arithmetic Logic Unit

- A. Number Systems
- B. Arithmetic Logic Unit
- C. On-Board Terminal (Terminal on University Board)
- D. On-Board Monitor Commands
- E. Exercises

Chapter 3. Introduction to Computer Addressing and Program Development

- A. Computer Addressing: Explanation of What It Means
- B. Instruction Set of Texas Instruments TMS9980 Microprocessor
- C. Programming Example, Exercises, and Lab Experiments

Chapter 4. Assembly Language

- A. Overview of Assembler Functions
- B. University Board Symbolic Assembler
- C. Directives, Labels
- D. Program Example and Lab Experiments

Chapter 5. Memory Systems

- A. Description of Memory Systems - Data Buffers, Manipulation, Memory Map
- B. Memory Characteristics, Systems
- C. Programming an EPROM for the University Board
- D. Program Example and Lab Experiments

Chapter 6. Input/Output Concepts

- A. Overview of I/O Operation
- B. Program Example and Lab Experiments

Chapter 7. Input/Output Design

- A. I/O Interfacing Considerations
- B. I/O Peripheral Components
- C. Program Example and Lab Experiments

Chapter 8. Modular Programming


- A. Definitions and Advantages of Modular Programming
- B. Subroutines
- C. Program Example and Lab Experiments

Chapter 9. Software Engineering

- A. Hardware/Software Tradeoffs
- B. Structuring the Software
- C. Linking Program Modules
- D. Interrupt Servicing
- E. Real-Time Considerations
- F. Program Example and Lab Experiments

Chapter 10. Product Development


- A. Product Overview and Definition
- B. System Design and Development
- C. Software Development
- D. Debugging, Testing, and Development Tools
- E. Program Example



TEXAS INSTRUMENTS
AUSTRALIA LIMITED

© 1979 Texas Instruments Incorporated

TM990/189

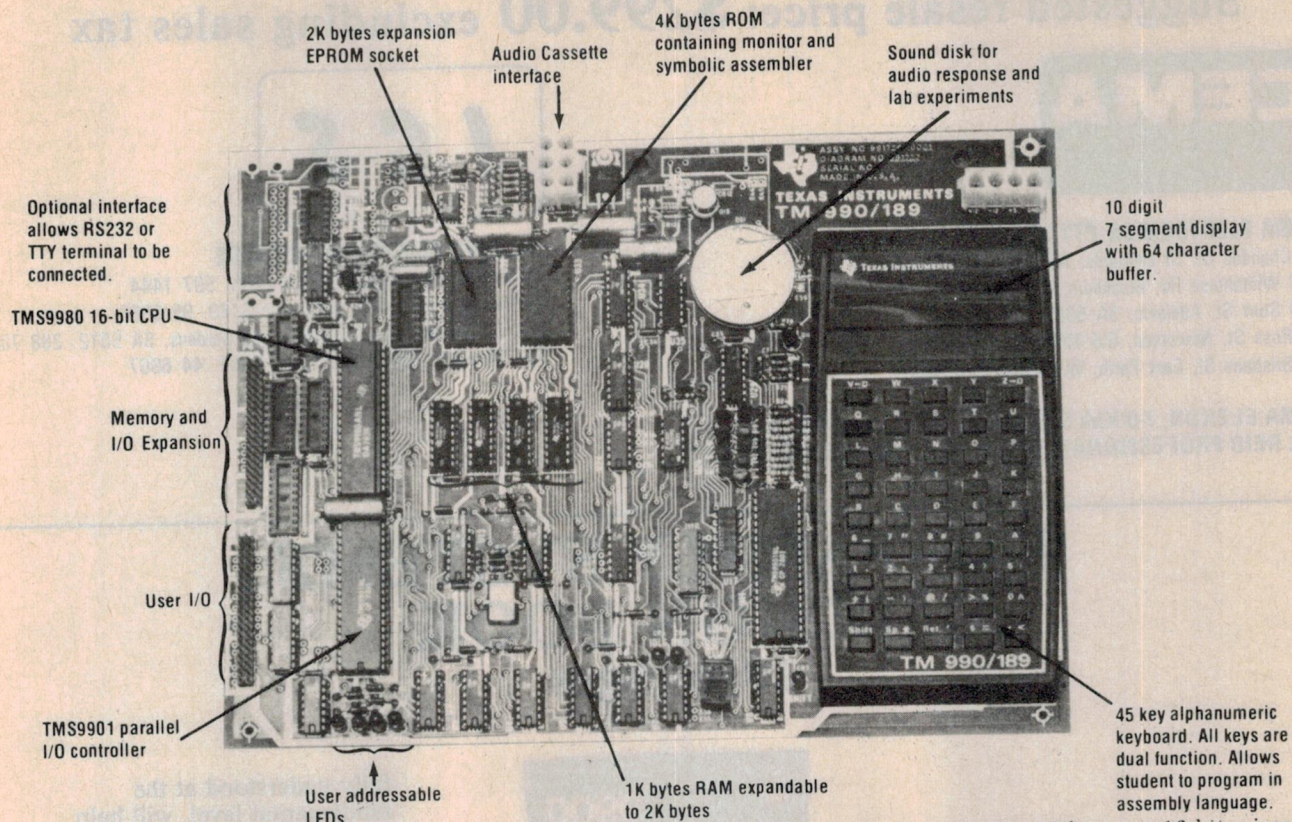

The TM990 University Module is a complete learning aid that, in conjunction with the Tutorial Text, offers hands-on experience with microprocessors, I/O, memory, and *assembly language programming*.

This powerful learning tool offers advanced features such as an alphanumeric keyboard that does away with the drudgery of programming in hexadecimal. With the TM990/189 the programming is done in meaningful assembly language.

The microprocessor on the University Module offers a powerful instruction set. Multiply and divide, vectored interrupts, single bit I/O manipulation, parallel I/O, and seven addressing modes, point out just a few of the

advantages of programming with a true 16-bit microprocessor and, also, the ease of learning and applying microprocessors.

Software development aids include a monitor and symbolic assembler which are contained in Read Only Memory and reside on the University Module. These aids help with both the writing and debugging of programs.

The student may connect* an inexpensive Audio Cassette to the University Module, if desired, for off-board program storage. The on-board RAM may be used for checking out a program and, after verification, the finished program may be put into EPROM, using a programmer, and plugged into the EPROM socket on the board.

*Optional extra parts required

ORDER FORM

Please make cheque/money order payable to Distributor of your choice. See below.

CEMA ELECTRONICS PTY LTD

21 Chandos St, St. Leonards, NSW. 2065. 439-4655.
208 Whitehorse Rd, Blackburn, Vic. 3189. 877-5311.
170 Sturt St, Adelaide, SA. 5000. 51-4080.
22 Ross St, Newstead, Qld. 4006. 52-4261.
25 Brisbane St, East Perth, WA. 6000. 328-8091.
Cema Elekon, 7-9 Kirk St, Grey Lynn, Auckland, NZ. 76-0019.
D.J. Reid Professional, 17 Huon St, Takapuna, NZ. 49-9197.

INSTANT COMPONENT SERVICE

16 Gertrude St, Arncliffe, NSW. 2205. 597-1444.
248 Wickham Rd, Moorabbin, Vic. 3189. 95-9566.
2/66 Humphries Tce, Woodville Gdns, SA. 5012. 268-7088.
343 Montague Rd, Westend, Qld. 4101. 44-6667.

Name

Address

..... Postcode

Please supply (. . .) units TM990/189 university boards at \$299.00 ea. plus tax = \$347.00 including packing and postage.

Please supply (. . .) copies LCC4400 - TMS9900 FAMILY SYSTEMS DESIGN AND DATA BOOK at \$15.95 ea. + \$2.00 packing and postage.


Call your Texas Instruments Distributor
Suggested resale price: \$299.00 excluding sales tax



CEMA ELECTRONICS PTY LTD

21 Chandos St, St Leonards, NSW 2065. 439 4655
208 Whitehorse Rd, Blackburn, Vic 3189. 877 5311
170 Sturt St, Adelaide, SA 5000. 51 4080
22 Ross St, Newstead, Qld 4006. 52 4261
25 Brisbane St, East Perth, WA 6000. 328 8091

CEMA ELEKON, 7-9 Kirk St, Grey Lynn, Auckland. NZ. 76-0019.
D.J. REID PROFESSIONAL, 17 Huron St, Takapuna. NZ. 49-9197.



INSTANT COMPONENT SERVICE

16 Gertrude St, Arncliffe, NSW 2205. 597 1444
248 Wickham Rd, Moorabbin, Vic 3189. 95 9566
Unit 2/66 Humphries Tce, Woodville Gardens, SA 5012. 268 7088
343 Montague Rd, Westend, Qld 4101. 44 6667

9900 FAMILY SYSTEMS DESIGN BOOK

1016 Pages

Texas Instruments has developed and is manufacturing a family of microprocessor products and systems based on the architecture of its 990 minicomputer. The purpose of this book is to present enough factual information about the 9900 and the family of devices and systems surrounding it to serve not only as a guide for deciding to use the 9900 in an application, but also as the primary reference for design and programming activities. The book is much more than a data book or a collection of application notes. It contains basic concepts, presents methods and techniques, and most important of all, shows how the architecture of the 9900, substantially superior to other microprocessor architectures, can be translated into cost effective applications.



In reading this book, you will see the 9900 product as more than a single microprocessor. You will find a family of processors, peripherals, boards, mini-computers and systems all based on a single architectural concept called *memory-to-memory architecture*. It is this basic principle which, when

fully understood at the fundamental level, will help you understand why and how the 9900 can be used to implement outstanding products. In addition, you will see why Texas Instruments has made the commitment to the continued support of the 9900 family in both hardware and software. New microprocessors and peripheral devices will retain and complement the basic architectural features—the 16-bit word length, the instruction set, the I/O techniques. etc. Texas Instruments software support goes beyond the standard assembler, editor, linker and PROM programmer software. New design tools such as POWER BASIC and PASCAL are now available. These powerful software products bring structured programming disciplines into focus and help you to attain an advanced programming capability.

LCC4400

— Suggested resale price \$15.95

**TEXAS INSTRUMENTS
AUSTRALIA LIMITED**



PACE System

A new system from an Australian company, JED Microprocessors, 28 Anderson Street, Boronia, Vic 3155, is based on a National Semiconductor INS8900, the 16-bit PACE microprocessor.

Several cards are available in the series which is centred around the MP16-100 CPU card, a stand-alone single card computer. This card carries 4 K words of RAM as well as up to 6 K words of EPROM containing a monitor program.

There is also a serial interface on board, and a special 256 word RAM segment used by the monitor. The PACE microprocessor has a minicomputer-like architecture, not unlike the Data General NOVA, with 45 instruction types.

Other cards in the system include a DMA-type VDU, a 32 K memory board and a multi-interface card. A floppy disk interface is on the way, along with a selection of other interface cards.

Software support includes an assembler and editor, industrial BASIC, an exceptionally powerful monitor, and two other languages are in development — UCSD Pascal and BCPL, a subset of the C programming language developed at Bell Labs.

Further details from JED Microprocessors.

New Sort/merge Program

A new sort / merge program which runs in systems with UCSD Pascal has been announced by Oblong Software Products, 19 Cedarleigh Rd, Kenmore, Qld 4069, ph. (07) 378 2415.

PSORT operates with fixed or variable length fields and records, can include or exclude records from the sort or merge process and supports multiple disks for input, output and work files. Up to 10 sort keys can be defined by the user, with mixed ascending/descending sequences, and the program will merge up to 10 pre-sorted files. The program, which is written in Pascal, is callable as a procedure from a user program. Dis-

Imagination Machine

Latest in the series of home computers being released in the States by calculator/watch/TV game manufacturers is the Imagination Machine from APF Electronics Inc.

Technical details at the moment are skimpy — it seems that this type of machine is marketed on user appeal rather than nitty-gritty technical comparisons.

The standard features include colour (American NTSC colour with something missing), 10 K of ROM and 9 K of RAM (the ROM probably contains an 8 to 9 K BASIC plus monitor, while the RAM is probably split so that 512 bytes is devoted to the VDU and another 512 to cassette and I/O buffers, the remaining 8 K being user space).

The keyboard is typewriter style with 53 keys including a unique shifted 'BASIC' keywords button, while the VDU has 32 characters in each of 16 lines. Also standard is a built in cassette deck, microphone jack and cartridge connector plus two game-style controllers.

At US \$499, the Imagination Machine will be marketed in the US through department stores, audio stores and through catalogue showrooms. The software support is heavily biased towards interactive educational programs, and floppy disk and modem interfaces are in development.

tribution is on a 203 mm (8") single density floppy disk, and the full Pascal source code is

provided (for UCSD Pascal Ver. 1.5). The price for PSORT is \$100.

Rumours Dept.

Any truth in the rumour that 3M are going to start retailing Scotch floppy disks through stationers' shops?

Lack of management expertise combined with undercapitalization has forced some US microcomputer manufacturers out of business. The problem has been exacerbated by an acute shortage of some LS TTL ICs which has left companies unable to completely assemble boards, kits or systems. Recent casualties have been Processor Technology (manufacturers of the SOL) and Imsai, one of the earliest companies in the market. Although both these companies have filed bankruptcy petitions, it seems likely that their product lines will continue to be available from other firms who buy the manufacturing rights. Other companies, like the Digital Group, have undergone management restructuring to gain financial know-how.

Virtually all companies are quoting long delivery times due to the chip shortage.

Not everyone's in difficulty, however. There is some speculation in the industry that Pertec are considering reintroducing the MITS Altair products they shelved a few years back.

Will Winchester knell the toll for floppies? With data capacities of 10 Mbytes and up for not much more than the cost of a floppy, many microcomputer systems are going to be based around the new Winchester-technology 8" (203 mm) hard disks now being announced by companies such as Shugart and Micropolis. Being non-removable, though, they don't offer the capacity for transport of software, a function which may be left to mini-floppies (or maybe even cassettes). Looks like the end for the 203 mm floppy!

JOHN F. ROSE COMPUTER SERVICES PTY LTD

Proudly announce the Australasian agency for the NDK Printer.

NDK SERIAL PRINTER **S-2000**

- 8085 microprocessor-controlled single board electronics
- Quiet operation
- Simplified mechanism with minimal moving parts
- Front or back paper feed
- 170 cps bi-directional printing, 42 ips automatic space skipping — 130 lines/minute at 136 characters/line
- 4"-15" paper
- AC voltage selector, 100-240 volts AC
- 10 cpi, 11.7 cpi, 5 cpi
- 9 x 7 dot matrix
- 6 months warranty
- Stand and interface included

Sole Australasian distributor:

John F. Rose
Computer Services P/L.
A.M.A. House, 33-35 Atchison St,
St. Leonards. 2065.
Tel (02) 439-1220.
AH (02) 328-6683
Telex AA27901

OEM enquiries welcome



New TI Programmable 58C with Constant Memory™ feature: now \$165*



If you enter a 480-step program today, the new TI Programmable 58C will remember it tomorrow...even if you turn it off overnight!

Now you can hold the power of a computer in the palm of your hand. Power that can dramatically increase your productivity. Provide the answers you need for rapid, accurate decision making. For exploring hypothetical "what if" situations. It's part of what the new era of "Personal Electronics" is all about.

The TI Programmable 58C, with plug-in application libraries and more than 170 functions and operations in scientific, engineering, and statistical fields ... now an even greater value with Constant Memory feature.


More easy-to-use software.

Take advantage of the versatility of the new TI Programmable 58C and new software. Twelve optional *Solid State Software™* libraries are now available. Each plug-in library module contains dozens of prewritten programs. Solid-state libraries are available in a variety of fields including engineering, science, sta-

tistics, and business. From \$36*

The *Professional Program Exchange* lets you exchange programs with members. Over 1,500 programs are already available.

Specialty Pakettes are conveniently formatted program listings available in 16 subject areas. Just follow the program listings and tackle a wide variety of problems without the need to do any conventional programming. With the TI Programmable 58C's Constant Memory feature, you won't lose your program if you have to turn the calculator off. \$9.10* per subject.

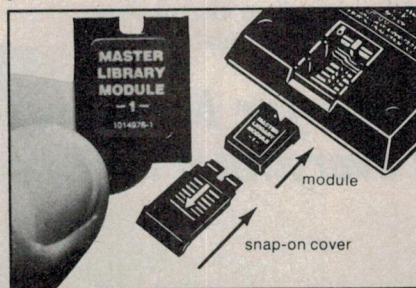

In addition, *Custom Software Modules* can be developed for specialized applications and a unique *Professional Productivity Program* is available for corporate use.

Printing and plotting capability.

Add the PC-100C printer/plotter to your TI Programmable 58C and you can plot, prompt, and print inputs and outputs automatically. \$285*



Free literature.

Please call or write to your Texas Instruments Calculator Distributor.



NSW; A.J.F. Systems & Components, 808-2555. Email Ltd (Metering Div.), 699-0033. Silicon Valley, 439-2965. VIC; A.J.F. Systems & Components, 67-9702. Delta Scientific Product Distributors, 366-3742. Email Ltd, 557-2944. Silicon Valley, 429-4780. S.A.; A.J.F. Systems & Components, 269-1244. Email Ltd, 51-0411. Silicon Valley, 51-4080. W.A.; Esdailes of Cloisters, 926-6319. QLD; Email Ltd, 44-0281. Silicon Valley, 52-1339. TAS; J. Walch & Sons, 34-7511. N.Z.; David Reid Data Products, 49-9197.

Texas Instruments technology - bringing affordable electronics to your fingertips.

TEXAS INSTRUMENTS
AUSTRALIA LIMITED

* Suggested retail price.




Cromemco microcomputers

TOMORROW'S COMPUTERS NOW

SYSTEM THREE FEATURES:

- Fast Z-80A microprocessor
- RAM expansion to 512 K Bytes
- 2 or 4, 8 inch disc drives
- 21 slot S-100 bus
- Printer interface
- RS-323 or 20 mA serial interfaces
- Excellent service access

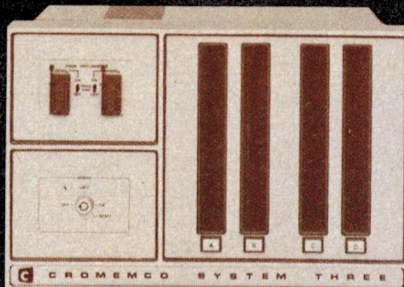

COMPREHENSIVE SOFTWARE SUPPORT

- Disc operating system (CP/M compatible)
- 16K disc extended BASIC
- Multi-user BASIC
- Cobol compiler
- FORTRAN IV compiler
- Z-80 macro-assembler
- Word processing and Data base management

ADAPTIVE ELECTRONICS NOW OFFERS THE SUPERB RANGE OF CROMEMCO COMPUTER SYSTEMS, PERIPHERALS AND SOFTWARE, INCLUDING SOFTWARE SUPPORT AND PROFESSIONAL HARDWARE BACK-UP

**AE ADAPTIVE
ELECTRONICS P/L**

77 Beach Road, Sandringham, Victoria, 3191,
Australia. Telephone (03) 598-4422 Telex: 35666
PERTH: Micro-Data, 437 Cambridge St, Wembley. 6014. Ph: (09) 387-3314.

Steer a straight course for October's

Modern boating & Seacraft

BIG, BRIGHT, COLOURFUL AND BREEZY.

An eight-page supplement on navigation. Be a yachtsman from the bottom up — our comprehensive eight-page survey on bare hulls for completion by Do-it-yourself owners. How to afford the boat you've always dreamed of. Bright ideas on finance and leasing. Sam Orr reviews Sydney's waterside eateries, plus other nautical tidbits.

*The best magazine for boat-lovers
Because it covers everything that floats*

**ON SALE
AT NEWSAGENTS**

Printout

Rumours, Part II

A new device from Advanced Micro Devices, the Am9513, contains five 16-bit general purpose counters, and can perform all the timing and counting functions for the majority of microprocessor applications. With its internal clock (up to 7 MHz), and up, down, binary or BCD counting modes (22 modes in all), the Am9513 is the most advanced counter/timer chip to appear on the market...

For those suffering from the octal TTL shortage: Motorola have announced a new part which is electrically and mechanically compatible with the 74LS373 octal latched buffer. The MC6882B will sink up to 48 mA into a low output — roughly twice the capability of a standard LS373, and will also drive a 500 pF load...

Intel's analog microcomputer, the 2920, is now available, with a price tag of US\$250 in 100 lots. The 2920 includes a 25-bit arithmetic processor, 192 x 24-bit EP-ROM, and a 40 x 25-bit scratchpad RAM. The processor converts analog signals to digital, processes the resulting digital information, and converts it back to analogue for output...

A new speech synthesizer from the Votrax division of the Federal Screw Works is intended for telecommunications application and can service up to 64 telephone lines simultaneously. So next time your call doesn't go through and you get a tape-recorded message, it may not actually be a tape-recorded message...


Colour comes to computers: perhaps prompted by the colour video displays becoming increasingly 'de rigueur' in personal computing circles (e.g. Apple II, Compucolor), both IBM and DEC are set to release colour terminals...

Control Data are test marketing their Plato terminals in 100 Minneapolis homes in an attempt to find out if home residents will 'use the terminal in a meaningful way'. The system, which was originally developed for education, offers moving graphics capability and is extremely interactive. A Plato terminal normally leases for over \$1100 per month to commercial users, but apparently the home terminals are being leased for only \$100 per month...

Rumoured to be coming for the 8080: a version of the Unix operating system, which was developed at Bell Labs. This multi-user OS was originally written in the programming language C, another Bell Labs creation which is now available for micros...

After growing and growing, the UCSD Pascal project has finally outgrown the University of California at San Diego. The successful licensing activities of the university project were threatening the school's tax-exempt status, and so Softech Inc, in Waltham, Mass. has taken over full responsibility for UCSD Pascal, including the right to improve the basic package, increase fees and draw up licensing agreements with others...

Nixdorf Computer, a major West German manufacturer of small business computers, is expressing some interest in the personal computer market and are negotiating a deal with Lexicon Corp. (of language translator fame) to market Lexicon's products internationally. Add-ons coming for the Lexicon translator are said to include an RS-232 interface, turning the machine into a portable terminal, as well as the Personal Program, which enables the user to program in 1 K of appointments, business notes, phone numbers, etc...

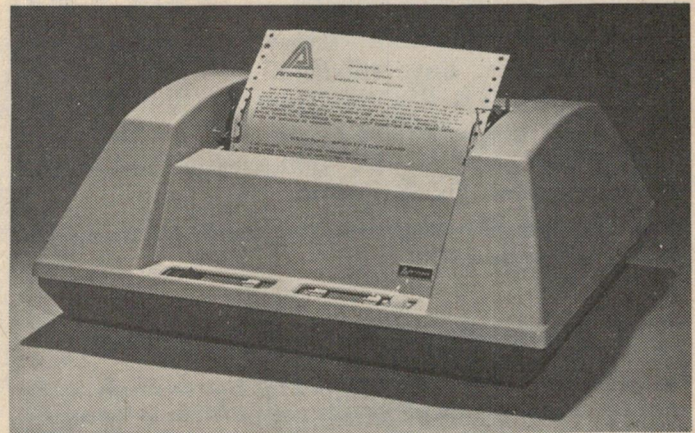

Anadex updated

The Anadex DP-8000 80 column line printer released early this year by Bell and Howell and successfully marketed through Dick Smith, Computerland, EAI-Electronic Associates Pty Ltd and other systems suppliers, has been re-released with a range of new features giving what is claimed to be the best price/performance ratio of any 80 column dot matrix printer currently available.

The fast throughput and high reliability of the earlier model, its universal interface and 9 x 7 character set, have now been augmented by the addition of a new high stability print mechanism, 1 K standard storage (extra 2K option), integral test diagnostics facility and movable sprockets for various paper widths.

These additional features have not increased the selling price of the DP-8000, and the new model is now available ex-stock from Bell and Howell's distributors. Comprehensive spares and support is provided Australia-wide by Bell and Howell for the entire range of Anadex printers and peripherals.

Petsoft

An interesting catalogue which landed on our desk the other day offers an enormous selection of programs for the Commodore PET computer.

These include the Petact business system software (sales accounting, purchase accounting, sales invoicing, stock control and payroll, all for disk or cassette) and a plug-in ROM called the 'Programmers Toolkit', ('10 powerful new commands for your PET!'). There is an enormous list of programs, under such

headings as business programs, programming aids and tutorials simulations and games, and educational mathematical and scientific. For PET owners, this catalogue is a must. Petsoft, Radclyffe House, 66-68 Hagley Road, Birmingham B16 8PF, England.

Darling Downs Group

A new group for your notebook, if you're in the Toowoomba area: Darling Downs Microprocessor Group, meeting algorithm not given, but deduced to be the first Tuesday of the month, at the RMC Theatre of Darling Downs Institute of Advanced Education.

For further details contact Ken Griffiths, School of Business Studies, DDIAE, on (076) 30-1300. Recent meetings have

covered a variety of topics, and the group also runs programming courses and displays.

6800 ROM/PROM ▶

A new PROM card from Pennywise Peripherals can accommodate any mixture of 1 K PROMs (2708, 2758), 2 K PROMs (Intel 2716, TMS2516, TMS2716), or 4 K PROMs (2732, 2532). It has space for 16 PROMs and can be configured to have a total capacity of 16 K, 32 K, or 64 K.

Further details from Pennywise Peripherals, 19 Suemar St, Mulgrave, Victoria 3170.

TRS-80 gets full-size floppies

The real power of a small computer is not so much in the speed or extended instruction set of its CPU as in the speed and capacity of its mass storage and the capability of its VDU interface.

An 80 x 24 memory-mapped VDU with lower case, for example, can present information much better than a serial-linked 32 x 16 with upper case only.

This is where full-size floppies have it all over mini-floppies. The 203 mm floppy (that's the Australian metricated equivalent of the US-style 8-inch floppy) offers about double the capacity of the 133 mm floppy (sorry about this, but metric units are required by law) and runs considerably faster. The speed factor is not significant for most personal computing applications but the greater capacity of the 203 mm disk makes a heck of a difference.

For example, the well-known CP/M operating system was designed for full-size floppies and the version which is available for 5" (oops, sorry, I meant 133 mm) disks runs like a lame dog in comparison. CP/M is an important piece of software for most disk-owning computer buffs, because a lot of software is available to run under it, so that it has provided a de facto standard for software exchange.

The major problem with the TRS-80 has been its inability to run CP/M because CP/M lives at the bottom of memory, where Radio Shack have thoughtfully placed a great lump of ROM. There is a non-standard version of CP/M around which lives higher up in memory, but this will not run the bulk of the nice CP/M-compatible software which is available.


This is why a company called Parasitic Engineering (1201 10th St, Berkeley, CA 94710, USA) has done the TRS-80 community a great service with their latest two products. The first is a 203 mm floppy drive with controller and patches to TRS-DOS, called the Maxi-Disk. With this alone, it is possible to run TRS-DOS on both 203 mm and 133 mm disks, mixed together if need be — the controller allows both disk sizes at the same time.

The second, more significant, offering is called the Shuffleboard. This board plugs into the Z-80 socket and moves the ROM in the TRS-80 from the bottom of memory up near the top, and brings the RAM down, through some judicious tinkering with the address lines. This will allow the TRS-80 to run a proper CP/M without modification or reassembly of programs — probably the most worthwhile innovation yet for the TRS-80. When will somebody do a modification for the VDU circuitry?

With upper and lower case, the Radio Shack machine would be a very nice system.

The Maxi-Disk is priced at US \$995, and the Shuffleboard, complete with CP/M on an 8" (damn, I meant 203 mm) disk, is \$245.

Parasitic don't seem to have a representative or agent in Australia, but it can only be a matter of time before some enterprising company grasps this opportunity — provided they can overcome the problem of converting 8" disks!

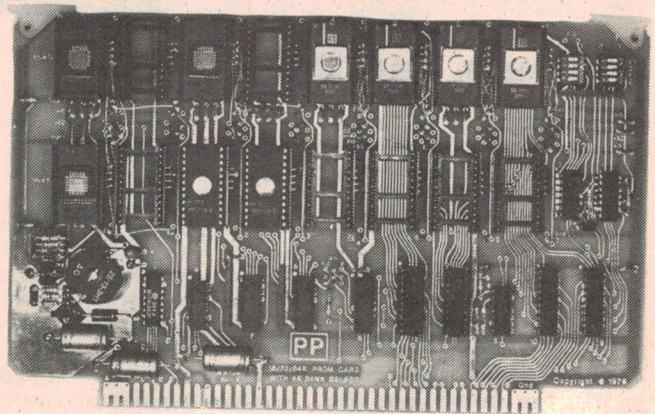

IMS software

Readers who intend to use a microcomputer in their business should check out the software offered by IMS Computer Systems, 582 St Kilda Rd, Melbourne 3004.

IMS, which is a division of Integrity Management Services, has for some time been marketing a range of very competitively priced software for small businessmen, and have just released version 2.0 of their payroll system.

The new program caters for such niceties as the two termination amounts which must be shown on group certificates from July 1st. It also has ten rates of pay, 20 allowances and/or deductions (all of which can be before or after tax) and

caters for weekly, fortnightly, and monthly pay by cash, cheque or bank transfer.

Source code on disk is \$1,500 and the object code is \$300. An update service is available which will keep the tax scales and other government-related variables up to date.

The new payroll program complements the standard commercial software (invoicing, stock control, debtors, creditors, general ledger, etc.) which IMS have had available for some time.

Apple II Plus

At the New York Computer Conference (NCC), Apple released the new Apple II Plus. Intended for the professional and business user, this model has the popular Applesoft floating point extended BASIC as the standard language in on-board ROM. In addition to BASIC, a plug-in extension is available offering UCSD Pascal, a high level language of special interest to educational institutions and commercial software houses.

The Apple II Plus is priced at \$1995 including tax — this price includes a 330 mm monochrome monitor and a PAL colour generator for connection to standard domestic colour TV receivers, 16 K of user RAM and Applesoft BASIC in ROM.

Apple are represented in Australia by Electronic Concepts Pty Ltd and are available from Computerland stores.

Cromemco User's Group

Adaptive Electronics, of 77 Beach Road, Sandringham, Vic 3191, agents for Cromemco computers, are starting up a Cromemco User's Group.

The group will provide a facility for the exchange of Cromemco-compatible software, as well as assistance with technical hardware/software problems. Potential members should contact Adaptive for further details.

Computer Faire

For those planning a holiday in the US in the near future, here's a tip: the 5th West Coast Computer Faire has been finally scheduled to take place in San Francisco's Civic Auditorium & Brooks Hall on March 14th to 16th, 1980 (Friday through Sunday).

MEMORITE 2



VECTOR GRAPHIC Word/Data Processing \$9,900 PLUS \$1,098 SALES TAX

The VECTOR GRAPHIC Memorite 2 is a complete professional grade word processing system which can also perform all the data processing functions of the Vector Graphic System B. Text is typed at a keyboard and is immediately displayed on a video screen. At the same time, it is memorized by the machine. The text then may be modified without retyping it. It can be stored on magnetic diskette and later retrieved for further changes. At any time drafts of text can be printed on a typewriter-quality automatic print-

er. Finally, the document can be modified and then reprinted as many times as desired. Vector Graphic are a leading microcomputer manufacturer situated in California, U.S.A. with a reputation of quality and reliability in the computer industry. A.J. & J.W. DICKER Pty. Ltd. have been appointed as the Australian Distributor for Vector Graphic products, to support and service the equipment with the standard to maintain the system's reputation. Dealer Inquiries Invited.

AJ. & JW. DICKER

24 Woodfield Boulevarde, Caringbah 524 5639

IT HAD TO HAPPEN!



SAVE UP TO *
40% ON TANDY & FULLY COMPATIBLE



Easy terms available!

HUGE PRICE BREAKTHROUGH!

ONLY \$595,
WITH LEVEL II BASIC!

DICK SMITH SYSTEM 80 – THIRD GENERATION COMPUTER SYSTEM – THE COMPUTER OF THE DECADE!

**COMPLETE
WITH TANDY COMPATIBLE
LEVEL II BASIC
SO ALL TANDY PROGRAMS ARE
FULLY USABLE**

**IT ALLOWS YOU TO MAKE USE OF THE
LARGEST RANGE OF COMPUTER
SOFTWARE IN THE WORLD!**

AND MORE!

* **THE SYSTEM 80 EXPANSION UNIT IS
S-100 BUS COMPATIBLE – NOW
TANDY SOFTWARE WITH AN S-100
BUS – AT A HUGE SAVING.**


WHEN WILL IT END?

* **AND EVEN MORE,
VIDEO MONITOR NOT
NECESSARY!**

**THIS UNIT SIMPLY PLUGS INTO
YOUR STANDARD TV SET (SAVE UP
TO AN ADDITIONAL \$250!)**

Yes, we agree, the Tandy TRS-80 HAS BEEN the best selling microcomputer in the world. The original TRS-80 design is now over 2 years old, and in the microcomputer industry 2 years is a long time.

THE DICK SMITH SYSTEM 80 is fresh from the design laboratory and features latest **"STATE OF THE ART"** techniques.

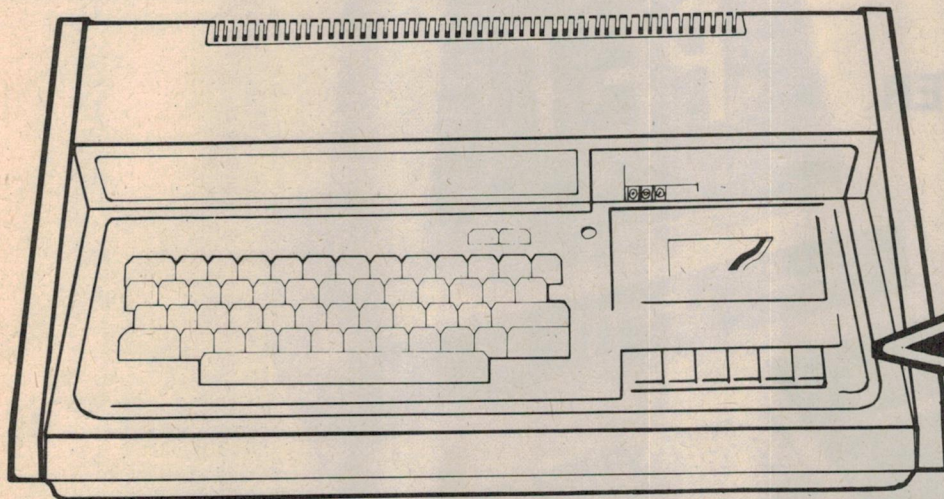

**INBUILT
CASSETTE
DECK**

**AND PROVISION
FOR AN
ADDITIONAL UNIT.
(TANDY ONLY
ALLOWS THE USE
OF ONE!)**

PRICE PLUMMETED
and features have been added.
In our opinion, the greatest
disadvantage of the TRS-80 is the
fact that it is not S-100 Bus
compatible, meaning that the
fantastic range of S-100 products
(speech synthesizers, disk
controllers etc.) are not readily
usable. This problem has now been
solved with the

**DICK SMITH
SYSTEM 80**

We expect delivery
in November.

To buy elsewhere
without seeing the
SYSTEM 80
could be a costly
mistake!



BASIC SPECS:

- ★ Z-80 microprocessor
- ★ Takes two cassette players one is built in!
- ★ RF output direct to TV set (video output as well!)
- ★ 12k Tandy compatible BASIC
- ★ 16 lines of 64 characters or 32 characters
- ★ 128 x 48 graphics matrix
- ★ Dick Smith backup
- ★ Expansion with S-100 system

* When comparing Tandy TRS-80 with level II BASIC, 16k RAM and cassette recorder (\$1178.95) with System 80 16k (\$695.00) **YOU SAVE nearly \$500.00 or more than 40%!!!!**

SYSTEM 80

With Level II BASIC
(12k); Inbuilt recorder;
Demonstration tape;
Inbuilt TV modulator;
4k RAM:

\$595

Cat. X-4003

SPECIAL OFFER

As described,
but with 16k
RAM (Cat X-4005);
(Tandy equiv.
value \$1178!)

\$695

Offer valid only for
orders received for
our first shipment.

DICK SMITH ELECTRONICS

NSW 125 York Street,
147 Hume Highway,
162 Pacific Highway,
30 Grosse Street,

SYDNEY Phone 290 3377
CHULLORA Phone 642 8922
GORE HILL Phone 439 5311
PARRAMATTA Phone 683 1133

263 Keira Street,

WOLLONGONG Phone 28 3800

ACT 96-98 Gladstone Street,
VIC 399 Lonsdale Street,
656 Bridge Road,
QLD 166 Logan Road,
SA 203 Wright Street,
WA 414 William Street,

FYSHWICK Phone 80 4944
MELBOURNE Phone 67 9834
RICHMOND Phone 428 1614
BURANDA Phone 391 6233
ADELAIDE Phone 212 1962
PERTH Phone 328 6944

EXCEPT WHERE NOTED, ALL ITEMS SHOWN IN STOCK AT PRICES GIVEN AT TIME OF GOING TO PRESS.

MAIL ORDER CENTRE: PO Box 747, CROWS NEST NSW 2065. Ph 439 5311. PACK & POST EXTRA.

bankcard
welcome here

SHOPS OPEN 9AM to 5.30PM
(Saturday: 9am till 12 noon)
BRISBANE: Half hour earlier.
ANY TERMS OFFERED ARE TO
APPROVED APPLICANTS ONLY
RE-SELLERS OF DICK SMITH
PRODUCTS IN MOST AREAS OF AUSTRALIA.



"Where you reap the benefit!"

commodore PET™ **YOUR COMPLETE PERSONAL COMPUTER...**

**FOR THE
PRICE OF
A TOP
TYPEWRITER**



At Hanimex, we believe that everyone should benefit from the latest technological advances.

That's why we have introduced the Commodore PET, a personal, portable computer that's surprisingly inexpensive.

The PET has been specially designed for people who want all the advantages of computer processing without the cost and complexity of most mini-computer systems.

It consists of a TV screen, keyboard and built-in cassette deck. So you don't need an additional TV monitor, just plug it into mains power.

Because the PET is a personal computer, it uses BASIC language. The easiest to learn and the simplest to programme. And over 200 standard programmes in business, science, education and entertainment are already available.

Storekeepers need PET for inventory control. Engineers use it for complex calculations. Professional men can maintain their records. Graziers can control stock and feed statistics. Real estate agents can catalogue property profiles, and in the home, PET can help you relax with entertainment programmes including chess, backgammon and space games. It also incorporates teach-yourself programmes for subjects such as mathematics and languages. Whatever the job, you will have a need for PET at work and at home.

Dealer enquiries invited

For further information or a demonstration call the Business Equipment Division.



HANIMEX

The Australian company with the international reputation.

HAN4/79

The Central Data 64K RAM board reviewed

Made in USA by Central Data Corp., Champagne Illinois
Reviewed by Les Bell

Board supplied by Rod Irving Electronics,
Shop 499, High St, Northcote Vic 3070.

CENTRAL DATA are perhaps best known for their 2650 systems which are compatible with the S-100 bus. By designing this compatibility into their system, they have been able to reap one important advantage: their memory card will also work with 8080 and Z-80 systems on the S-100 bus, ensuring them plenty of sales, especially in the United States where the 2650 is not particularly popular.


Their 64K RAM Board is a dynamic type, which some people would regard as an open invitation for trouble. In the words of Sporting Life (I think), 'It ain't necessarily so'. In fact this card has

been very cleverly designed to avoid problems while still being fairly simple. These two considerations are quite possibly related.

Although the card has sockets for a full 64K of 2117-type 16K RAM chips, this is too much of a blow to the pocket-book for many buyers and it is supplied with only one row of chips installed with sockets for the remaining 48K. These can be installed later, when the bank balance allows. This means cheap upgrading to a large system, as there is no further investment in pc board real estate (always expensive) or refresh electronics.

The circuit design is fairly straightforward, making use of the Intel 3242 address multiplexer and refresh counter IC. This IC considerably reduces the system complexity and relieves the designer of a number of options at the design stage. In order to get all the address signals into a 16K chip (it needs 14 bits of address) which is encapsulated in a 16 pin package, the address lines must be multiplexed into two batches of seven, the low order bits (A0 to A6) being referred to as the row address, and the high order bits (A7 to A13) as the column address.

The 3242 automatically takes care of ▶

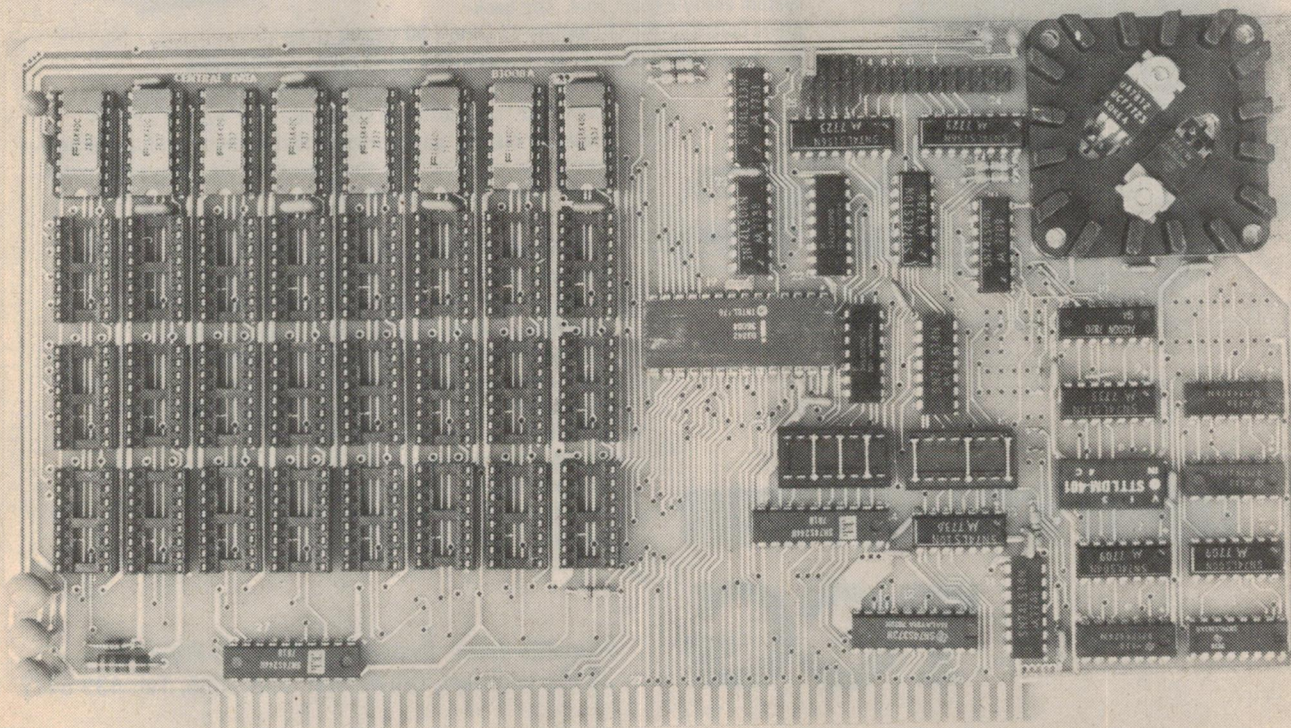

At Last A Computer We Can All Afford

CHALLENGER I SERIES

Economical computer systems, ideal for personal use.

Superboard II — a complete system on a board requires a 5 volt supply to be up and running.

Challenger 1P — fully packaged Superboard II with power supply.

Both systems feature a 32 x 32 character display, 4K RAM on the board, Keyboard and ready-to-run BASIC-in-ROM.

Challenger I's are expandable with up to 32K of RAM, dual mini-floppies, and printer.



\$459

\$367



\$792

TV set and cassette recorder not included.

CHALLENGER II SERIES

C2-4P — a high performance BUS oriented modular microprocessor system easily expandable. The back-plane construction allows any of Ohio's 50 boards to be readily added, such as memory expansion options, A/D convertors,

Voice I/O, printer, disk controllers and many more.

The **C2-4P** has a software selectable 32 x 32 and 32 x 64 character display, and a programmable keyboard for real time interactive use. The C2 is the choice for the serious computer owner planning on expansion.

All systems include 4K RAM, a typewriter style keyboard, video output suitable for use with an RF converter (not supplied) to a standard TV set, and the reliable Kansas City standard cassette system. Microsoft's 8K BASIC-in-ROM avoids lengthy loading from cassette and features full string manipulation, floating point and trigonometric capabilities. A machine code monitor in ROM, plus an Assembler allow access to machine code programming. A large range of programs are available for education and entertainment. Contact us for further details.

OHIO SCIENTIFIC TCG

Australian Dealer: Systems Automation Pty. Ltd.
26 Clarke Street, Crows Nest NSW 2065. Tel: 439 6477

AUTHORISED OHIO DEALERS

N.S.W.

Trevor Burton Pty Ltd
93 Beatrice Street,
BALGOWLAH, NSW 2093
Phone: 94-3861

Manly Stationary Supplies
15a The Corso,
MANLY, NSW 2095
Phone: 977-2316

Compuwest
P.O. Box 603
BATHURST, NSW 2795
Phone: (063) 375-235

Dwell Electronics
77 Edgeworth-David Ave.
HORNSBY, NSW 2077
Phone: 487-3111

Co-Ordinated Software Systems P/L
16 Tarro Close,
HORNSBY, NSW 2077
Phone: 476-6820

Compuserve Newcastle P/L
Suite 31, 301 Tudor St,
HAMILTON, NSW 2303
Phone: (049) 612-579

VIC
Looky Video
418 Bridge Road,
RICHMOND, VIC 3121
Phone: (03) 429-5674

Abacus Computer Store
512 Bridge Road,
RICHMOND, VIC 3121
Phone: (03) 429-5844

Computer Co-Ordination Services
Suite 2,
96 Camberwell Road,
EAST HAWTHORN, VIC 3123
Phone: (03) 83-1894

W.A.
Micro Data Pty Ltd
25 Brisbane Street,
EAST PERTH, WA 6000
Phone: (09) 328-1179

Micro Solutions
322 Hay Street,
SUBIACO, WA 6008
Phone: (09) 381-8372

Compulator Australia,
Cloisters Square,
863 Hay Street,
PERTH, WA 6000
Phone: (09) 321-9232

QLD
The Electronic Circuit,
Suite 414,
Fashion Valley Building,
20 Duncan Street,
FORTITUDE VALLEY, QLD 4006
Phone: (07) 52-8455

S.A.
Applied Data Control,
244 Glen Osmond Road,
FULLARTON, SA 5065
Phone: (08) 79-9211
Neil Pollard

TAS
J. Walch & Co.,
130 Macquarie Street,
HOBART, TAS 7000
Phone: (002) 34-7511
James Powell-Davies

A.C.T.
Minicomputer & Electronic Services
Suite 2, 46 Colbee Court,
PHILLIP, A.C.T. 2606
Phone: (062) 82-1774
Cliff Beechey

N.T.
Gem Electronics,
82 Bradshaw Drive,
ALICE SPRINGS, N.T.
Phone: (011) 52-4820
Graham Langsford

multiplexing the address lines, so that's one less problem for the designer. In addition, it contains a 7-bit counter, which can also be multiplexed onto the output pins, thus cycling through the row addresses to ensure that each row is refreshed. Remember, if the memory is not read every 2 ms, then the charge on the memory cell will leak away, thus losing the data. The 3242's counter will, if provided with the right signals, cycle through all the rows every 2 ms, thereby achieving the refresh.

The refresh timing seems to be derived from a delay line (at least, I'm assuming that an STTLDM-401 is a delay line, having no data on it). This means that the refresh timing and arbitration is done independently of the system bus timing, or at least asynchronously to it, thus making the system relatively independent of the processor's address set-up and strobe timing. This means that the board is comparatively processor independent, and will work with 2650, 8080 and Z-80 processors, whether they provide true S-100 bus timing or not. Most non-8080 CPU's don't — a point to bear in mind when choosing a system.

The card is set up to work with different processors by re-wiring a couple of DIP headers, and complete instructions on how to do this are given in the manual. There is no complicated set-up procedure, no one-shots to tweak, and the board seems to be free of the bugs that troubled earlier delay line based designs. *Our review sample has given glitch-free operation in an 8080 system for approximately 100 hours.*

The board is of good quality construction and is supplied assembled and tested. It really is not worthwhile building memory boards these days, some manufacturers even price their kits higher than their assembled and tested boards, figuring in the cost of repairing the boards returned to them by constructors who lack the experience and/or equipment to get the boards to

work. Finding an IC that's been inserted 180° the wrong way is quite an expensive and time consuming procedure, even if it is a silly and obvious error with the benefit of hindsight. (Yes, Virginia, even I have done it.)

Sockets are provided for the memory ICs, but the rest are soldered directly into the board. I can never make up my mind on the wisdom of this: one school of thought says that sockets are an invitation to pins to bend up under the IC and not make contact, or to other problems such as oxidation and mechanical failure. Another philosophy is that sockets make fault finding easy by the substitution approach as well as enabling rapid repair. I can only say that every other board in my computer is fully socketed, and I've had no trouble with sockets at all. Still, each to his own (but just try and buy a 28-pin desoldering tool). (Yes, Virginia, I have heard of solder wick).

The manual supplied with the board is nicely produced and clear in its instructions about setting up. Curiously, nowhere does it explain the operation of the circuit which is why I have to assume that the STTLDM-401 is a delay line. This is rather disappointing — better the devil you know, I always say.

Unfortunately, we were unable to try the board out with any other type of CPU apart from the nice old, safe, dependable 8080 and so cannot vouch that it will get up and go with the more unusual or exotic machines. There is no reason to doubt that if your CPU can provide a half-decent facsimile of the S-100 signals then this board could survive quite nicely on a diet slightly deficient in XRDYs, MWRITEs and so on.

The board is probably not fool-proof (if someone designs a foolproof system, only a fool will want to use it), but if you have an S-100-ish system, then the Central Data 64K RAM Board is a good inexpensive way of packing a lot more bytes into it.

Manufacturer's Specification — Central Data 64K RAM Board

Capacity:	64K bytes, addressable as four 16K blocks
Access time:	450 ns
Cycle time:	480 ns
Maximum input load:	One LS TTL load
Maximum DMA rate:	1 MHz
Wait states generated:	none
Power Consumption (typical):	
+16 V:	150 mA
+8 V:	300 mA
-16 V:	20 mA
Price:	\$399 for 16K

SEMCON

MICROCOMPUTERS PTY. LTD.

AUSTRALIAN MANUFACTURERS OF MOTOROLA COMPATIBLE PRODUCTS


In addition to our own range of modules we are now distributors of the CMS RANGE OF MOTOROLA BUS COMPATIBLE MODULES

MICROWARE SOFTWARE

For 6800 Systems

		Price	Manual only
Basic Compiler:	Cassette	\$ 75	\$20
	SWT	175	20
	SSB	175	20
	MDOS	500	30
Basic Interpreter:	Cassette	\$ 75	\$20
	SWT	95	20
	SSB	95	20
	MDOS	300	30
Basic Source Generator:	SWT	\$ 65	\$20
	SSB	65	20
	MDOS	175	20

RT68 MULTI TASKING OPERATING SYSTEM
Supplied on 2708 ROM, \$65. Manual Only \$45.
D2 UPGRADE KIT
With RT68 ROM, \$95, without ROM \$45.
CHESS CASSETTE \$60.



CRT-01 VIDEO INTERFACE

\$285 PLUS TAX

This powerful unit has been designed to efficiently interface the memory of Motorola compatible systems directly to a CRT display. It is software driven and with appropriate program can be made to emulate the majority of functions of currently available intelligent terminals.


- No page buffer — the card has a line buffer that is continuously refreshed from processor memory on a DMA basis: a) Phase 2 when CPU VMA is low, or, b) Phase one. This is completely transparent to the processor resulting in a flicker free display without halting or slowing processor
- Displays up to 32x2k pages simply by changing contents of 8 bit page register
- Hardware scrolling controlled by scroll register
- Displays full 128 ASCII character set (Control characters optional)
- Inverse video (may be mixed with normal video)
- Coarse graphics
- Link programmable character/line (48, 64, 80)
- Link programmable lines/page (20, 22, 24)
- Additional line at bottom of page for status information — unaffected by scrolling
- Dot rate controlled by phase locked loop — automatically adjusts to different formats.

32K STATIC RAM: \$569 KIT

- Page mode operation — allows system expansion to 1 Megabyte
- Quality PCB with solder resist
- Motorola Bus compatible
- Low power — 2.5 Amps
- 300nS access
- Fully static operation
- Buffered address, data and control lines
- Power rails in grid network for improved noise immunity
- 4 x 8K blocks — individually addressable — each write protectable — may be removed from address space if not required
- Multi-phase operation — the module allows access during phase one and phase two — ideal for multiprocessing or DMA channels

	KIT	ASSEM.
32K	\$569	\$599
24K	469	499
16K	359	389
8K	249	275

CMS 9600 CPU MODULE



\$565 A&T

- 6802 CPU
 - 1.1K Static Ram with battery back-up
 - 6K Eprom
 - Programmable timer
 - 2 PIA's
 - 2 ACIA's — RS232
 - Priority interrupt
 - Address and data buffers
 - Power failure protect/restart
 - MC14411 Baud rate generator
- (One ACIA may be replaced with SSDA)

New from Semcon


6809 Based CPU Module

Semcon now has production quantities of the new MC6809 CPU chip in stock. A new Exorciser compatible module featuring this device will be available late Oct. '79 subject to supply of OS9 operating system.

- Pin & outline compatible with Exorciser cards
- 6809 CPU
- Programmable timer
- 14411 baud rate generator
- 2 x 6821 PIA's
- 2 x 6850 ACIA's with RS232
- 4K static RAM
- Provision for up to 16K of EPROM (may use 2708, 2716, 2516 or 2532)
- OS9 — this operating system developed by Microwave comes supplied in ROM.

Further details and pricing on request.


WIRE WRAP BOARD



- Double-sided ground & plus 5V
- plus/minus 12V on card
- Plated holes
- Gold edge connector

\$47

BUS EXTENDER BOARD



\$68




SEMCON RACKING SYSTEM

\$153

(\$94 for rack without connectors)

- Sturdy aluminium construction
- Blue anodised finish
- Accommodates 8 Motorola Bus compatible cards
- Tin plated backplane with ground plane on one side
- 8.43x20.156" edge connectors.




8K/16K EPROM MODULE

- Motorola Bus
- Up to 16 2708's
- Can be initialised for 8K or 16K of address space
- -5V generated on board


\$135

EPROM'S to suit: 1 to 8 \$13.50, 9 to 16 \$12.50



PIA MODULE CMS 9620

- Motorola Bus
- Up to 8 PIA's allowing 128 I/O lines
- Occupies 32 sequential addresses allowing efficient interrupt handling
- \$199 without PIA's (price does not include flatribbon)
- \$260 fully populated
- 6820's — \$7.50



ACIA MODULE CMS 9650

- Motorola Bus
- 8 ACIA's
- RS232 interface on each of the eight channels
- 14 baud rates available

\$350 assembled
\$305 assembled with 2 ACIA's
6850 — \$7.50

SEMCON MICROCOMPUTERS


PO Box 61, Pennant Hills, 2120. Tel (02) 848-0800

Add 15 percent tax where applicable. P&P: \$2.50 Sydney Area. \$3.50 elsewhere

BPF

SCIENTIFIC


CALCULATORS

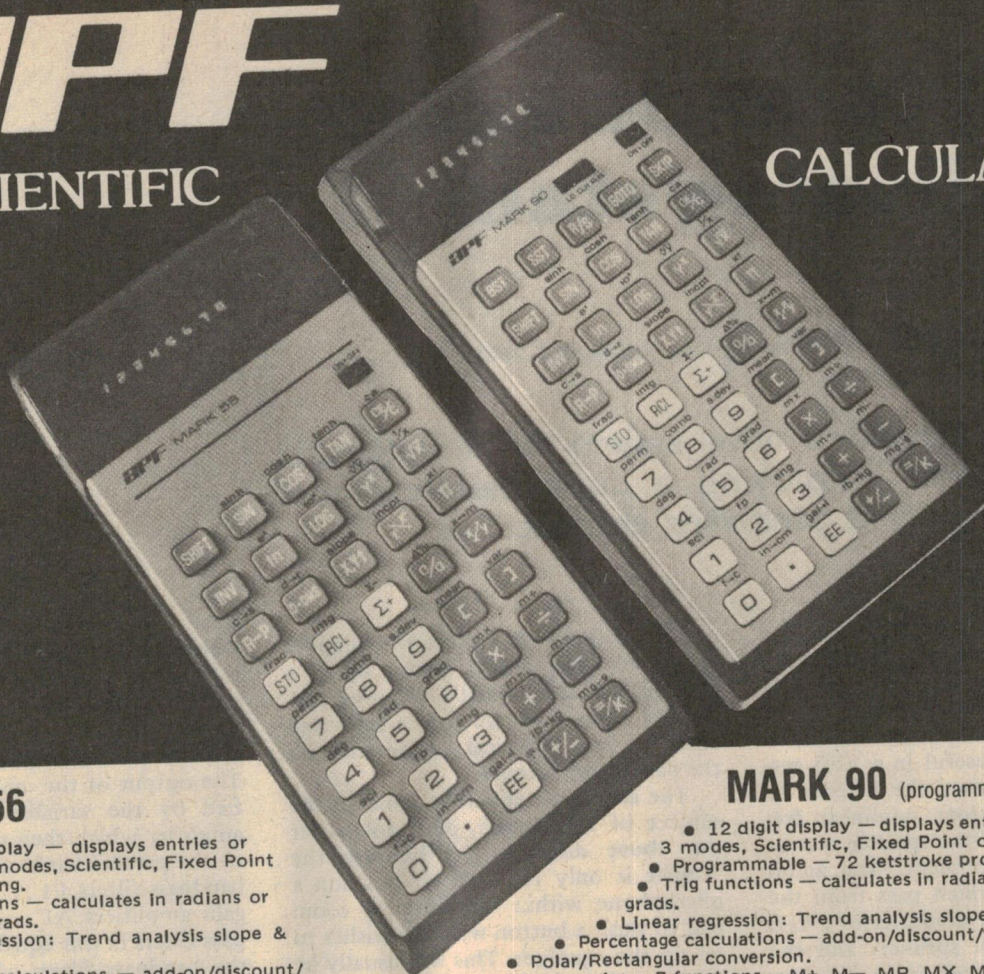

MARK 56

- 12 digit display — displays entries or results in 3 modes, Scientific, Fixed Point or Engineering.
- Trig functions — calculates in radians or degrees or grads.
- Linear regression: Trend analysis slope & intercept.
- Percentage calculations — add-on/discount/yield percentage.
- 10 memories — 7 functions — M+, M-, MR, MX, M÷, Store, MEX.
- 8 metric conversions.
- Operates on rechargeable batteries or AC current (recharger/adaptor incl).
- Dimensions — L 6" x H 1 1/8" x W 3".

\$49.95 incl. tax

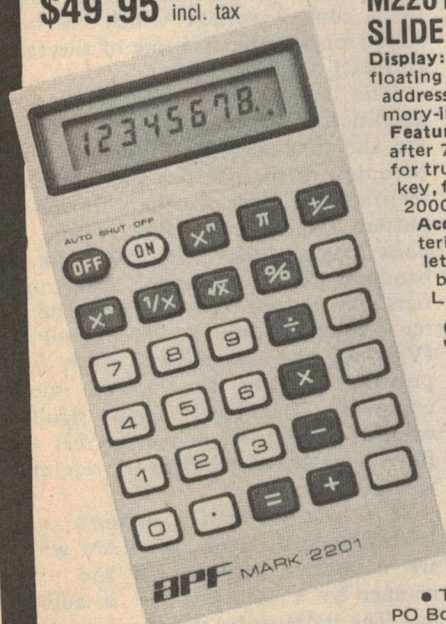

M2201 SLIDE RULE LCD CALCULATOR


Display: 8-digit LCD. **Decimal System:** floating decimal point. **Memory:** fully addressable 4-key memory, memory-in use indicator. **Special Features:** automatic shut-off after 7 minutes, minus indicator for true credit balance, percent key, four functions of x, approx 2000 hours battery life.

Accessories Included: batteries, simulated leather wallet-type case, instruction book. **Dimensions:** 4 1/2" L x 1 1/4" H x 2 1/2" W.

\$21.95 incl. tax

M3550 LCD CALCULATOR

Display: 8-digit LCD. **Decimal System:** floating decimal point. **Memory:** fully addressable 4-key memory, memory-in-use indicator. **Special Features:** timed automatic shut-off of display, true credit balance, square root key, percent key, approx 1000 hours battery life. **Accessories Included:** batteries and simulated leather pouch, instruction book. **Dimensions:** 2 1/8" L x 3/16" H x 3 3/4" W.

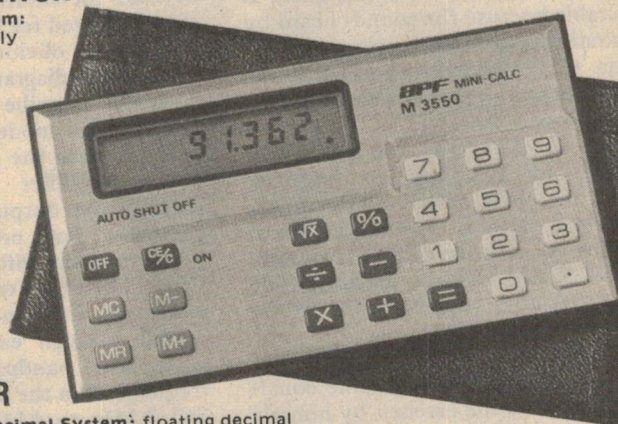

\$19.95 incl. tax

MARK 90 (programmable)

- 12 digit display — displays entries or results in 3 modes, Scientific, Fixed Point or Engineering.
- Programmable — 72 keystroke program storage.
- Trig functions — calculates in radians or degrees or grads.
- Linear regression: Trend analysis slope and intercept.
- Percentage calculations — add-on/discount/yield percentage.
- Polar/Rectangular conversion.
- 10 memories — 7 functions — M+, M-, MR, MX, M÷, Store, MEX.
- Operates on rechargeable batteries or AC current (recharger/adaptor incl).
- Dimensions — L 6" x H 1 1/8" x W 3".

incl. tax **\$65**

• Trade enquiries • 12-month warranty • student tax exemption
PO Box 464C, GPO Melbourne. Calculator Supermarket — new address, 435 Bourke St, Melbourne.

An automatic audio equaliser system

R.J. Carpenter 2/104 Carnegie Cres., Griffith A.C.T. 2603

This article describes a novel system for an automatic audio equaliser employing a dedicated low cost microprocessor as its controlling element.

AN AUTOMATIC audio equaliser has many applications, ranging from domestic hi-fi systems to audio amplification and sound reinforcement systems for auditoriums, concert halls and the like.

An equaliser is useful in a hi-fi system because it allows the listener to overcome the inherent nonlinear frequency response of the speaker system and listening environment. The audio frequency signals which pass from the output of the power amplifier of a hi-fi system, through the speakers and the listening room, are relatively accentuated or attenuated according to the frequency characteristics of the speakers and listening room. The extent of this accentuation and attenuation is measured with respect to a reference level.

The modification of the AF signals by the speakers and listening room is undesirable because the sounds heard by the listener are no longer a close approximation to the sounds recorded at the original musical performance, that is, there is a loss of fidelity.

This loss of fidelity can be largely overcome by coupling an equaliser between the preamplifier and the power amplifier of the hi-fi system. The use of corrective equalisation is discussed more fully by Wally Parsons in his article entitled "What is equalisation?" in the March 1979 issue of ETI.

The most common type of equaliser in this application is the 'graphic equaliser'. This allows the listener, by himself adjusting a multiplicity of controls to "cut" (i.e.: attenuate) those frequencies which would otherwise have been accentuated, and to "boost" (i.e.: accentuate) those which would otherwise have been attenuated. An equaliser of this type is described in the June

1979 ETI (page 28, Project 485 Graphic Equaliser). The proper setting up of a graphic equaliser usually requires specialised equipment (such as a spectrum analyser) and technical competence on the part of the listener.

The automatic equaliser, which is the subject of this article, does not suffer the above disadvantages because the listener is only required to position a microphone within the listening room and to push a button when he wishes to set up the equaliser. This will usually be done infrequently in any case. All subsequent steps are performed automatically by the equaliser without the use of specialised external equipment.

For the purposes of the subsequent description, the hi-fi system will be assumed to be a monophonic system because the additional components and steps required for a stereophonic system will become obvious.

A block diagram is shown in Figure 1. I will describe the setting-up mode first. In this mode the switches S1, S2 and S3 are in the positions shown. The power amplifier of the hi-fi system receives the output of the pink noise generator. Pink noise has equal energy per octave and differs from white noise which has equal energy per unit bandwidth. As an example, if pink noise is passed through each one of two different ideal bandpass filters which pass frequencies in the bands 1 kHz to 2 kHz and 2 kHz to 4 kHz respectively, then the same noise energy is passed by both bandpass filters. Pink noise (and white noise) contains random frequency components at every frequency and this property is useful in setting up an equaliser.

The pink noise is amplified by the

power amplifier which then provides the input to the speakers of the hi-fi system. A high quality microphone is positioned in the listening room to receive the acoustic noise output of the speakers. The output of the microphone is amplified by the variable gain microphone amplifier which then provides the input to the parallel bank of series connected bandpass filters F1...F10 and variable gain amplifiers A1...A10. The bandpass filters in this equaliser are similar to the bandpass filters of a graphic equaliser. Typically, the nominal centre frequencies of the filters F1...F10 are spaced one octave apart at frequencies of 32, 63, 125, 250, 500 Hz, 1, 2, 4, 8 and 16 kHz respectively. The gain of each variable gain amplifier is controlled by a control voltage which has been stored on a respective one of the capacitors C1...C10.

The outputs of the variable gain amplifiers are then summed together in the summing amplifier which provides the input to the rectifier and filter. The rectifier and filter provide a dc voltage output indicative of the amount of noise energy passed by the bank of bandpass filters and variable gain amplifiers. The output of the rectifier and filter is compared with a reference voltage (V_{ref}) by the comparator which then provides a binary input to the microcomputer. This binary input signifies whether the output of the rectifier and filter is greater or less than the reference voltage.

The microcomputer consists of a microprocessor, ROM and RAM which are connected together in the usual manner by a data bus and an address bus. The ROM stores the program of the microcomputer, and the RAM stores the


most recent binary values of the various control voltages of the variable gain amplifiers A1... A10. The various control voltages are applied across the capacitors C1... C10 by the use of the digital to analog converter in conjunction with the analog demultiplexer. The digital to analog (D/A) converter successively receives the binary value of each control voltage from the microcomputer via the data bus. The corresponding successive voltage outputs produced by the D/A converter are demultiplexed by the analog demulti-

plexer to the respective ones of the capacitors C1... C10. from the speakers and the gain of the microphone. The approximate equality is signified by the change in the binary output of the comparator. The gain of the variable gain microphone amplifier is then set at its present value for the remainder of the setting up time. In other respects, the operation and the associated circuitry of the variable gain microphone amplifier may be similar to that of the variable gain amplifiers A1... A10.

Another of the variable gain amplifiers from A1... A10 is then selected,

bandpass filters, F1... F10, and variable gain amplifiers, A1... A10, is coupled between the preamplifier and the power amplifier in a manner which corresponds to the coupling of a graphic equaliser between the preamplifier and the power amplifier of a hi-fi system.

During both the setting up and normal mode of operation, the appropriate control voltages of the variable gain amplifiers A1... A10 are cyclically reapplied across the respective capacitors C1... C10 otherwise the capacitors would eventually lose their charge.

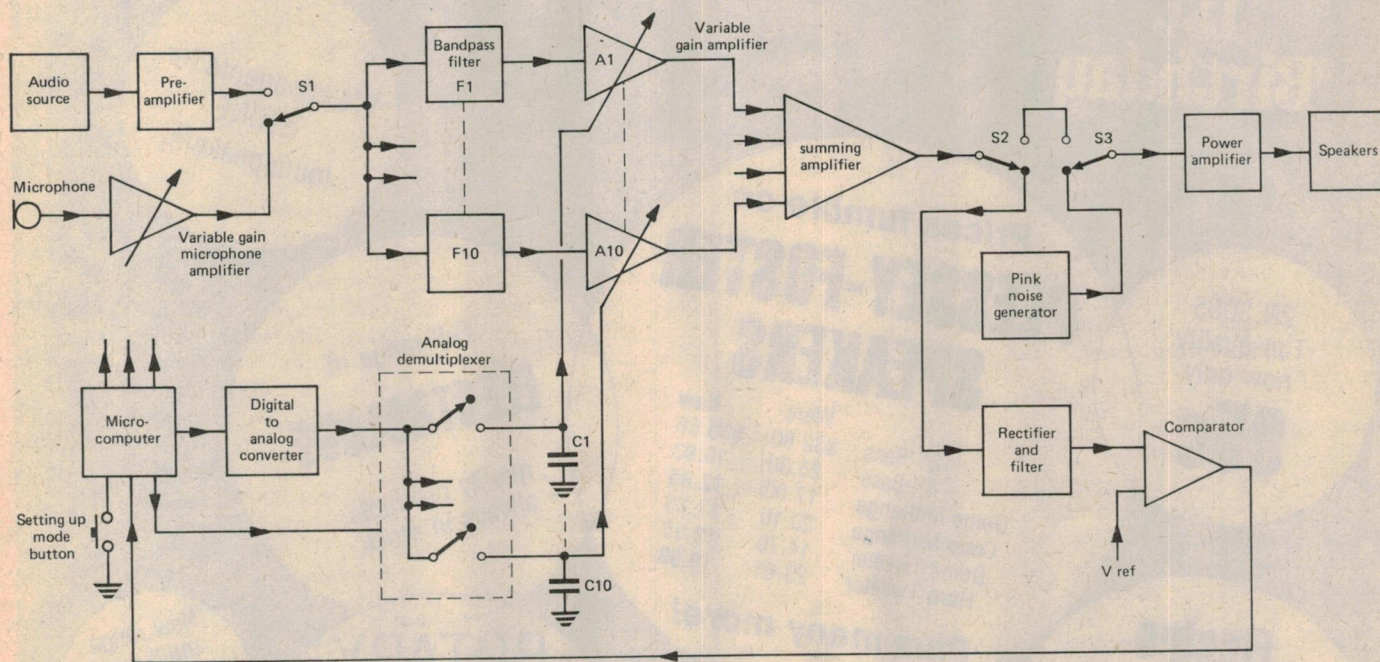

plexer to the respective ones of the capacitors C1... C10.

At the commencement of operation in the setting up mode, and under the control of the microcomputer, the gain of one selected variable gain amplifier from A1... A10 is set to unity. The gains of the other amplifiers are set to their lowest possible values or alternatively, the outputs of these other amplifiers are minimised in some other convenient manner, such that the output of the summing amplifier is predominantly influenced by only the output of the selected variable gain amplifier. This step nearly corresponds to setting one of the control knobs of a graphic equaliser to the 0 dB mark, and setting the other control knobs to the lowest mark (typically -14 dB). Under the control of the microcomputer, the gain of the variable gain microphone amplifier is progressively adjusted until the output of the rectifier and filter is just about equal to the reference voltage V_{ref} . This step takes into account variable factors such as the distance of the microphone

and the outputs of all the other amplifiers (including the first selected amplifier) are minimised as before. The gain of the newly selected one is then progressively adjusted until the output of the rectifier and filter is just about equal to the reference voltage. The corresponding binary value of the control voltage, at the just obtained correct gain of the selected amplifier, is then stored by the microcomputer for future use in the normal mode. The steps mentioned in this paragraph are then repeated for each of the other amplifiers which have not previously been selected. The setting up procedure has now been completed, and the equaliser then enters the normal mode of operation.

At the commencement of operation in the normal mode, and under the control of the microcomputer, all of the variable gain amplifiers A1... A10 are set at their previously obtained correct gains, and the positions of the switches S1, S2 and S3 are changed over. Thus, the parallel bank of series-connected

These capacitors should preferably be low leakage types, and the voltage control inputs of the variable gain amplifiers should preferably be buffered to provide high input impedance so that current drain from the capacitors is minimised.

It is generally inconvenient to set up the equaliser in the above manner for each listening session. However, by selecting low power CMOS RAM as the RAM for the microcomputer, and by providing a rechargeable battery as the backup voltage supply for this type of memory, the microcomputer then has RAM which is effectively non-volatile for long periods of time. Consequently, the equaliser need only be set up once for each change in the listening environment.

An automatic equaliser similar to the equaliser as described above is the subject of an application for a patent by the author. At present, this equaliser is not commercially available, but it may be in the future if it receives commercial backing by a manufacturer.

DAVE RYALL

electronics

**1st
Birthday**

SYDNEY: 982-7500. BRISBANE: 52-8391

*All products top quality
brand names - no
seconds.*

We are agents for
ETONE
loudspeakers.

2N.3055
Top quality
now only

85c

Prices tumble on **PLESSEY-FOSTER SPEAKERS**

	Were	Now
12" Bass	\$32.80	\$30.68
8" Bass	25.00	16.93
Dome Midrange	17.00	12.85
Cone Midrange	20.10	17.56
Dome Tweeter	14.70	12.12
Horn Tweeter	23.61	19.93

Plus many more!

Full range of **ELECTROLUBE**

quality products
always in stock

Electro **SPECIALS**

.47uf 25v R.T.
1uf 25v R.T.
2.2uf 25v R.T.
All one price .05c.

Don't forget
our **LOW, LOW
PRICES** on
1/4 & 1/2 watt resistors.

.04c Singles.
.03c 100 mixed values.
.02c 100 same value.

These prices
include
sales tax.

100
random
value
resistor
packs (1/2 watt)
for only

\$1.00

ROTARY SWITCH SELLOUT

1 pole, 11 position, 90c.
2 pole, 5 position, 90c.
Making room for new range

New range
multi-way
connectors.
15 amp
rating.

3 section **CAR AERIALS**

We're giving them
away for
only **\$3.45**

Full range of **ADCOLA**

soldering
products
always in
stock.



R-1000 RECEIVER* DELIVERS THE SOUNDS OF THE WORLD TO YOU — 'MAGNIFICENTLY'



*Large stocks arriving in Australia shortly.

FEATURES

1. HF general coverage: 200 KHz-30 Mhz SSB/CW, AM.
2. Easy operation for tuning by 1 Mhz step band selector switch and 1 Mhz coverage VFO. A preselector is not equipped.
3. The digital frequency display indicates to 1 KHz and the analogue display indicates to 10 KHz.
4. Built in ceramic filters. AM-wide — 9 KHz (—6db). AM-narrow — 5 KHz (—6db). SSB/CW — 2.7 KHz (—6db).
5. Built in Noise Blanker.
6. RF-ATT: Switchable for 0, 20, 40 and 60 db.
7. Tone control.
8. Switchable antenna terminal: Below 2 Mhz — 1 Kohm. Over 3 Mhz — 50 ohm/1 Kohm switchable.
9. Built in digital x'tal clock. 12 hour indication with AM/PM display by LED. Timer facility for power on and off-will not indicate time while the power is off.
10. Recording terminal with a recorder control terminal which enables the automatic recording with the timer.
11. Mute terminal.
12. Dimmer for LED and lamps.
13. Built in 10 cm speaker. Optional external speaker available.
14. Designed to operate on 100/120/220/240 volt AC power 40/60 hz and 13.8 volt DC (external) power.

TRIO-KENWOOD (AUSTRALIA) PTY. LTD.

31 Whiting Street, Artarmon, Sydney, N.S.W. 2064. Telephone (02) 438-1277

Authorised Distributors:

N.S.W.: SIDE BAND ELECTRONICS SALES (02) 438-4191 — CUSTOM COMMUNICATIONS (02) 635-6399
SIDE BAND ELECTRONICS IMPORTS (047) 51-1394 — EMTRONICS (02) 398-6378 •
VIC.: VICOM IMPORTS PTY LTD (03) 699-6700 • **QLD.:** MITCHELL RADIO CO (07) 57-6830 •
S.A. & N.T.: INTERNATIONAL COMMUNICATIONS SYSTEMS PTY LTD (08) 47-3688 •
W.A.: WILLIS TRADING CO (09) 321-7600 • **TAS.:** ADVANCE ELECTRONICS (003) 31-5688 •

PLUS MANY OTHER REGIONAL OUTLETS THROUGHOUT AUSTRALIA

Call into
your nearest
authorised
distributor
and ask to see
this and other
high performance
Kenwood units

Celef Challenge You!

Celef challenge you to make this convincing test...

Come in to your nearest Celef dealer and ask for a demonstration. The Celef speaker you choose to audition may be on a shelf of 30 speakers.

With most speakers you can locate where the sound is coming from on the shelf. With Celef sound you can accurately locate every instrument and voice... **but we challenge you to locate the speaker the sound is coming from.**

Celef Mini Professional SM.

One of Britain's most sought after loudspeakers. Selected as "Best Buy" by Britain's Angus McKensie of Choice Magazine. Unbelievable 2-way design performance.

Celef Domestic Loudspeaker

A new standard in "under \$500" speakers. Superb natural and open sound with low distortion in a compact book-shelf style speaker enclosure.

Celef PE-1 Loudspeaker

This outstanding top of the series speaker features a unique Piezo Electric Super Tweeter that produces superb natural sound even with such complex instrument sounds such as violins and cymbals.

The Celef PE-1 was selected from about thirty of the best British, European & American loudspeakers to be installed in the Royal Opera House, Covent Garden because of their accuracy, high output and compact size.


Celef Loudspeakers. A new Dimension in Audio Accuracy & Open Uncoloured Sound.

In your own listening room this unique quality of Celef's more open and accurate sound means the music virtually flows around you. Celef music becomes "alive" with a depth, realism and richness that has taken the British Hi Fi Industry by storm.

Celef's great efficiency means effortless sound even with amplifiers of moderate power — but Celef's power handling is higher than most British speakers allowing you to employ the best of today's high output amplifiers.

Now these acclaimed speakers are available in Australia from \$468 per pair.

British Celef. It is more than a new name in loudspeakers... it is a new standard in quality & value.

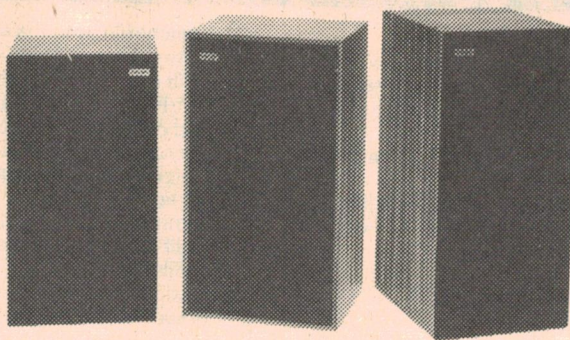

New 1979 release.
Top of the range, R.T.1
An intriguing new 3-way
design including the Kelly
Horn loaded Ribbon Tweeter.

Celef Monitor Loudspeakers

The Celef Monitor has got to be one of the best \$500 a pair loudspeakers available in Australia.

Its almost clinical accuracy would make it ideal for an audiophile with a small listening room, a small budget but big sound ideas.

Stereo Buyers Guide.
(Speakers) Magazine 1977

Sole Australian Agents

ATENA
DISTRIBUTORS

Australasia Pty. Ltd.

Telex: 93299 Phone: (09) 361 5422

Authorised Dealers:

- Sydney** — Riverina Hi Fi, Arrow Elec Allied Hi Fi, Springwood Hi Fi
- Melbourne** — Natsound, Tivoli Hi Fi, Steve Bennett (Geelong)
- Adelaide** — Grenfell Hi Fi, Sound Dynamics, Aslin Hi Fi (Gambier)
- Brisbane** — Stereo Supplies
- Perth** — Alberts Hi Fi, Leonards Hi Fi

After you experience our equalizer at work, unequalized sound just won't seem like music anymore!

1 Bad rooms become good rooms
The listening room is the final link in the audio chain. It determines, as much as any component, the sound that will reach your ears. Most homes are designed for comfort, not for acoustics. An equalizer can let you have it both ways by transforming a comfortable living room into an excellent listening room.

2 Good speakers become great speakers
An equalizer can improve speaker balance and ideally blend, according to your taste, the character of your speaker with the character of your room — thus your speaker performance is greatly improved.

3 Highlight an instrument
A musical instrument, a band of instruments, or a vocalist can be emphasised on a recording to aid in learning a specific tune or admire and enjoy the playing of a particular instrument.

4 Optimise system balance
An equalizer will be able to eliminate any incompatibility between your cartridge/pre amp combination and your speakers by levelling any of the peaks or dips.


5 Improve source material (records etc)
An equalizer can upgrade the sound of your source material by reducing record rumble and surface noise, hushing tape hiss and stiffling radio static.

6 Improve your recording
Get professional quality effects by shaping the sound of the program material to achieve the results that you want on tape.

7 Make you own music
Listen to the music the way you want to hear it — not the way the recording engineer felt like hearing it when he mixed it down. Bring up the vocals or fade the guitar. It's your choice. An equalizer can make music anyway you want to hear it.

An equalizer is the final component, the catalyst which will tune today's advanced components to each other, to your room and most importantly, tune the music to your ears.

3 year parts and labour warranty.
Available in anodized black or brushed aluminium

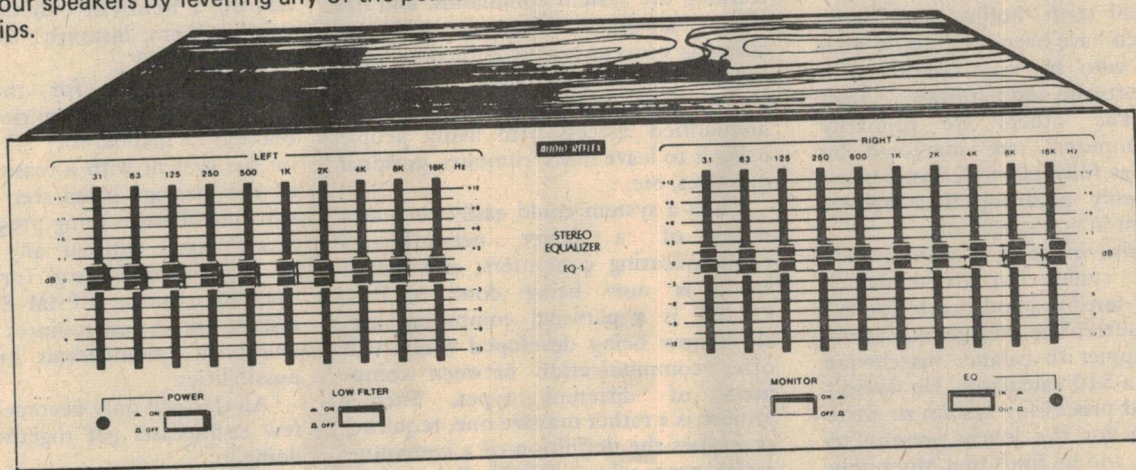


What the critics say

HI-FI & MUSIC, May 1979 — "The Audio Reflex equalizer has been carefully designed for general use in systems owned by audiophiles who require that 'something extra' in hi-fi systems."

CANADIAN STEREO GUIDE, Winter 1979 — "Separation between the two channels was excellent, being better than — 64dB across the range. THD was also exceptionally low, as was equipment generated noise."

THE FM GUIDE (Canadian) 1979 — "Quality, that was only hinted at with the original material, can be brought out through proper use of this well-designed, modestly priced, and simple-to-operate frequency equalizer."

(Copies of full reviews available upon request.)

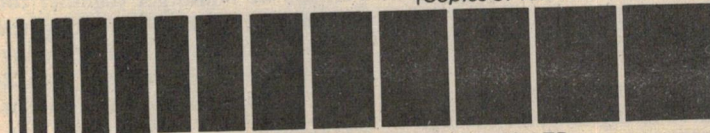

Australian Distributor: **Audio Reflex (AUSTRALIA) PTY. LTD.**

●SYDNEY

7 Orchard Road, Brookvale 2100
(P.O. Box 208, Brookvale 2100)
Telephone: (02) 938 4188

●N.S.W.

NEWCASTLE (049) 69 2733
WOLLONGONG (042) 29 3762

●INTERSTATE

MELBOURNE (03) 89 9137
BRISBANE (07) 284 7685
ADELAIDE (08) 264 6984
PERTH (09) 321 6865
LAUNCESTON (003) 31 7188

AUDIO REFLEX

You'll hear more from us

Thoughts on doing something with a microcomputer

So you've had your micro for some time now, have figured out its little quirks and can play Star Wars or Inspector Cluseau — where do you go from here?

Les Bell

THERE MUST BE many hobbyists out there who are in much the same situation I am — built up a computer over a period of time just to learn more about it, had a lot of fun doing it, but the flaming thing still doesn't *do* anything.

It really is a genuine and honourable computer and really can solve mathematical problems and play games, but it just isn't working for its living. It's been great fun and intellectual satisfaction writing programs which, in turn, make it easier to write other programs but frankly, I'm looking around for a big project to get my teeth into.

Looking at the current state of the microcomputer industry several interesting points are evident. First of all, it is possible to draw a line between two types of computers and the hobbyists who own them. Many are what I shall term 'hobby' computers. Those which have been built up by their owners — who are very familiar with both the software and hardware of their systems. The others are primarily 'home' computers, are marketed by companies as fully assembled and tested products, only requiring their owners to plug them in and switch on.

At the risk of being labelled a died-in-the-wool cynic, I'm afraid that I can't see a terribly good future for the home computer. The average man in the street is happier to balance his cheque book with a \$10 calculator. He doesn't need a word processing system to write 'Thank you for the lovely present' to Auntie Flo, and he finds that Monopoly is just as much fun for the kids as 'Star Trek' on the TRS-80 (and cheaper).

In short, virtually all of the average man's activities in his personal life would be hindered, rather than helped, by a personal computer.

There are, of course, exceptions to every rule and this is no exception. But, most are too specialized for home computers to sell in reasonable quantities and software for such applications will be expensive.

Several unrelated developments in the hobby computer scene may offer a way round this, however. First is the

availability, in the US, of modem boards for microcomputers.

PCNET and similar

It often seems that a lot of interesting computer applications are open to US hobbyists that just aren't possible here. Perhaps the prime example of this is the easy access to data transmission facilities US computer hobbyists enjoy, using modems or acoustic couplers. This has led to the development of several interesting projects. For example'

In Chicago Ward Christensen and Randy Suess, of the Chicago Area Computer Hobbyists' Exchange, have implemented what they call the Computerized Hobbyist Bulletin Board System. This system allows people with modems to call in and leave or retrieve messages. It is highly interactive, offering first-time users assistance in learning the system commands, and has many ancillary features, such as allowing users to leave comments on the system when they sign off.

The system has proved to be an unqualified success with many people using it to leave news, rumours, personal messages, etc.

Such a system could easily become a node of a larger network of communicating computers, and indeed work is now being done on this. PCNET is a personal computing network now being developed which will offer communication between computers of different types. Such a project is a rather massive one, requiring as it does the definition of a communication protocol which will allow widely different computers to talk to each other.

Now, mull these ideas over for a few minutes. Ask yourself what you are doing with your computer, or what you would do if you had one.

An integral part of amateur radio is the ability to communicate with fellow enthusiasts; computer hobbyists would benefit tremendously from the same facility.

In the UK, information is now being distributed in digital form through the Prestel (Viewdata) system, and the Teletext scheme, which inserts digital

information into the TV signal. A similar system will soon be operational in Australia.

Although the pages of information in these systems are no doubt copyright, and copying them into the memory of your computer may well infringe that copyright, there is no technical reason why the operators of these services could not supply computer programs and/or data to be used in programs.

This opens up a wide range of possibilities for the home computer.

Imagine being able to leave messages for your friends, even when they are not at home. Imagine being able to compose long letters at your leisure, using your system's text editor, and then instantly send them to their destination, by phone, not mail (often cheaper). How about placing 'for sale' ads on a hobbyist bulletin board, and remove them, instantly, as soon as the items are sold?

Best of all, for the computer hobbyist, general enquiries (does anyone have a manual for ...) could be left on the system with a reasonable chance of the message being seen by someone who could help. Long programs can be interchanged without any dependence on physical media (e.g. Tarbell cassette, TRS-80 cassette, CP½M 8" disk), for instant use. A few minutes thought will reveal a tremendous number of possibilities.

All this will only become possible if a few enthusiasts get together and start doing it.

With this in mind, I am interested in hearing from other enthusiasts who are as intrigued as I am with the communications potential of their computer, with a view to seeing what can be done in this area within the constraints imposed by Telecom and the different computers involved. Perhaps we could get together for some preliminary discussions, along the lines of our Synergistic Beer Drinking. Any suggestions? Write to me, Les Bell, at ETI, 15 Boundary Street, Rushcutters Bay, NSW 2011, and we'll see what develops.

Watch this space for more news.

Introducing the 'Versatile' computer.

Top of its
class



Versatile 4 \$5900*

Integral printer \$1150*

At last a computer that easily adapts to your requirements without being 'strung together'. A computer that is suitable for either business, scientific, educational, or industrial applications. Based on the ever popular S100 bus, it features an **INTEL 8085** processor, 32K of static **RAM**, and twin **Micropolis** drives giving an amazing 630K bytes of storage. With an interface capable of handling two more drives, imagine what you can do with 1.2M **BYTES**!

Software is a vital part of any computer, consequently each machine comes with **MDOS** (Disk Operating System), **Extended Basic**, **Text**


Editor, **8085 Assembler**, Utility routines, a sample **Business pak**, and several **Games**. You won't have to wait to get the '**Versatile**' up and running; **Everything is supplied!** We also have available **CP/M**, **BEM** (a basic Expansion Module), **Mailing List**, and a complete set of **Business Programs designed for Australia!**

We even custom design software and hardware to your requirements.

The **Integral Printer** shown comes loaded with features that others may only be able to offer as options: **Graphics**, **Enhanced Characters** variable

Characters per line, selectable **Form Length**, and **more**.

If you need a computer, go to the top of the class. '**Versatile**'. Available only from:



MICROPROCESSOR APPLICATIONS

Maskells Hill Road
Selby, 3159 Australia

(03) 754-5108

'Small computers solving large problems'.
*Plus sales tax if applicable.

OVERLOAD 42

electronics today
INTERNATIONAL

BINDERS
HOLDS 12
COPIES OF
eti



Protect and file your back issues of **Electronics Today** with these attractive binders. Price: \$4.50 plus postage and packing (80c NSW, \$1.70 other states).

SUBSCRIPTION DEPARTMENT

ELECTRONICS TODAY INTERNATIONAL
MODERN MAGAZINES (HOLDINGS) LTD.,
15 BOUNDARY ST., RUSHCUTTERS BAY, 2011

electronics today
INTERNATIONAL

Synergistic
Beer
Drinking



On the second Wednesday of each month, the **ETI** staff and readers meet at the **Bayswater Hotel**, in **Bayswater Road**, **Rushcutters Bay**, (just up from the **Rushcutter Bowl**) to discuss electronics (or anything) over a few beers. Why don't you come along?

You'll like this value!




► 7" x 1800 Reel-to-reel 3.99

for 48-hour COD delivery to Sydney metropolitan area . . . north to Gosford . . . south to Wollongong . . . west to Katoomba . . . for only \$2 or pick up your order.

POST to Dindy Marketing (Aust) Pty Ltd
PO Box 55, 5th Floor,
15-19 Boundary Street,
Rushcutters Bay, NSW 2011.


Delivery & Insurance	\$2.00
Enclosed TOTAL	

Signature _____



Hioki

Dependable Multitesters

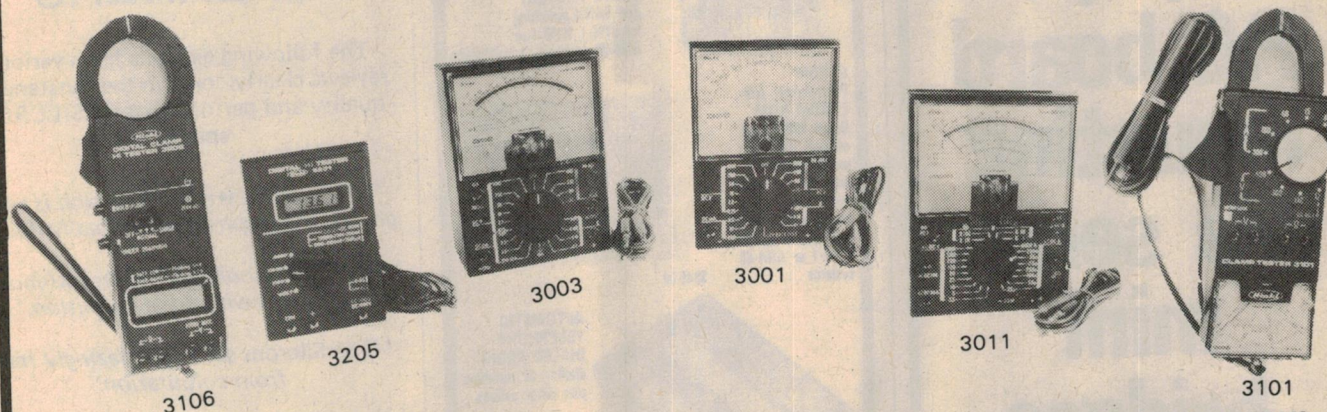

BRIEF SPECIFICATIONS FOR SOME POPULAR MODELS FROM THE EXTENSIVE HIOKI RANGE OF TAUT BAND ANALOGUE AND DIGITAL INSTRUMENTS

SPECIFICATIONS

3001 TESTER FOR APPLIANCES AND GENERAL HOUSEHOLD
 0.25/2.5/10/50/250/1000V DC $2k\Omega/V \pm 3\%$
 0.5/10/250mA DC $\pm 3\%$
 10/50/250/1000V AC $2k\Omega/V \pm 3\%$
 3k/30k/300k $\pm 3\%$ F.S. R.C. 26Ω

3002 PRACTICAL COMPACT TESTER
 0.5/2.5/10/50/250/1000V DC $20k\Omega/V \pm 3\%$
 50 A/25/250mA $\pm 3\%$
 10/50/250/500/1000V AC $9k\Omega/V \pm 3\%$
 10k/100k/1M $\pm 3\%$ F.S. R.C. 100Ω
 L.F. Output —20 to +36dB $\pm 4\%$

3003 PRACTICAL MEDIUM CLASS TESTER
 0.25/2.5/10/50/250/1000V DC $30k\Omega/V \pm 3\%$
 50A/2.5/25/250mA/10A DC $\pm 3\%$
 10/50/250/1000V AC $13.5k\Omega/V \pm 3\%$
 10A AC $\pm 4\%$
 5k/50k/500k/5M $\pm 3\%$ F.S. R.C. 50Ω
 L.F. Output —20 to +36dB $\pm 4\%$

3005 HIGH CLASS TESTER WITH RELAY PROTECTION
 0.25/1/2.5/10/50/250/1000V DC $50k\Omega/V \pm 3\%$
 50uA/2.5/5/50/500mA/10A DC $\pm 3\%$
 10/50/250/1000V AC $10k\Omega/V \pm 3\%$
 10A AC $\pm 4\%$
 2k/20k/200k/2M $\pm 3\%$ F.S. R.C. 20Ω
 L.F. Output —20 to +36dB

3010 HIGH SENSITIVITY (10μ A OPERATING CURRENT) TESTER WITH RELAY PROTECTION
 0.1/1/2.5/10/50/250/500/1000V DC $1000k\Omega/V \pm 3\%$
 10 A/100 μ A/1/10/100/500mA/10A $\pm 3\%$
 10/50/250/500/1000V AC $10k\Omega/V \pm 3\%$
 10A AC $\pm 4\%$
 2k/200k/2M/20M $\pm 3\%$ F.S. R.C. 20Ω
 L.F. Output —20 to +36dB

3011 HIGH CLASS WIDE RANGE TESTER FEATURING ELECTRONIC RELAY PROTECTION
 2.5/5/10/25/50/100/250/500/1000V DC $40k\Omega/V \pm 2\%$
 25 μ /50 μ /100 μ /250/2.5m/25m/250m/2.5A/10A DC $\pm 2\%$
 2.5/5/10/25/50/100/250/500/1000V AC $10k\Omega/V \pm 3\%$
 25 μ /50 μ /100 μ /250 μ /2.5m/25m/250mA/2.5A/10A AC $\pm 3\%$
 3k/30k/300k/3M $\pm 2\%$ F.S. R.C. 20Ω
 L.F. Output —20 to +36dB

3205 DIGITAL MULTITESTER SEMI AUTO RANGING WITH FE-LIQUID CRYSTAL DISPLAY AND HIGH ACCURACY
 DC V 0-200mV/2000mV/20V/200V/1000V $10M\Omega$
 AC V 0-200mV/2000mV/20V/200V/1000V $10M\Omega$
 Ω 0-200/2000/20k/200k/2M/20M
 DC A 0-200 μ A/2000 μ A/20mA/200mA
 AC A 0-200 μ A/2000 μ A/20mA/200mA

3101 CLAMP TESTER WITH CONVENIENT METER LOCK
 6/15/60/150/300A AC $\pm 4\%$
 150/300/600V AC $2k\Omega/V \pm 3\%$
 0-1k Ω (Centre 30Ω) $\pm 3\%$ F.S.

3206 DIGITAL CLAMP TESTER TO 1000A AND FE-LCD FEATURES READING HOLD FACILITY AND SURGE HOLD FOR MOTOR START READINGS. SPECIAL 0-20A RANGE PROVIDES 0.01A RESOLUTION.
 AC A 0-19.99 (Push Button) 0-199.9/1000A (Auto)
 Surge Current 0-1000A
 AC V 0-199.9V/1000V (Auto)
 Surge Voltage 0-1000V
 0-199.9/1999 Ω (Auto)

A WIDE RANGE OF OPTIONAL ACCESSORIES ALSO AVAILABLE.

Hioki Multitesters are available through your favourite stockist or electrical wholesaler. If he does not have the model of your choice ask him to order it for you. For further information contact:—


H. ROWE

& CO. PTY. LTD.

(Sole Australian Agents)

Melbourne 328 6511;
 Sydney 601 6600; Brisbane 52 5231;
 Perth 446 6622 Adelaide 46 6411;


CEMA introduces the popular P.C. board mounting WO series mini bridges

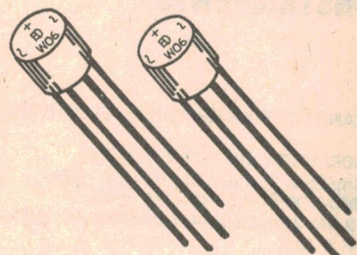

Prices		1-24	25-99	100-499
WO-05 1.5 AMP	50V	.79	.67	.50
-2	200V	.84	.71	.52
-4	400V	.89	.75	.56
-6	600V	.97	.82	.61

+ tax if applicable

Plus \$2 — packaging and freight charge per order Prices subject to change without notice.

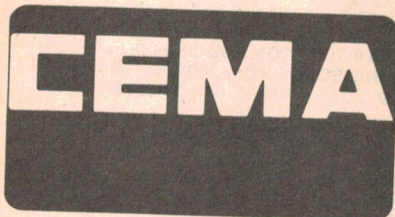


CEMA ELECTRONICS PTY LTD

Sydney 21 Chandos Street,
St. Leonards. 439-4655
Melbourne 208 Whitehorse Road,
Blackburn, Vic. 877-5311
Brisbane 22 Ross Street, Newstead, Qld.
52-4261
Adelaide 170 Sturt Street, Adelaide, S.A.
51-6483
New Zealand 7-9 Kirk Street, Grey Lynn,
Auckland. 76-1169



AGENTS
Canberra
Wollongong
New Guinea
Ortex (062) 82-4995
Macelec (042) 29-1455
Dallron Electronics, Boroko 25-6616
and soon in Perth and Wellington, N.Z.

SYN-1 Single Board Computer . \$210.00
KTM-2 CRT/TV Keyboard terminal module . \$349.00
BAS-1 8K BASIC ROM for SYN-1 . \$149.00
BUFFERED MOTHERboard for SYN-1, KIM-1 or AIM-65 systems . \$179.00





16K-8 fully tested memory board WRITE PROTECT and BANK switching for SYN-1, KIM-1 or AIM-65 systems . \$360.00

EPROM Programmer and EPROM/ROM Board MEMORY mapped EPROM programming will program up to 16K per command firmware in PROM included. For SYN-1, KIM-1 or AIM-65 systems . \$345.00




PRESETABLE COUNTER 5 digits suitable for counting, batching and numerical control . \$150.00

AUTOMATIC TELEPHONE DIALER PROM dialling 32 numbers plus other options . \$180.00




DIGITAL TACHOMETER \$120.00

STEPPING MOTORS wide range for N.C. Control, Plotters, Variable speed, Servo Control etc. From . \$49.50



STEPPING MOTOR DRIVING CIRCUITS for 3 or 4 phase in Mode 1 phase 2 phase 1-2 phase excitation. From . \$12.00

THUMB WHEEL SWITCHES — \$2.20ea.
PROXIMITY TRANSDUCERS — \$15.00ea.



Mail orders add \$3.50 for postage and packaging

G.C.S.

67 Blackshaw Avenue,
MORTDALE 2223.
Telephone: 570 1225
(Trade enquiries invited)

SENSATIONAL SILCRON SPEAKERS

The following extracts from various reviews clearly confirm the outstanding quality and performance of SILCRON speakers.

'The frequency response graph is very good — the graph is exceptionally linear.'

'The bass response appeared extended and tight with good definition.'

'The Silcrons seemed amazingly free from colouration.'

'Total Harmonic Distortions are very low.'

'Individual instrumental sounds were reproduced quite accurately and clearly.'

'The pleasant appearance, solid construction and general refinement of the Silcrons make them a rewarding domestic speaker system — they are extremely good value.'

Priced from a low \$159.00 per pair to \$618.00 per pair — most people can afford to up-grade to SILCRON.



MODEL A.S. 34
You can expect to pay approx \$485 pair.

SILCRON

Distributed by:


D.R. INDUSTRIES PTY. LTD.
PO Box 204,
MOORABBIN, 3189
Phone: 95-9227

BOOK REVIEW

Computer Programming in BASIC

Written by Peter Bishop

Head of Computer Studies,
Denes High School, Lowestoft UK
Published by Thomas Nelson & Sons, UK
Review copy from
Thomas Nelson Aust. Pty Ltd
89-97 Jones St, Ultimo NSW 2007

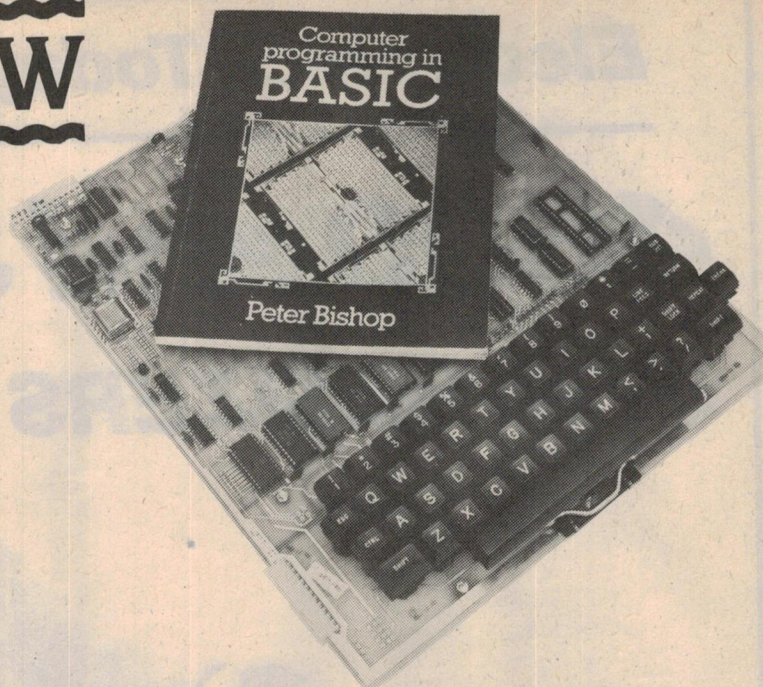

Les Bell

THERE ARE SO MANY books already on the market covering BASIC programming that any new book would have to have some kind of novel twist to achieve any kind of popularity. This book has such a twist, as it is intended mainly for British school pupils sitting an O level or CSE (Certificate of Secondary Education) in Computer Studies. This will almost guarantee the book a market in Britain, but in the rest of the world it will have to stand or fall on its merits.

The treatment is based almost entirely on worked examples, questions and projects, and this is the way it should be. In the reviewer's opinion, there is only one way to learn programming and that is by programming.


In 140 pages, the author covers a useful subset of the BASIC language, with only a few notable omissions, the major one being the absence of any examples of string handling. The reasons for this are not hard to deduce: the dialect of BASIC used in the book is run on an ICL 1900, and it is in this area that inter-machine translation difficulties would probably start to make themselves felt.

This probably gives rise to the other 'quirk' in the book — repeated references to punched cards. To the reviewer, this is almost as anachronistic as referring to stone tablets as an I/O medium, and will intrigue the majority of microcomputer-oriented readers of the book, nevertheless it does not

detract from the value of the book for teaching.


The accent of the book is on number-crunching, particularly for commercial applications, with some material on sorting. The projects are particularly interesting, leading the student into some backwaters of computer science such as queuing theory and computer art. This part of the book could have been expanded a bit perhaps, to include a more formal introduction to these topics for more advanced (or just plain curious) students.

Notable omissions: a bibliography or any form of index. But otherwise, this is an excellent book for the student who has access to a computer and wants to teach himself BASIC.



CONTINENTAL SPECIALTIES CORPORATION

DIGITAL PULSER DP1

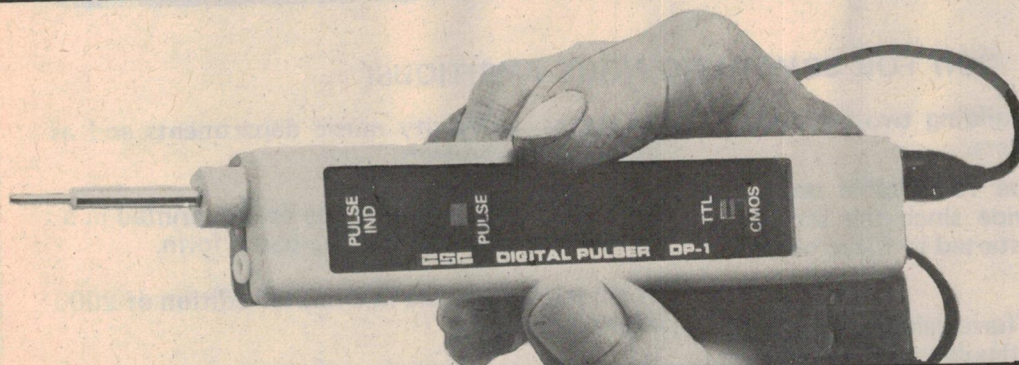

- Automatic polarity sensing delivers pulse of opposite polarity.
- Single pulse or 100 pps train.
- Sink or source 100 mA.
- LED indicator.
- TTL, DTL, CMOS logic.
- Complete with power lead.
- Max current draw 30 mA even when driving a short circuit.
- Weighs only 85 gm.



GENERAL ELECTRONIC SERVICES PTY. LTD.
99 Alexander Street, Crows Nest, NSW. 2065.
Phone: 439-2488, 439-2399. Cables: SERVO SYDNEY.
Telex: 25486 A/B SERVO.

Adelaide: 42-6655.
Canberra: 80-4654, 82-3581.
Brisbane: 277-4311.
Melbourne: 598-9207, 598-5622.
Newcastle: 69-1625.
Perth: 325-5722.

Electronics Today International

4600 and 3600 SYNTHESIZERS



NOW FOR SOMETHING MORE AMBITIOUS!

Here are full plans for building two full-scale electronic music synthesizers.

Many thousands of these remarkable units have been built world-wide since the series of constructional articles started in *Electronics Today* late in 1973.

Since then, the two units have gained a reputation as being among the most flexible and versatile of electronic instruments available.

They have been built as school and university group projects, by recording studios, professional

musicians, university music departments and as home hobby projects.

Here, the complete series has been reprinted in a completely corrected and up-dated form.

The book is available in a limited edition of 2000 copies only.

ENSURE YOUR COPY NOW!

Send \$12.50 to Electronics Today International,
15 Boundary Street, Rushcutters Bay NSW, 2011.

NOTHING EVEN COMES CLOSE

JBL

PROFESSIONAL SERIES



MODEL 4350 STUDIO MONITOR

Designed for BI amplification each enclosure consists of two 15" low frequency loudspeakers, a 12" mid-range loudspeaker, a high frequency driver with horn and acoustic lens, and an ultra high frequency transducer. The 4350 represents the ultimate in accuracy of sound reproduction.

\$7,200 PR

Including electronic crossover

For details and demonstrations visit us
THE PROFESSIONALS IN JBL

insound

PTY. LTD.

108 WEST ST., CROWS NEST
929 2714 92 1498

SPECIALISTS IN HOME INSTALLATIONS
AND BUILT-IN SOUND SYSTEMS

PLESSEY COMPONENTS

Australian distributors
for

MALLORY

- Electrolytic Capacitors
- Computer Grade Photoflash
- Duals Triples Quads
- TAS Tantalums
- Sonalert Audio Alarms
- Slide Potentiometers

GENERAL COMPONENTS Stocks held of . . .

Connectors
Rotary Switches
Lever Keys
Reed Relays
Neon Lamps
Panel Lamps
Switches
Potentiometers
Integrated Circuits
Sonalert Devices
Indicator Tubes
Photodiodes
Photo Voltaic Cells
Nickel Cadmium Batteries
Loudspeakers

Try us for hard-to-get
components such as:-

SILVER MICA
TRANSMISSION MICA
TRANSMISSION CERAMICS
COMPUTER GRADE ELECTROLYTICS



PLESSEY COMPONENTS

PO Box 2 Villawood, NSW. 2163
Telephone 72-0133

Adelaide 269-2544 • Melbourne 329-0044
Brisbane 36-1277 • Perth 458-7111


— PTY. LTD —
DEL SOUND
BRISBANE

CLIFF INSTRUMENT CONTROL KNOBS

This is a versatile range of knobs of an extremely pleasing and practical design, which will enhance the presentation of any instrument on which it is fitted. The knobs are manufactured to very high standards of finish in order to satisfy the most exacting requirements of the professional user.

All knobs are moulded in nylon and available in black, grey or white. Some styles have a smart machined aluminium cap, others have either chrome or coloured anodised caps. A marker dot is available on some models.

The knobs are designed to fit a range of shaft sizes, as quoted, other sizes are designed to special order, for push-on or grub screw fixing. The grub screws are designed such that the screw fits into a tapped hole in an internal aluminium collar to ensure reliability and strength.

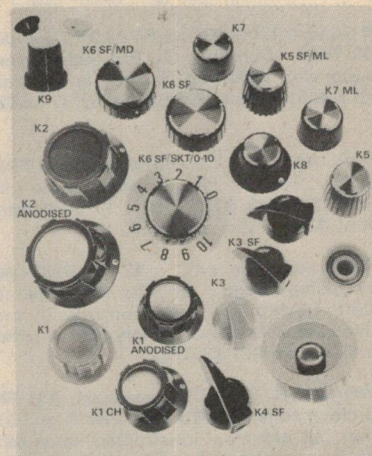

For further information, local agents and
wholesale prices, write to the Australian
Importers:

DELSOUND PTY. LTD.
1 Wickham Tce. (Cnr. Wharf St.)
Brisbane. Phone 229-6155.
Wholesale and Retail suppliers of
Electronic Hardware and
Components.

MINI-MART

● ● ● ● ● ● ● ● ● ● Where you can advertise FOR SALE/WANTED/SWAP/JOIN ● ● ● ● ● ● ● ● ● ●

WE'LL PUBLISH up to 24 words (maximum) totally free of charge for you, or your club or association. Copy must be with us by the 1st of the month preceding the month of issue. Please, please write or preferably type your adverts clearly — otherwise it may not turn out as you intended! If we can't understand it, relatively few readers will (no insult intended). Every effort will be made to publish all adverts received — however, no responsibility for so doing is accepted or implied.

Conditions

Name and address plus phone number (if required) must be included within the 24 words allowed. Reasonable abbreviations, such as 25 Wrms or 240 Vac, count as one word. **Private adverts only** will be accepted. Please let us know if you find a commercial enterprise using this service. Adverts must relate to electronics, audio, communications, computing etc — general adverts cannot be accepted.

Send your ad to:-

ETI Mini-Mart,
Modern Magazines
15 Boundary St
RUSHCUTTERS BAY NSW 2011

AUDIO

SELL endless cassette reproducer units switch or pulse start solenoid engaged pinch roller. Electronic cueing O/p 3W AF 12 VDC 350 mA. H Banninger, 2 Camp St, Wodonga, Vic 3690. Tel (060) 24.3938.

PICKUP arm, Decca International with Supex lifter. Sell \$40. Sydney 85.6098, ask for Chris.

LINN Sondek LP12, Grace G707 MkII, Supex SD900 \$595. Dahlquist DQ10 Loudspeakers, professionally modified mirror image pair, superb sound \$1350. Brisbane (07) 371.5020 AH.

WHARFDALE 15" CS in polished sand filled enclosure. Ditto 8" AL in open baffle plus crossover network \$125 ONO, 13 Serpentine St, Mont Albert, Vic. 89.5328.

STEREO amp for sale: 12 W RMS per channel using Sinclair modules with separate pre-built preamp and tone controls, in presentable case C/W power supply \$50 or offer. Roger Harrison (02) 33.4282.

PLAYMASTER - 75L 80W speakers, AM FM stereo clock tuner, 40/40 amplifier & graphic equaliser, all expertly constructed, must sell, all offers considered & will sell separately. Ring Leon (062) 54.2662 AH (ACT).

PLAYMASTER 40/40 for sale. Speaker protection professionally constructed \$120. Realistic TM-800 AM-FM tuner 12 months old \$120. Sony TC-188SD cassette deck \$250. J Pitman (08) 45.4372.

COMMUNICATIONS

WANTED good used CB around \$20-\$40, prefer hand held. Contact A Francis, 21 Bream St, Coogee, NSW 2034.

MARCONI AM/FM signal generator TF995A/2 220 MHz \$200 or swap good CRO Cambridge portable milivolt potentiometer recond \$200. Phone John (02) 521.4768 AH.

SHORTWAVE listeners: Australia's National Southern Cross DX Club welcomes new members. Write for sample bulletin to George Kuznecovs, 87 Cashel Street, Pasadena, Adelaide, SA 5042.

WANTED: Circuit diagram, construction details for external BFO to suit allwave receiver. J Crichton, 4 Howard Court, Waverley Road, Coolbellup, WA 6163.

TELETYPE station: Model 15 printer ST6 demodulator, loop supply active filter TD14 tape distributor. All excellent condition Caloundra (071) 91.1172. Price complete at cost \$190.

WANTED: ASR33 teletype, preferably with paper tape reader and punch, particulars to G Rand, 185 Tarleton Street, Devonport, Tas or phone (004) 27.8992.

AUSTRALIAN Radio DX Club, for shortwave, and mediumwave DXers. Monthly magazine published write for details with 30 cent stamp to PO Box 67, Highett, Vic 3190 or PO Box 79, Narrabeen, NSW 2101.

COMPUTING

2650 computer system, fully operational, with - 4k, EA VDU, cassette interface, keyboard - software includes, Microbasic Editors, plus hosts of games. \$300 ONO. Call Eric on (02) 90.2577.

MICROPOLIS disk drive for sale. S-100 controller, double density (143k). Software - BASIC, editor, assembler, DG640 driver plus more. \$800 value for \$650. S Dennis, 9 Immarna Place, Dundas (02) 630.5552.

FOR sale: TRS-80 or Exidy 16k memory expansion, new, 250 ns, Mostek chips, \$75/16k. Graham, 4 Pryton Court, Balwyn 3103, tel: AH (03) 89.6918.

TRS-80 programme required. Level 2, 16k. Payroll suitable for use in large hotel. Have for sale or swap advanced job costing and technician productivity programme. PO Box 533, Albury, NSW 2640.

TRS-80 Micro. Level 1 BASIC. 4k RAM. 3 months old. Selling complete. \$650 ONO. Contact Dru Booker, 33 Ashburner St, Higgins, ACT. Phone (062) 54.5657.

WANTED: Disassembled listing of TRS-80 level II, with comments if possible. Richard Lyons, 523 Beatty Road, Acacia Ridge, Brisbane, Qld 4110.

KT9500 632 VDU P/S cassette interface 7k RAM 2650 M/B KBD5 keyboard 2 BASICS 2 games packs documentation built and working. No cabinet \$450. J Williams, Elizabeth, SA. Phone (08) 255.1053.

KT9500, EA VDU, 6k RAM, cassette interface, keyboard in cases. 10A power supply. Full documentation, fully working \$350. Phone AH (02) 428.3335.

SELL: Unused "Pipbug" monitor ROM (ceramic), as used in 2650 systems. Bargain at \$17. Clive Conway, 80 Third Ave, Joslin, SA 5070.

WANTED: Computer and/or equip't of any type, age or condition suitable for teaching business data processing. Neish, 3 Brisbane Road, Castle Hill 2154 (02) 634.1419.

S100 computer 4 MHz Z80, North Star Dual Disk Drive, flashwriter, 32k RAM, Teletype 43 Printer, 9 parallel 2 serial I/O, software. \$4500, Greg Francis. Bus (065) 43.1066, home (065) 43.3088.

WANTED Tandy TRS-80 Level I computer with recorder VDU CPU. Phone (07) 284.3462 after 5 p.m. Mon-Fri.

SELL MEK 6800 D2 with power supply card cage and back plane ½k RAM. Buffered faultless condition with full documentation \$300 (044) 23.755.

SELL Sheen 100 step programmable calculator plus 852 Scientific National Semiconductor \$42. After 6 p.m. ask for Roy, phone (068) 42.1470.

TANDY TRS-80 level 2 16k mem. Computer includes cassette, monitor, manuals. Extras: editor/assembler, Tbug monitor, line renumberer. \$1150 ONO. Peter Lyons (059) 67.4216 Launching Place 3139.

TRS-80 owners - add a printer - no expansion interface required - RS232 output, including documentation and software to use LLIST and LPRINT commands. For more info write PO Box 122, Bondi Beach, NSW 2026.

TRS-80 Lev II owner would like to correspond with others. Swap programs and ideas on uses, publications, modifications, etc. R Rider, PO Box 26, Weston, ACT 2611.

051 Superboard or C1 owners. Anyone interested in forming a club/users group contact Geoff Cohen, PO Box 73, Lyneham, ACT 2602. Phone (062) 49.3493 (work), 54.7608 (home).

FOR sale computer back plane, 115 edge card sockets - all wire wrap terminations build a super micro. Phone (02) 587.7906 AH. Mr J Freeman \$600 ONO.

COMPUTER system. 2650 4k RAM, EA VDU (110/300 BAUD). Software including BASIC. System complete and working. \$400 phone Ray (02) 938.4767.

MINI computer system complete in single console 2650 4k RAM, VDU, cassette interface, manuals tapes with 28 programs \$600. Phone Paul, Wollongong (042) 61.5451.

TRS-80 program exchange - for more info write R Gareb, 17/37 O'Donnel St, Bondi 2026 or ring (02) 30.8261 AH.

WANTED: Interesting programs for TI 58 e.g. "decimal to N base conversions" or other - will pay. RJ, 14 Dixon Ave, French's Forest, NSW 2086.

COMPLETE 2650 S100 system, 16k RAM, VDU, 300B cassette interface, software, 4k BASIC, 6 slot mother board, PS's, self-supporting cabinet, circuits, etc \$800, Adelaide (08) 270.3115.

FOR sale: ICL 1901A computer 24 bit 16k core storage, twin disc memory 3.7 Megabyte, 40 spare disc, 600 line per min page printer 120 characters wide, ASR33 teletype with service manuals, Holerith card punch and verifier, card reader, complete books 23 volumes, engineering programs on cards. Best offer (077) 72.1111 ex 366 (8 a.m.-4 p.m.).

FOR sale: Micro-computer ICs. New 6800 \$9; 6820 \$5.50; 6821 \$6.50; 6852 \$5.50; 8080A \$9; 8255 \$8; 4 MHz crystals \$4.50; 6875 \$11; S-100 edge connectors, gold-plated, solder-tail, \$4.50 ea. Wire-wrap IC sockets, gold. 14 pin 55 cents; 16 pin 65 cents. All new. Graham AH (03) 89.6918.

MISCELLANEOUS

BOXES of 1% 30k, 110k, 270k, 1M electrosil resistors, transformers PF3755, 60203 and A & R instrument case. Any offers. Phone (07) 351.4653 Brisbane.

WANTED: Equivalent numbers for two transistors, HP-100, P-404 American PNP's. Write: S Waye, 59 Albatross Ave, Victor Harbour, SA 5211. Will be most grateful.

EA 40 MHz Frequency Counter. Kit cost \$99. Sell built up and working for \$60. Phone Chris (Sydney) 85.6098.

RADIO and hobbies wanted May 1939 August 1940 November 1940. Jim Gordon, 6 Graeme Ave, Ringwood, Vic 3134. (03) 870.1745.

FOR sale: AY-3-8760 IC for motorcycle TV game ETI 810. Unused, with circuit and instructions, price \$18. Phone Gary at Goodna (07) 288.2730.

WANTED. Buy or borrow to photostat. Valve-tester model 45C. Please write. George Causbrook, 5 Fox Ave, Orange, NSW. Will pay well.

OSCILLOSCOPE Tektronix type 7603 including plug-in logic analyser, display formatter, dual time base, dual trace amplifier and lab cart. Only 12 months old, rarely used. To be sold to best offer. Mike Kilroy (03) 783.7547.

INTEGRATED circuits approximately 300 latest type IC's. Some diodes, transistors and sockets and plugs. Will sell to best offer. Mike Kilroy (03) 783.7547.

TANDY ELECTRONICS FRANCHISE OPPORTUNITY For established retailers COUNTRY AREAS

Now you can add extra profit, volume, traffic to your store by adding a range of the famous Tandy/Radio Shack Electronic products to your line.

If you have a successful store, (Hardware, Photographic, Furniture, Appliance, Sporting Goods, Toys/Hobbies, Chemist, Radio, TV, etc.) contact us now!

A minimum investment covering inventory and start-up costs can begin a new and exciting association with Tandy — a leader in home entertainment and electronics!

Write or phone:
Mr. E. Epps, Franchise Manager,
Tandy Corporation,
P.O. Box 229, Rydalmere, N.S.W. 2116.
Phone: (02) 638 4333

PLEASE USE BLOCK LETTERS

RADIO DESPATCH SERVICE

THE SPECIALIST STORE

869 George Street, Sydney,
NSW. 2000.
(Near Harris St.)
Phone: 211-0816, 211-0191.

SPECIAL

In order to help our customers, RDS will now make front panels for ETI and EA projects, under order. Write now for particulars and our low prices.
Available on black or silver background by the Scotchcal system. We also keep all PC boards for ETI and EA projects. Write or call for details.

TEXAS INSTRUMENTS

TI 59 Calculator:
\$247 plus s/tax.
TI PC100 Printer:
\$213.57 plus s/tax.

	Excl. S/Tax	Incl. S/Tax
TI-25	\$32.30	\$35.45
TI-30 Student Pack ...	\$20.00	\$22.10
TI-1750	\$17.90	\$20.00
TI-50	\$34.44	\$38.13
TI-55	\$53.00	\$59.00
TI-35	\$40.60	\$44.95
TI-58	\$109.00	\$120.70
TI-5050M	\$81.30	\$90.00
Little Professor	\$15.00	\$16.57
Data Man	\$21.00	\$23.25

Distributors for:

XCELITE Tools

MAIL ORDER CUSTOMERS

\$1.00 packing plus 5 percent of order value up to \$80.00, thence a flat \$4.00 for postal items. Carrier — freight on.

OPEN: Mon-Fri 8am to 5.30pm.
Thursday night late shopping till
8.30pm. Saturday 8am to 11.45am.

BIG SAVING from CEMA on Philips Electrolytic 'RB' style Capacitors

Here are just a few
Phone for our new price list

Capacity (uF)	Voltage (DCW)	Price in bags of 100
1	10	\$ 4.50
2.2	50	\$ 4.50
3.3	50	\$ 4.50
4.7	50	\$ 5.00
10	10	\$ 4.50
22	50	\$ 7.00
33	10	\$ 5.00
47	10	\$ 5.50
100	25	\$ 8.75
220	50	\$ 18.50
330	10	\$ 10.00
470	25	\$ 18.00
1000	16	\$ 21.00
2200	16	\$38.00

Plus \$2 — packaging and freight charge per order

Prices subject to change without notice.

+ tax if applicable



CEMA ELECTRONICS PTY LTD

Sydney 21 Chandos Street,
St. Leonards. 439-4655
Melbourne 208 Whitehorse Road,
Blackburn, Vic. 877-5311
Brisbane 22 Ross Street, Newstead, Qld.
52-4261
Adelaide 170 Sturt Street, Adelaide, S.A.
51-6483
New Zealand 7-9 Kirk Street, Grey Lynn,
Auckland. 76-1169

AGENTS
Canberra
Wollongong
New Guinea


Ortex (062) 82-4995
Macelec (042) 29-1455
Daltron Electronics, Boroko. 25-6616

and soon in Perth and Wellington, N.Z.

The better your ear, the more you need new Audio-Technica VITAL LINKS!

Every wire, every connection in your stereo system is a source of trouble, a chance for losses which can keep your system from achieving its full potential.

Introducing three new Vital Link wire sets from Audio-Technica... each a positive step toward ideal performance and trouble-free operation.



Start at the cartridge with the AT609 Head Shell Wire Set. Color-coded, insulated wires with 14 strands of pure silver Litz wire, terminated in corrosion-free gold terminals. No losses, no intermittents. Easy to install. Just \$6.95 and worth every penny.

Between turntable and amplifier (or any two stereo components) use new AT610a High Conductivity Cable. A stereo pair 60" long, plus an independent ground wire with lugs. Each gold-plated plug is color-coded. Both resistance and capacitance are far below ordinary cables.

For the most critical installations use our AT620 Super-conductivity Cable Set. Two individual cables, each 48" long, with heavily gold-plated plugs. Inside the wire shield is a second conductive layer of polypropylene shielding. Special foam dielectric keeps capacity low, while superb conductivity is assured by using Litz-wire inner conductors with maximum surface area which reduces high frequency losses.

From phonograph cartridge to loud-speaker, each audio system is a chain, no stronger than its weakest link. Connect your system with Vital Link cables from Audio-Technica. At your A-T dealer now. Or write for our complete audio accessory catalog.

audio-technica.
INNOVATION □ PRECISION □ INTEGRITY

Maurice Chapman Group,
44 Dickson St, Artarmon.
2064. Ph: 438-3111.



MATRA

100 WATT R.M.S.

FULL RANGE SPEAKER SYSTEM SUITABLE FOR DISCO/SOUND REINFORCEMENT **\$125** each plus freight

FEATURES —

- Carpet covering • Nickel plated corners • Steel mesh grille • 100 watt special design speaker by Etone • 3/4" timber construction • 2 x phono sockets • Size: 500mm high, 470mm wide, 260mm deep • Impedance: 8 ohms • 2 year warranty.

Also Complete Sound Systems, Disco Systems, Lighting Control Units, Etone/Matra Speakers, Power Amplifiers, Mixers and associated electronics.

TRADE ENQUIRIES WELCOME For further information:

MATRA

MUSICAL INDUSTRIES

3 Staple St, 17 Mile Rocks, Qld. 4073. Ph: (07) 376-4122.

New & exclusive telephone amplifier



IC Telephone Amplifier, Model TA-301.

One of the best there is. All the latest technology — IC circuits, no installation required. Operates on 4 x 1.5V Penlite batteries. Includes recording cord.

Now available from Emona for only **\$24.95** (incl. P&P)

For our full range of products write, phone or call in. Catalogue available.

EMONA ENTERPRISES
PTY. LTD.

Suite 208, 661 George St,
Sydney, 2000. Ph. (02)
212-4815, 211-3038.
MAIL ORDER: PO Box 188,
Coogee, NSW. 2034.



To: EMONA ENTERPRISES Pty. Ltd.
PO Box 188, Coogee, NSW. 2034.

Please send me the IC Telephone Amplifier TA-301. Enclosed is
☐ cheque ☐ money order ☐ or debit my Bankcard, for \$24.95 (incl. P&P).

Bankcard No. Expiry date

Name

Address

Signature P/Code

DATA ENTRY MADE EASY

MR - 500 MARK SENSE CARD READER

NOW ALL YOU NEED IS A STANDARD #2 PENCIL, A CARD, AND THE LOW-COST MR - 500 MARK SENSE CARD READER TO ENTER DATA INTO YOUR MICROCOMPUTER


- READER AND INTERFACES FOR
- APPLE II, TRS-80 & PET \$825.00.
 - S-100 AND RS232C \$985.00.
- (ALL PRICES EX TAX)

*IDEAL FOR EDUCATION AND SMALL BUSINESS APPLICATIONS

For more details contact:

THE ELECTRONIC CIRCUIT

SUIT 414, 4th FLOOR, 20 DUNCAN ST., FORTITUDE VALLEY, QLD. 4006.
P.O. BOX 2, BROADWAY, Q. 4000. Telephone [07] 52-8455

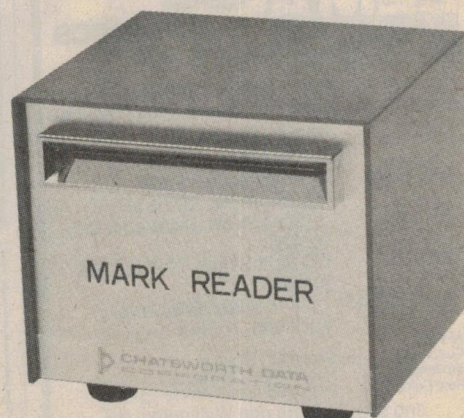

BIG SAVINGS from CEMA on Green Caps

DESCRIPTION: Nissei Polyester
Series: 2020
30 100 VDC
Working

100 volts D.C. Tol $\pm 10\%$

Capacity (uF)	Price in bags of 100
.001	\$5.00
.0012	"
.0015	"
.0018	"
.0022	"
.0027	"
.0033	"
.0039	"
.0047	"
.0056	"
.0068	"
.0082	"
.01	"
.012	"
.015	\$5.30
.018	"
.022	"
.027	"
.033	\$6.00
.039	\$6.30
.047	\$6.75
.056	\$7.00
.068	\$8.00
.082	\$8.50
.1	\$9.75
.12	\$11.00
.15	\$12.00
.18	\$13.50
.22	\$15.50
.27	\$18.00
.33	\$19.00
.39	\$21.00
.47	\$24.00

+ tax if applicable

CEMA

**CEMA
ELECTRONICS
PTY LTD**

Plus \$2 — packaging and freight charge per order. Prices subject to change without notice.

Sydney 21 Chandos Street,
St. Leonards. 439-4655
Melbourne 208 Whitehorse Road,
Blackburn, Vic. 877-5311
Brisbane 22 Ross Street, Newstead, Qld.
52-4261
Adelaide 170 Sturt Street, Adelaide, S.A.
51-6483
New Zealand 7-9 Kirk Street, Grey Lynn,
Auckland. 76-1169

AGENTS
Canberra
Wollongong
New Guinea

Ortex (062) 82-4995
Macelec (042) 29-1455
Daltron Electronics, Boroko. 25-6616

and soon in Perth and Wellington, N.Z.

Swedish efficiency



audio pro

audio pro

Exquisite black ash 3-25 Passive Radiator
Speaker System combines efficiency with
sensitivity and extreme delicacy.

For further details ring or write to:

DEPRO INDUSTRIES Pty. Ltd.
Suite 5, 83 Walker Street, North Sydney. 2060.
Tel: (02) 92-6561.

Please send me details on Audio pro 3-25 speakers
and name of nearest stockist.

Name

Address

..... P/Code

RADCOM constructor components

EVERYTHING FOR
THE CONSTRUCTOR
AT ONE SHOP
AT PRICES TO SUIT
YOUR BUDGET

KITS!

We're moving into kits.
Your enquiries are welcome

SILICON VALLEY STOCKISTS

- CAPACITORS —
- RESISTORS —
- POTS —
- SWITCHES —
- PLUGS —
- SOCKETS —
- PANEL LAMPS —
- TRANSISTORS —
- DIODES —
- BOXES —
- LEDS —
- IC's —

Try us for the
hard-to-get components

Block Capacitors
Silver Micas
High Voltage
etc, etc

Cnr. Eldridge & Willfox Rds.
BANKSTOWN. NSW.
709-4706

KITS for projects

WE GET MANY enquiries from readers wanting to know where they can get kits for the projects we publish. This list is a guide to suppliers of kits and components for ETI projects.

We have only listed the projects published in the last two years, with their dates of publication, so this page can also be used as an index, even though kits are not available for some of them (as far as we know). Any companies who wish to be included in this list should phone Jan Collins on 334282.

Printed circuit boards

Those suppliers listed against specific projects here are able to supply pc boards for those projects. Printed circuit boards for every project ever published in ETI are available through the following companies (to the best of our knowledge):

RCS Radio Radio Despatch Service
651 Forest Rd 869 George St
Bexley NSW Sydney NSW 2000

Work on updating this list is currently in progress. Letters have been sent to suppliers and a full update will appear shortly.

Key to Companies

A: Applied Technology Pty Ltd, 1A Paterson Avenue, Waitara, NSW 2077.
B: Bill Edge Electronic Agencies, 115 Parramatta Road, Concord, (PO Box 1005, Burwood North 2134).
C: J.R. Components, PO Box 128, Eastwood NSW 2122.
D: Dick Smith Electronics P/L, PO Box 747, Crows Nest, NSW 2065.
E: All Electronic Components, 118 Lonsdale Street, Melbourne, Vic 3000.
J: Jaycar Pty Ltd, PO Box K39, Haymarket, NSW 2000.
K: S M Electronics, 10 Stafford Court, Doncaster East, Vic 3109.
L: Tasman Electronics, 12 Victoria Street, Coburg Vic 3058.
M: Mode Electronics, PO Box 365, Mascot, NSW 2020.
N: Nebula Electronics Pty Ltd, 15 Boundary Street, Rushcutters Bay, NSW 2011.
O: Orbit Electronics, PO Box 7176, Auckland, New Zealand.
P: Pre-Pak Electronics, 718 Parramatta Road, Croydon, NSW 2132.
R: Rod Irving Electronics, Shop 499, High Street, Northcote, (P.O. Box 135), Vic 3070. Phone (03) 489-8131.
T: Townsville Electronic Centre, 281E Charters Towers Road, Rising Sun Arcade, Townsville Qld 4812.
V: Silicon Valley, 23 Chandos Street, St Leonards, NSW 2065.

Project Electronics

041	Continuity Tester	T,D,B
042	Soil Moisture Indicator	T,D,B
043	Heads or Tails Circuit (Oct 76)	T,D,E,A,B,L
044	Two Tone Door Bell (Oct 76)	T,D,E,O,A,B,L
045	500 Second Timer	T,D,O,A,B
047	Morse Practice Set	T,D,O,A,B
048	Buzz Board	T,D,A,B
061	Simple Amplifier (Oct 76)	T,D,O,A,B
062	Simple AM Tuner (Mar 77)	D,E,B
063	Electronic Bongos	D,A,B
064	Simple Intercom (Nov 76)	T,O,A,B
065	Electronic Siren	D,O,A
066	Temperature Alarm (Dec 76)	T,D,E,A,B
067	Singing Moisture Meter	D,B
068	LED Dice Circuit (Oct 76)	T,D,E,A,B
070	Electronic Tie Breaker (Jan 77)	
071	Tape Noise Limiter (Jan 78)	E,L
072	Two-Octave Organ (Jun 78)	D,B
081	Tachometer (Mar 77)	T,E,O
082/		
528	Intruder Alarm	T,E,A
083	Train Controller	
084	Car Alarm	D,A,B
085	Over-rev Alarm	
086	FM Antenna	
087	Over-LED	
088	Hi-Fi Speaker	

Test Equipment

132	Experimenter's Power Supply (Feb 77)	E
133	Phase Meter (Apr 77)	E
134	True RMS Voltmeter (Aug 77)	E
135	Digital Panel Meter (Oct 77)	E
136	Linear Scale Capacitance Meter (Mar 78)	E
137	Audio Oscillator (May 78)	E
138	Audio Wattmeter (Nov 78)	
139	SWR/Power Meter (May 78)	
140	1 GHz Frequency Meter-timer (Mar 78)	C
141	Logic Trigger (Jan 79)	
142	High Current Power Supply (Feb 79)	E
143	Curve Tracer (Jan 79)	
144	Expanded-scale RMS Voltmeter (Jun 79)	
148	Logic Test Probe (Jul 79)	

Simple Projects

243	Bip Beacon (Apr 77)	
244	Alarm Alarm (Feb 77)	
245	White Line Follower (Nov 77)	
246	Rain Alarm (Apr 78)	L
248	Simple 12V to 22V Converter (Jul 78)	
249	Combination Lock (Apr 79)	E
253	'Hot Potato' Game (May 79)	
254	Egg Timer (Jun 79)	

Motorists' Projects

316	Transistor Assisted Ignition (May 77)	D,O,E
317	Rev Monitor Counter (Jul 77)	E
319	Variwiper MK II (Sep 78)	E
320	Battery Condition Indicator (Apr 79)	D,E

Audio Projects

448	Disco Mixer (Nov 76)	
449	Balanced Microphone Amp (Nov 76)	J,E,L
450	Bucker Brigade Audio Delay Line (Dec 77)	
451	Hum Filter (July 79)	D
470	60 W Amp Module (May 79)	A,B,E,P,R,S
471	Stereo Preamp (June 79)	A,B,E,P,R,S
480	50-100 Watt Amp Modules (Dec 76)	J,E,D,O,R,A,,B,L
481	12 V 100 Watt Audio Amp (May 77)	E
481	High Power PA/ Guitar Amp (Jun 77)	O
482	Stereo Amp (Jan 77)	O,E
482	Stereo Amp Part 2 (Feb 77)	O,E
483	Sound Level Meter (Feb 78)	E
484	Simple Compressor Expander (Jul 77)	E
485	Graphic Equalizer (Jun 77)	J,E
486	Gowl-round Stabilizer (Nov 77)	J
487	Audio Spectrum Analyser (Feb 78)	E
489	Audio Spectrum Analyser 2 (Apr 78)	J,E
490	Audio Compressor (Dec 79)	
491	Graphic Equaliser (Mar 79)	
495	Transmission Line Speakers (Aug 77)	

Miscellaneous

546	GSR Monitor (Mar 77)	E
547	Telephone Bell Extender (Jun 77)	E
548	Photographic Strobe (May 77)	E
549	Induction Balance Metal Detector (May 77)	E
550	Digital Dial (Aug 78)	E
551	Light Chaser (Sep 78)	E
552	LED Pendant (Sep 78)	
553	Tape/Slide Synchroniser (Oct 78)	E
556	Wind Speed/Direction Indicator (Dec 79)	
557	Reaction Tester (Feb 79)	E
558	Mast-head Strobe (Feb 79)	
559	Cable Tester (Mar 79)	
581	Dual Power Supply (Jan 77)	E
582	House Alarm (Jul 77)	T,O,E,A
	House Alarm — Installation Instructions (Aug 77)	
583	Marine Gas Alarm (Aug 77)	E,E
585	Ultrasonic Switch (Sep 77)	R,O,E,T,L
586	Shutter Speed Timer (Oct 77)	E
587	UFO Detector (May 78)	
588	Theatrical Lighting Controller (Nov & Dec 77 Jan & Mar 78)	N
589	Digital Temperature Meter (PCB135) (Dec 77)	E
590	LCD Stopwatch (Oct 78)	N
591	Up/Down Presettable Counter (Jul 78)	E
592	Light Show Controller (Aug 78)	E
593	Colour Sequencer (Dec 79)	
594	Development Timer (Apr 79)	
595	Aquarium Light Controller (May 79)	

Electronic Music

602	Mini Organ (Aug 76)	O,E,D,B
603	Sequencer (Aug 77)	
604	Accentuated Beat Metronome (Sep 77)	E
605	Temp Stabilized Log-exponential Converter (Sep 78)	

Computer Projects


630	Hex Display (Dec 76)	E,A
631	ASCII Keyboard (Dec 78)	O,E,A
631	Keyboard Encoder (Apr 77)	O,E,A
632	Video Display Unit (Jan-Mar 77)	O,A
633	TV Sync Generator (Jan 77)	E,A
634	8080 Educational/Prototyping Interface (Jul, Aug 78)	
635	Microcomputer Power Supply (Sep 77)	
637	Cuts Cassette Interface (Jan 78)	V,O,E,A
638	Eprom Programmer (Jul 78)	E,A
639	Computerised Musical Doorbell (Mar 78)	A
640	S100 VDU (Apr, Jun 78)	V,O,A
641	S100 Printer (Sep 78)	
642	16k S100 RAM Card (Feb 79)	K
650	STAC Timer (Nov 78)	
651	Binary/hex Trainer (Jun 79)	

Radio Projects

712	CB Power Supply (Jun 77)	O,E
713	Add-on FM Tuner (Sep 77)	
714	VHR-Log-Periodic Antenna (Feb, Mar 78)	
715	VHF Power Amplifiers (Nov 77)	
716	VHF Power Amplifiers (Jan, Feb 78)	
717	Crosshatch Generator (May 78)	E
718	SW Radio (Oct 78)	E
719	RF Field Strength Indicator (Nov 78)	
720	2 m VMOS Power Amp (Jan 79)	
721	Aircraft Band Converter (Mar 79)	D,E
722	Antenna for ETI-721 (May 79)	
724	Microwave Oven Leak Detector (Jul 79)	D

Electronic Games

804	Selectagame (Nov 76)	O
804	Selectagame (Rifle Project) (Mar 77)	O
805	Puzzle of the Drunken Sailor (Oct 77)	
806	Skeet (Jan 78)	
810	Stunt Cycle TV Game (Jun 78)	O,D,B
811	TV Tank Game (Oct 78)	O,E,D,B
812	Wheel of Fortune (Dec 79)	
813	Race Track Game (Jan 79)	

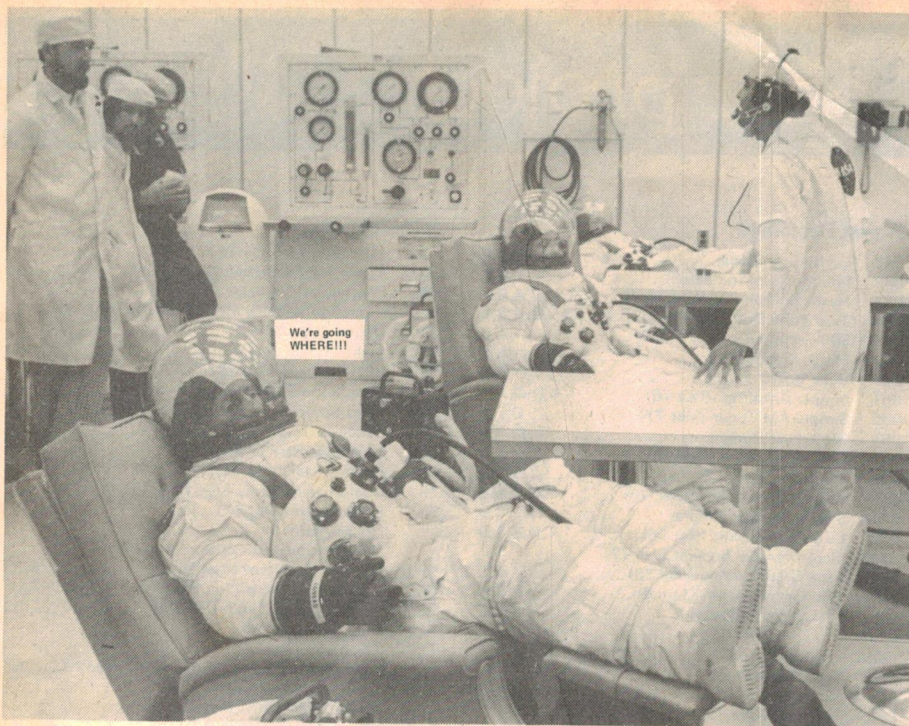

One day, one day . . .

Some time next year there's going to be ten very happy PR people in Sydney and Melbourne. They'll be happy because we're planning an issue in which we'll print their releases just as they sent them.

The ensuing jollity may be shortlived because our readers and their benefactors will read them too — and see just what tauritic coprolitia is often made of technical news by non-technical PRactioners.

And when the law of defamation is changed we might even describe the odd press function as it **really** happened.

Like when the man told us six times that his cassette deck "was so simple even a child could use it". And how, two hours later — and in front of 50% of Oz's technical writers — he and his colleagues were still unable to demonstrate even the simpler functions — on three identical units. And how he later cancelled several thousand dollars worth of advertising when we had the temerity to question the wisdom of it all.

Or like the function we and four score engineering heavies attended recently — where two hours and ten minutes after kick-off, technicians were still frantically setting up the demo equipment. How the lengthy introductory speech was presented **in Japanese** to an astonished 100% -Australian-speaking audience. We might even be able to tell you more about the audio presentation following that speech — how, throughout a demonstration of the system's extended dynamic range a man was clearly visible kneeling under the table winding the amplifier gain up and down in sync. And we are **not kidding**.

There are in Australia about thirty or so good electronics PR people. Some of these work for the big organisations who know what it's all about anyway. Like Philips, HP, Rank etc. The remaining few are free-lance or work for agencies. And they are worth their weight in gold.

But if you need PR and you don't employ one of those estimable gentlepeople then for the sake of your name and our sanity do it yourself. It's inconceivable that you'd do it worse than many of the remainder. (Writs etc should be served on the writer — who was Collyn Rivers — Ed!).



DURING the early years of the editor's career (!) he worked for a period as a development technician with a Melbourne firm that, amongst other things, produced pipe and cable locators. These illustrious machines (solid-state . . . even then!) were not advertised generally to the public at large but were sold to Government departments, some large excavation firms and local utilities. For their purpose, they performed very well and it was pleasing to see the occasional device being used by some public service technician tracing buried pipes or cable beside the roadway.

By some means or other that one can only guess at, the pipe and cable locators came to the attention of certain individuals of the public at large who had other interests in mind. From time to time the firm would receive slightly baffling phone calls from said individuals of the public at large. The poor woman who answered incoming calls would have to sort out, from a lengthy and often incoherent diatribe, what the caller wanted. Inevitably, the "technical" staff would have to deal with the call. What did they want? A metal (read "precious metal") detector!

Would our pipe and cable locator find gold? (always the first question . . . or the first coherent question, anyway). "No", was the gentle reply. Or, not unless it was a nugget having the dimensions of the local sewer main or at least as big as the famous 'Welcome Stranger' (which weighed damn near 70 kg and was the size of a small car engine). Well, the devices could do better than that but the firm really didn't want to get into retailing them. Dealing patiently with people who do not understand the principles involved, let alone the technicalities, is great for teaching one patience.

One nutter a week was about average and the calls were all very similar . . . except for one notable exception.

This fellow wanted an instrument that had a meter on the front panel that would indicate 'gold', 'silver' 'iron', 'diamonds', etc would work in water, underground or from an aircraft, and . . . he was willing to pay a large sum of money for the firm to develop such an instrument!

The firm is still producing the same pipe and cable locator to this day (with minor improvements). They still get calls . . .

REAL HI-FI

AND IT'S ALL IN OUR COLOUR CATALOGUE

The truth is, JVC have always produced real hi-fi components and we believe this current range represents JVC's finest range ever. Here are some real innovations and performance features to whet your appetite:— Quartz locked turntables with uncanny accuracy; Receivers/Amplifiers, some with built-in SEA Graphic Equaliser and DC, class A/B amplification; Cassette deck with JVC automatic computerised tape tuning; Computer designed

speaker systems; Separate but matching JVC components designed to compliment one another, perfectly. And all this real hi-fi know-how is yours ...merely for the asking.



**If you think they look different,
wait till you've heard them!**

FREE OFFER COLOUR HI-FI CATALOGUE

Just fill out this coupon and we'll fill you in on what's available and new in terms of JVC hi-fi entertainment...and it's all FREE!

Name _____

Address _____

Postcode _____

WT1323/ETI/79

I am especially interested in...

- ☐ Cassette Decks
- ☐ Matching Systems ☐ Amplifiers
- ☐ Speakers
- ☐ Turntables
- ☐ Receivers

Just address your envelope to...
JVC Hi-Fi Advisory
Service,
Post Office Box 307,
North Ryde,
N.S.W. 2113

JVC

the right choice

THE DIFFERENCE IS STAGGERING.



Technics Linear Phase speaker systems were designed to reproduce music that sounds as close as possible to the original. Through exhaustive research Technics engineers designed and built equipment to find out exactly how sound travels at different frequencies. Then oscilloscopes were used to shape the revolutionary "staggered" design of the separate wide-range speaker units, so the sound from each reaches you simultaneously. So far as listening pleasure is concerned linear phasing means pure musical reproduction with brilliance when

brilliance is needed and clarity in the softest as well as the loudest musical passages.

Shown above is the SB-7000, Technics' best selling linear phase speaker, and the SB-007 system. This is an exact image of its famous big brother in terms of performance capabilities as much as appearance. But around half the size . . . and cost. So now true linear phase response can be enjoyed in a convenient, compact format.

Technics linear phase speakers. A new experience in realism.

For a National Technics catalogue, please write to:
National Technics Advisory Service, P.O. Box 49, Kensington, N.S.W. 2033.



Technics

hi-fi